



COLOMBO


CASA DEL CUSCINETTO

TESTE A SNODO

Teste a snodo serie JAM

Accoppiamento

Acciaio/Bronzo

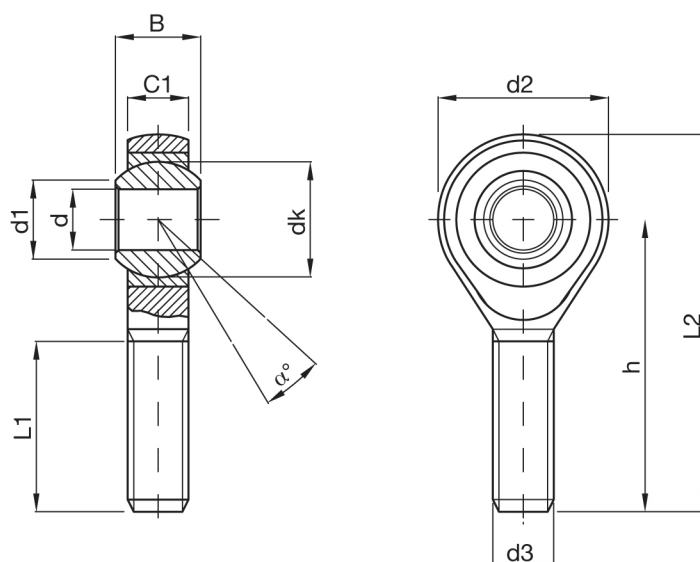


codice	Dimensioni (mm)										Carico Limite (Kg)		Peso g
	d	B	C1	d1	d2	h	L2	L1	dk	d3	Radiale	Assiale	
JAM 5	5	8	7	7.71	16	33	41	20	11.11	M 5X0.8	330	230	14
JAM 6	6	9	7	8.96	18	36	45	22	12.70	M 6X1	460	270	19
JAM 8	8	12	9	10.40	22	42	53	25	15.88	M 8X1.25	840	430	36
JAM 10	10	14	11	12.92	26	48	61	29	19.05	M 10X1.5	1340	630	60
JAM 12	12	16	12	15.43	30	54	69	33	22.23	M 12X1.75	1650	800	89
JAM 14	14	19	14	16.86	34	60	77	36	25.40	M 14X2	2090	1070	129
JAM 15	15	20	14	18.12	36	63	81	38	26.99	M 14X2	2220	1130	148
JAM 16	16	21	15	19.39	38	66	85	40	28.58	M 16X2	2470	1290	181
JAM 17	17	22	16	20.63	40	69	89	42	30.16	M 16X1.5	2730	1450	206
JAM 18	18	23	17	21.89	42	72	93	44	31.75	M 18X1.5	2990	1620	250
JAM 20	20	25	18	24.38	46	78	101	47	34.93	M 20X1.5	3460	1890	333
JAM 22	22	28	20	25.84	50	84	109	51	38.10	M 22X1.5	4070	2290	430
JAM 25	25	31	22	29.60	56	94	122	57	42.86	M 24X2	4950	2830	575
JAM 28	28	35	25	32.29	62	103	134	62	47.63	M 27X2	6050	3570	795
JAM 30	30	37	26	34.81	67	110	143.5	66	50.80	M 30X2	7340	3960	996

Per filettature sinistre aggiungere il suffisso L (Ex: JAML 5)

Teste a snodo serie JAF

Accoppiamento

Acciaio/Bronzo

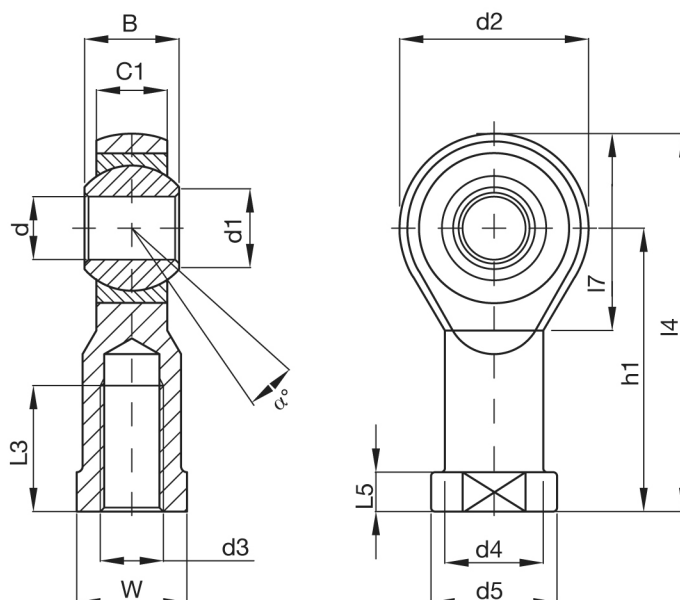


codice	Dimensioni (mm)														Carico Limite (Kg)		Peso g
	d	B	C1	d1	d2	H1	I4	L3	d5	W	d4	L5	I7	d3	Radiale	Assiale	
JAF 5	5	8	7	7.71	16	27	35	14	12	9	9	4	11.11	M 5X0.8	620	230	18
JAF 6	6	9	7	8.96	18	30	39	14	13	11	10	5	12.70	M 6X1	690	270	26
JAF 8	8	12	9	10.40	22	36	47	17	16	14	12.5	5	15.88	M 8X1.25	990	430	45
JAF 10	10	14	11	12.92	26	43	56	21	19	17	15	6.5	19.05	M 10X1.5	1340	630	76
JAF 12	12	16	12	15.43	30	50	65	24	22	19	17.5	6.5	22.23	M 12X1.75	1650	800	114
JAF 14	14	19	14	16.86	34	57	74	27	25	22	20	8	25.40	M 14X2	2090	1070	158
JAF 15	15	20	14	18.12	36	61	79	30	26	22	21	8	26.99	M 14X2	2220	1130	186
JAF 16	16	21	15	19.39	38	64	83	33	27	22	22	8	28.58	M 16X2	2470	1290	200
JAF 17	17	22	16	20.63	40	67	87	34	31	27	24	10	30.16	M 16X1.5	2730	1450	259
JAF 18	18	23	17	21.89	42	71	92	36	31	27	25	10	31.75	M 18X1.5	2990	1620	288
JAF 20	20	25	18	24.38	46	77	100	40	37	32	27.5	10	34.93	M 20X1.5	3460	1890	372
JAF 22	22	28	20	25.84	50	84	109	43	37	32	30	12	38.10	M 22X1.5	4070	2290	475
JAF 25	25	31	22	29.60	56	94	122	48	42	36	33.5	12	42.86	M 24X2	4950	2830	673
JAF 28	28	35	25	32.29	62	103	134	53	46	41	37.5	12	47.63	M 27X2	6050	3570	910
JAF 30	30	37	26	34.81	67	110	143.5	56	50	41	40	15	50.80	M 30X2	7370	3960	1050

Per filettature sinistre aggiungere il suffisso L (Ex: JAML 5)

Snodi sferici radiali serie JAS

Accoppiamento


Acciaio/Bronzo

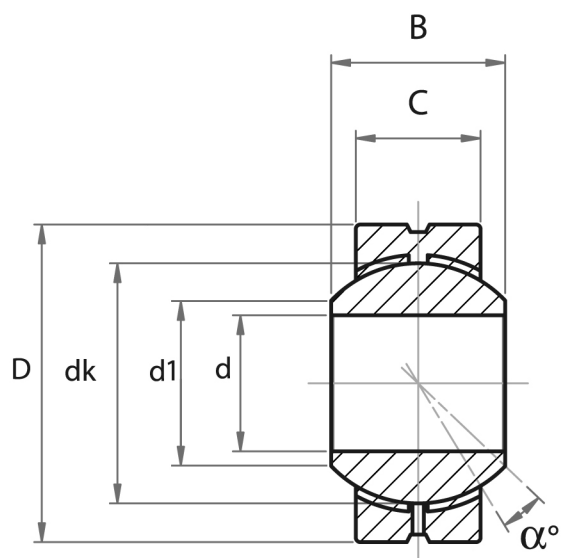

codice	Dimensioni (mm)						Carico Limite (Kg)		Peso g
	d	B	C	d1	D	dk	Radiale	Assiale	
JAS 5	5	8	6	7.71	16	11.11	930	230	18
JAS 6	6	9	6.75	8.96	18	12.70	1070	270	26
JAS 8	8	12	9	10.40	22	15.88	1720	430	45
JAS 10	10	14	10.5	12.92	26	19.05	2510	630	76
JAS 12	12	16	12	15.43	30	22.23	3200	800	114
JAS 14	14	19	13.5	16.86	34	25.40	4270	1070	158
JAS15	15	20	14	18.12	36	26.99	4530	1130	186
JAS 16	16	21	15	19.39	38	28.58	5140	1290	200
JAS 17	17	22	16	20.63	40	30.16	5790	1450	259
JAS 18	18	23	16.5	21.89	42	31.75	6480	1620	288
JAS 20	20	25	18	24.38	46	34.93	7540	1890	372
JAS 22	22	28	20	25.84	50	38.10	9140	2290	475
JAS 25	25	31	22	29.60	56	42.86	11320	2830	673
JAS 28	28	35	25	32.29	62	47.63	14290	3570	910
JAS 30	30	37	25	34.81	66	50.80	15850	3960	1050

Snodi angulari serie AS

Acciaio

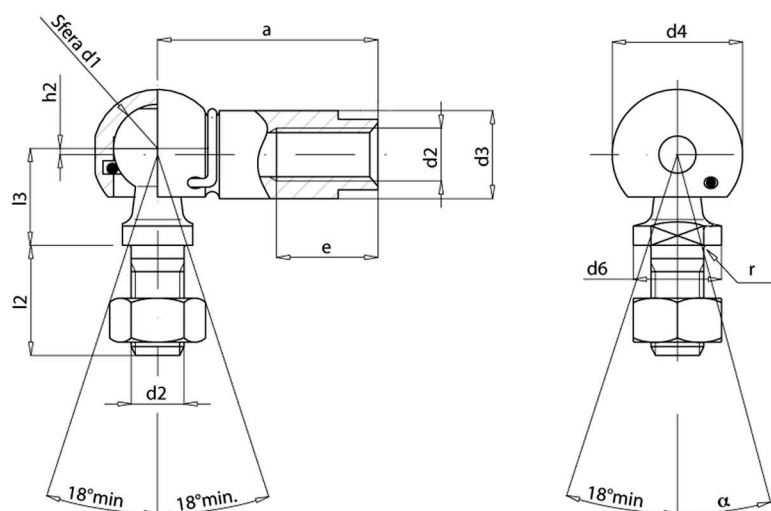

codice	Dimensioni (mm)								Carico Limite (Kg)			Peso g
	d1	d2	a	d3	d4	d6	e	h2	l2	l3	r	
AS 8 M5	8	M5	22	8	12.8	8	10.2	0.65	10.2	9	0.3	15
AS10 M6	10	M6	25	10	14.8	10	11.5	0.65	12.5	11	0.3	25
AS13 M8	13	M8	30	13	19.3	13	14	1.15	16.5	13	0.5	53
AS16 M10	16	M10	35	16	24	16	16	1.15	20	16	0.5	104
AS16 M12	16	M12	35	16	24	16	16	1.15	20	16	0.5	150
AS19 M14x1.5	19	M14x1.5	45	22	30	19	21.5	0.5	28	20	0.8	221
AS19 M14x2	19	M14	45	22	30	19	21.5	0.5	28	20	0.8	221
AS19 M16	19	M16	45	22	30	19	21.5	0.5	28	20	0.8	221

