


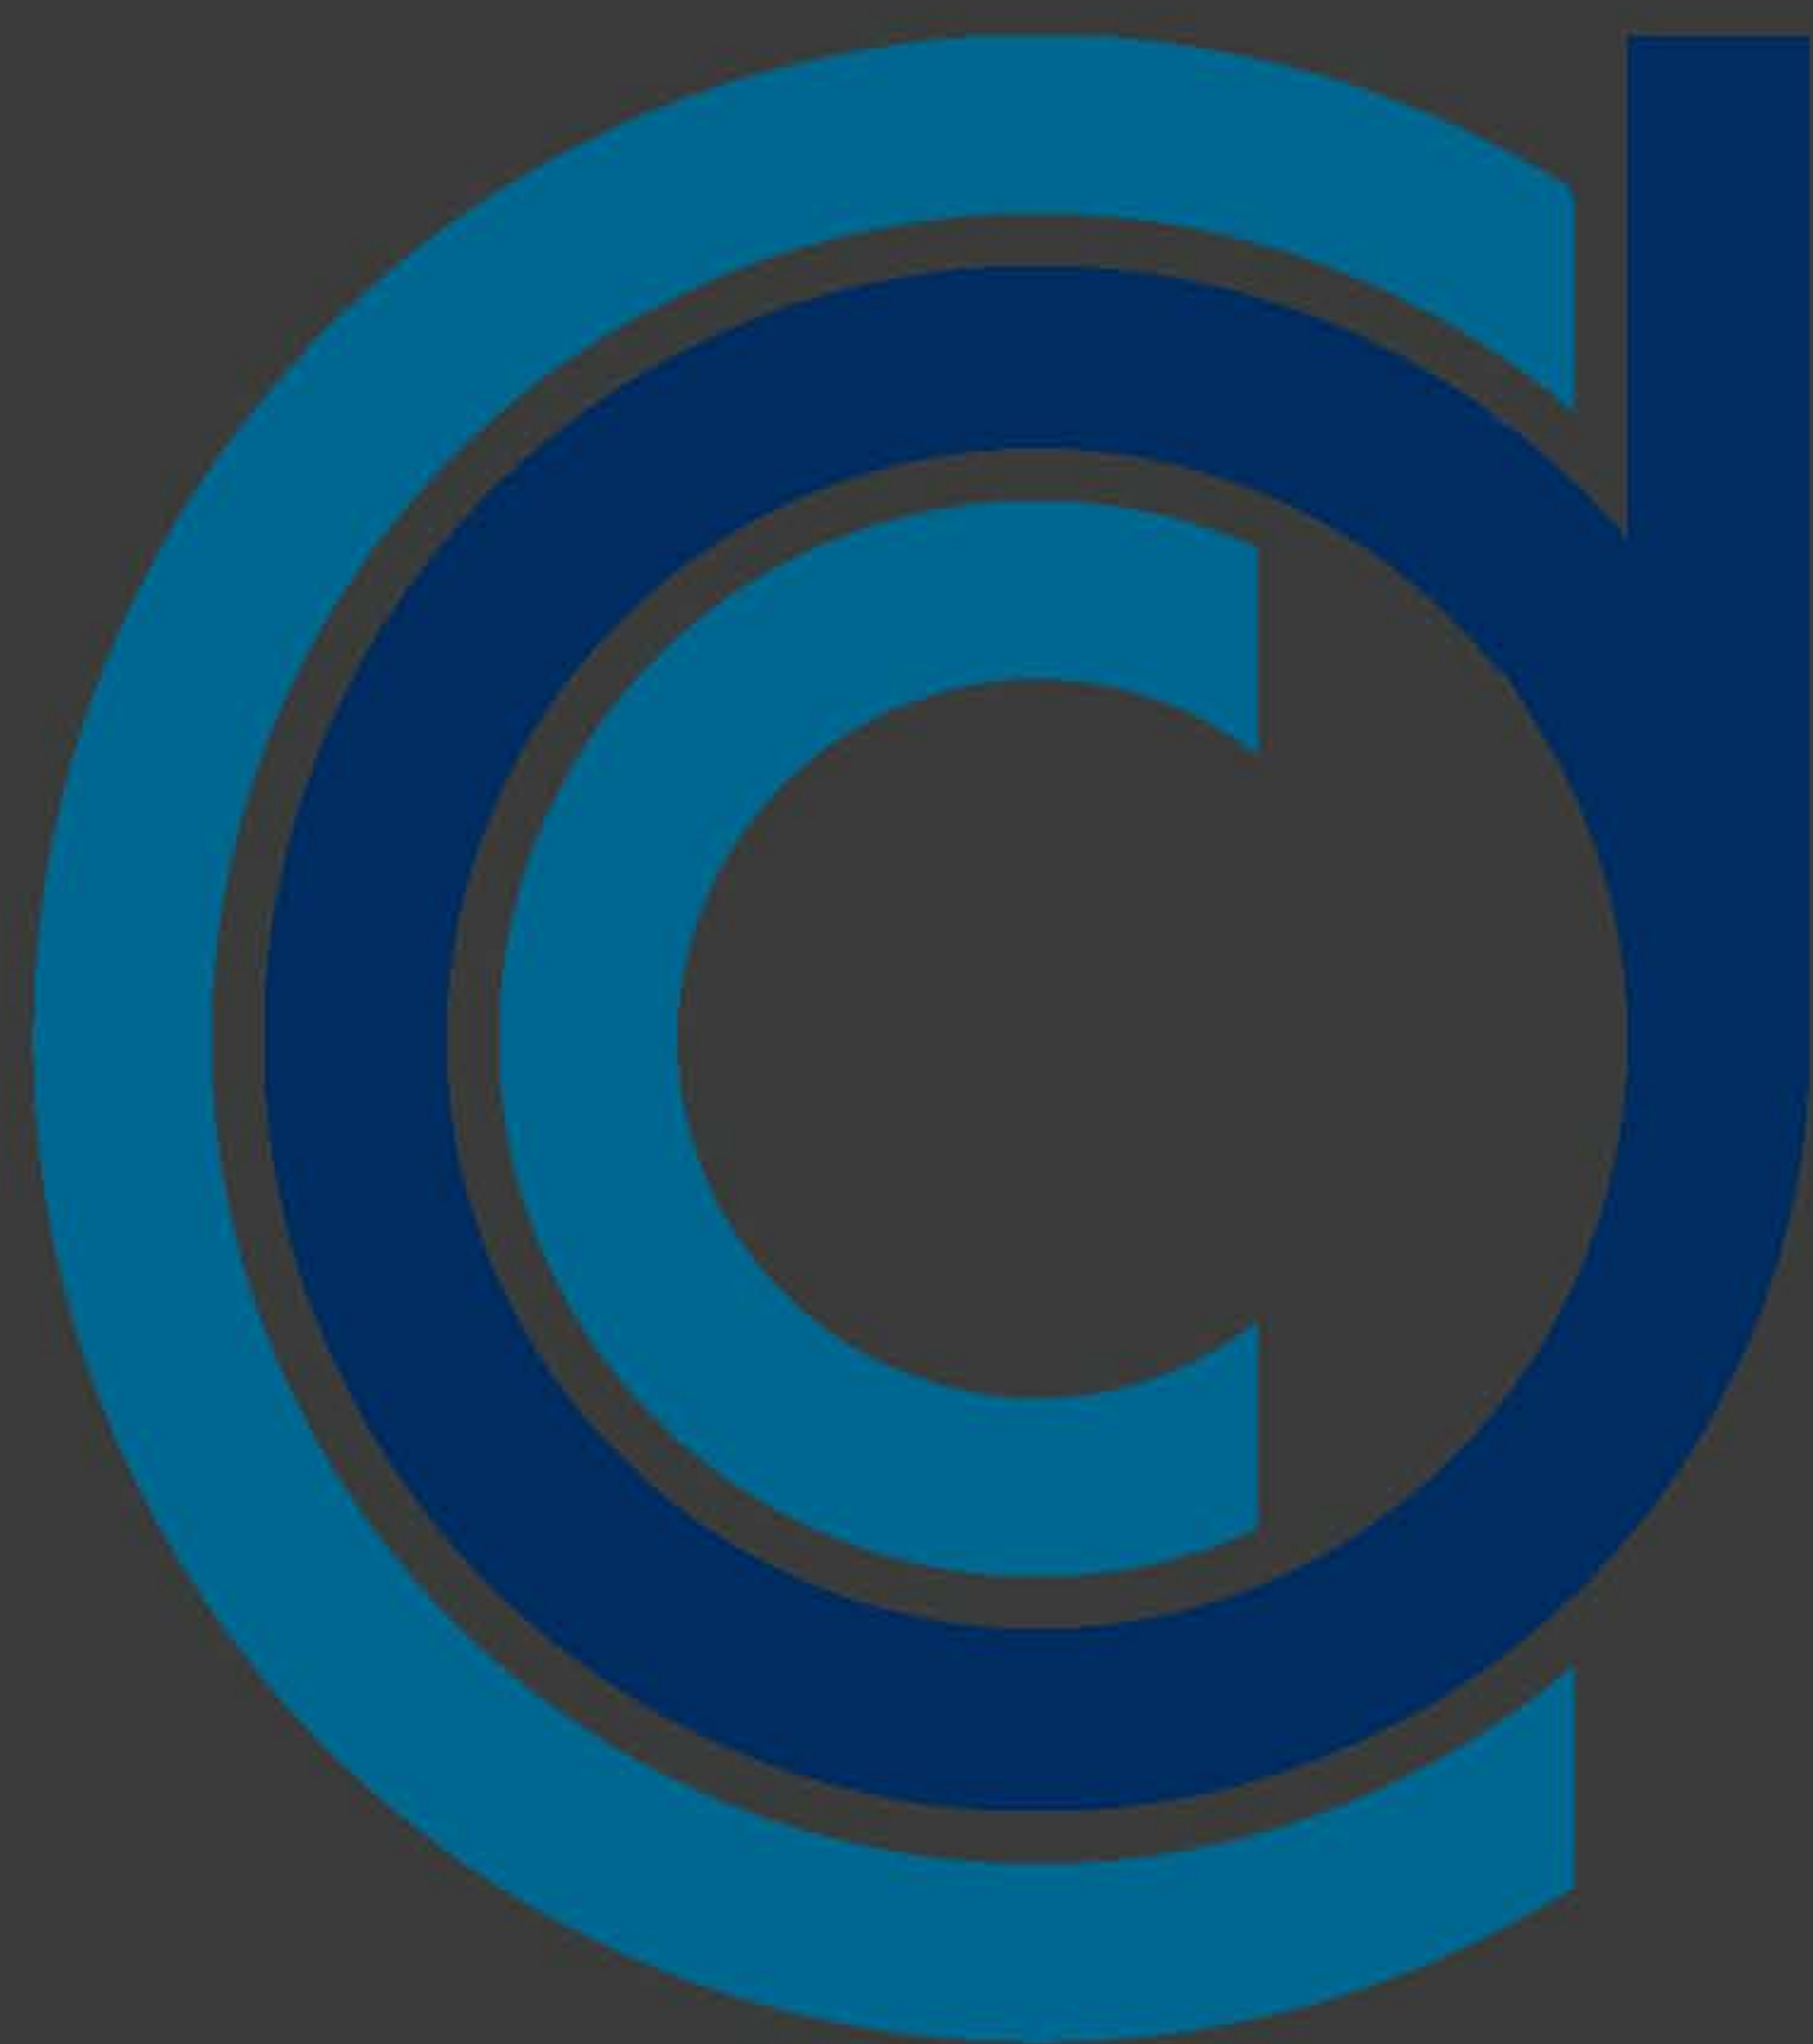

COLOMBO



CASA DEL CUSCINETTO

PULEGGE

XL 037

Passo 1/5" (5,08 mm)

Per cinghie larghezza 3/8" (9,52 mm)

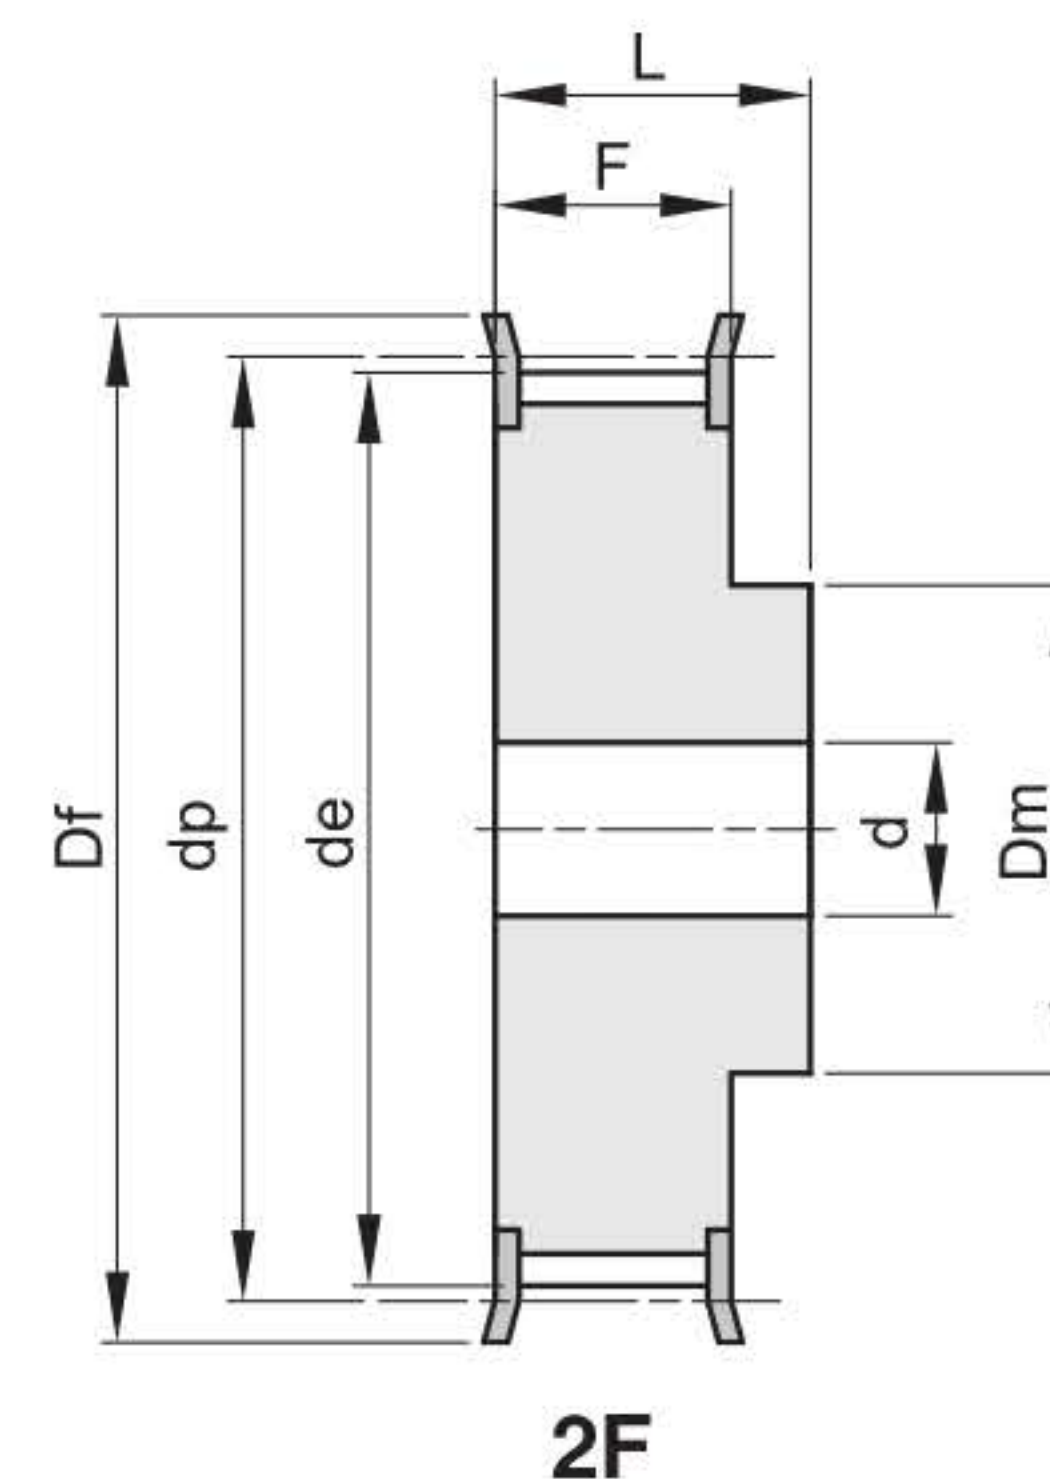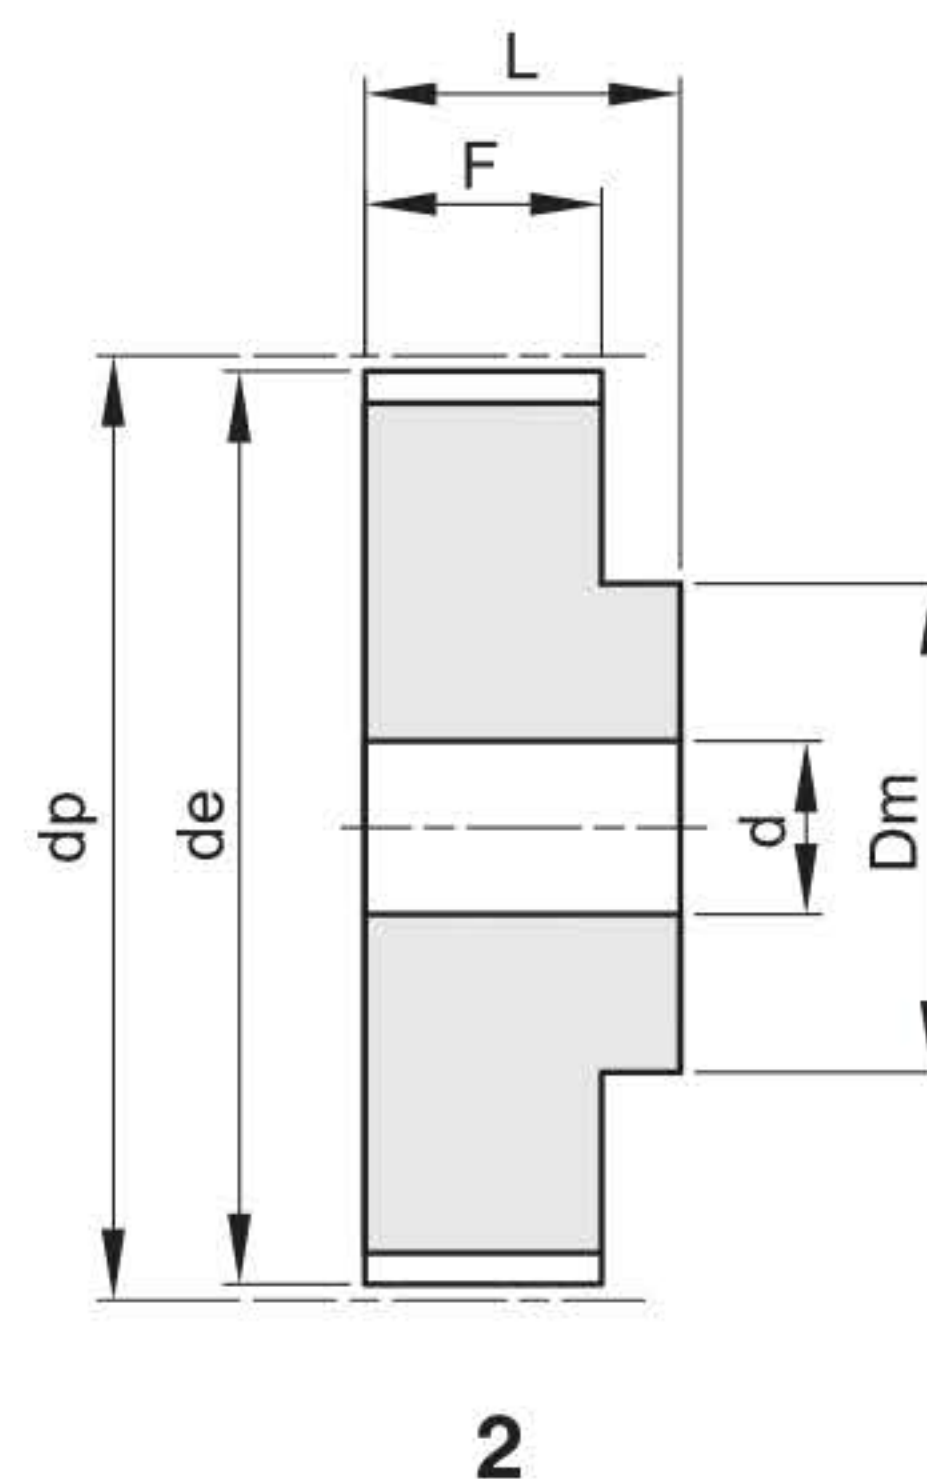


codice	tipo	materiale	denti	dp	de	Df	Dm	F	L	d	n° flangia	Kg.
10 XL 037	2F	Al	10	16,17	15,66	23	10	14,3	20		201	0,01
11 XL 037	2F	Al	11	17,79	17,28	23	10	14,3	20		201	0,01
12 XL 037	2F	Al	12	19,40	18,90	25	10	14,3	20		203	0,01
13 XL 037	2F	Al	13	21,02	20,51	25	10	14,3	20		203	0,01
14 XL 037	2F	Al	14	22,64	22,13	28	16	14,3	20		204	0,02
15 XL 037	2F	Al	15	24,25	23,75	28	16	14,3	20		204	0,02
16 XL 037	2F	Al	16	25,87	25,36	32	16	14,3	20		205	0,03
17 XL 037	2F	Al	17	27,49	26,98	32	20	14,3	20		205	0,03
18 XL 037	2F	Al	18	29,11	28,60	36	20	14,3	20		206	0,04
19 XL 037	2F	Al	19	30,72	30,21	36	20	14,3	22		206	0,04
20 XL 037	2F	Al	20	32,34	31,83	38	25	14,3	22		207	0,05
21 XL 037	2F	Al	21	33,96	33,45	38	25	14,3	22		207	0,05
22 XL 037	2F	Al	22	35,57	35,07	42	25	14,3	22		208	0,06
24 XL 037	2F	Al	24	38,81	38,30	44	30	14,3	22		209	0,06
26 XL 037	2F	Al	26	42,04	41,53	48	30	14,3	22	8	210	0,09
27 XL 037	2F	Al	27	43,66	43,15	48	34	14,3	22	8	210	0,09
28 XL 037	2F	Al	28	45,28	44,77	51	34	14,3	22	8	211	0,10
30 XL 037	2F	Al	30	48,51	48,00	54	38	14,3	22	8	212	0,12
32 XL 037	2F	Al	32	51,74	51,24	57	38	14,3	25	8	213	0,12
34 XL 037	2F	Al	34	54,98	54,47	60	38	14,3	25	8	214	0,13
35 XL 037	2F	Al	35	56,60	56,09	63	38	14,3	25	8	215	0,14
36 XL 037	2	Al	36	58,21	57,70		45	14,3	25	8		0,14
38 XL 037	2	Al	38	61,45	60,94		45	14,3	25	8		0,15
40 XL 037	2	Al	40	64,68	64,17		45	14,3	25	8		0,16
42 XL 037	2	Al	42	67,91	67,41		45	14,3	25	8		0,18
44 XL 037	2	Al	44	71,15	70,64		45	14,3	25	8		0,19
48 XL 037	2	Al	48	77,62	77,11		45	14,3	25	10		0,19
52 XL 037	2	Al	52	84,08	83,57		45	14,3	25	10		0,19
60 XL 037	2	Al	60	97,02	96,51		45	14,3	25	10		0,22
72 XL 037	2	Al	72	116,42	115,92		45	14,3	25	10		0,44

L 050

Passo 3/8" (9,525 mm)

Per cinghie larghezza 1/2" (12,7 mm)

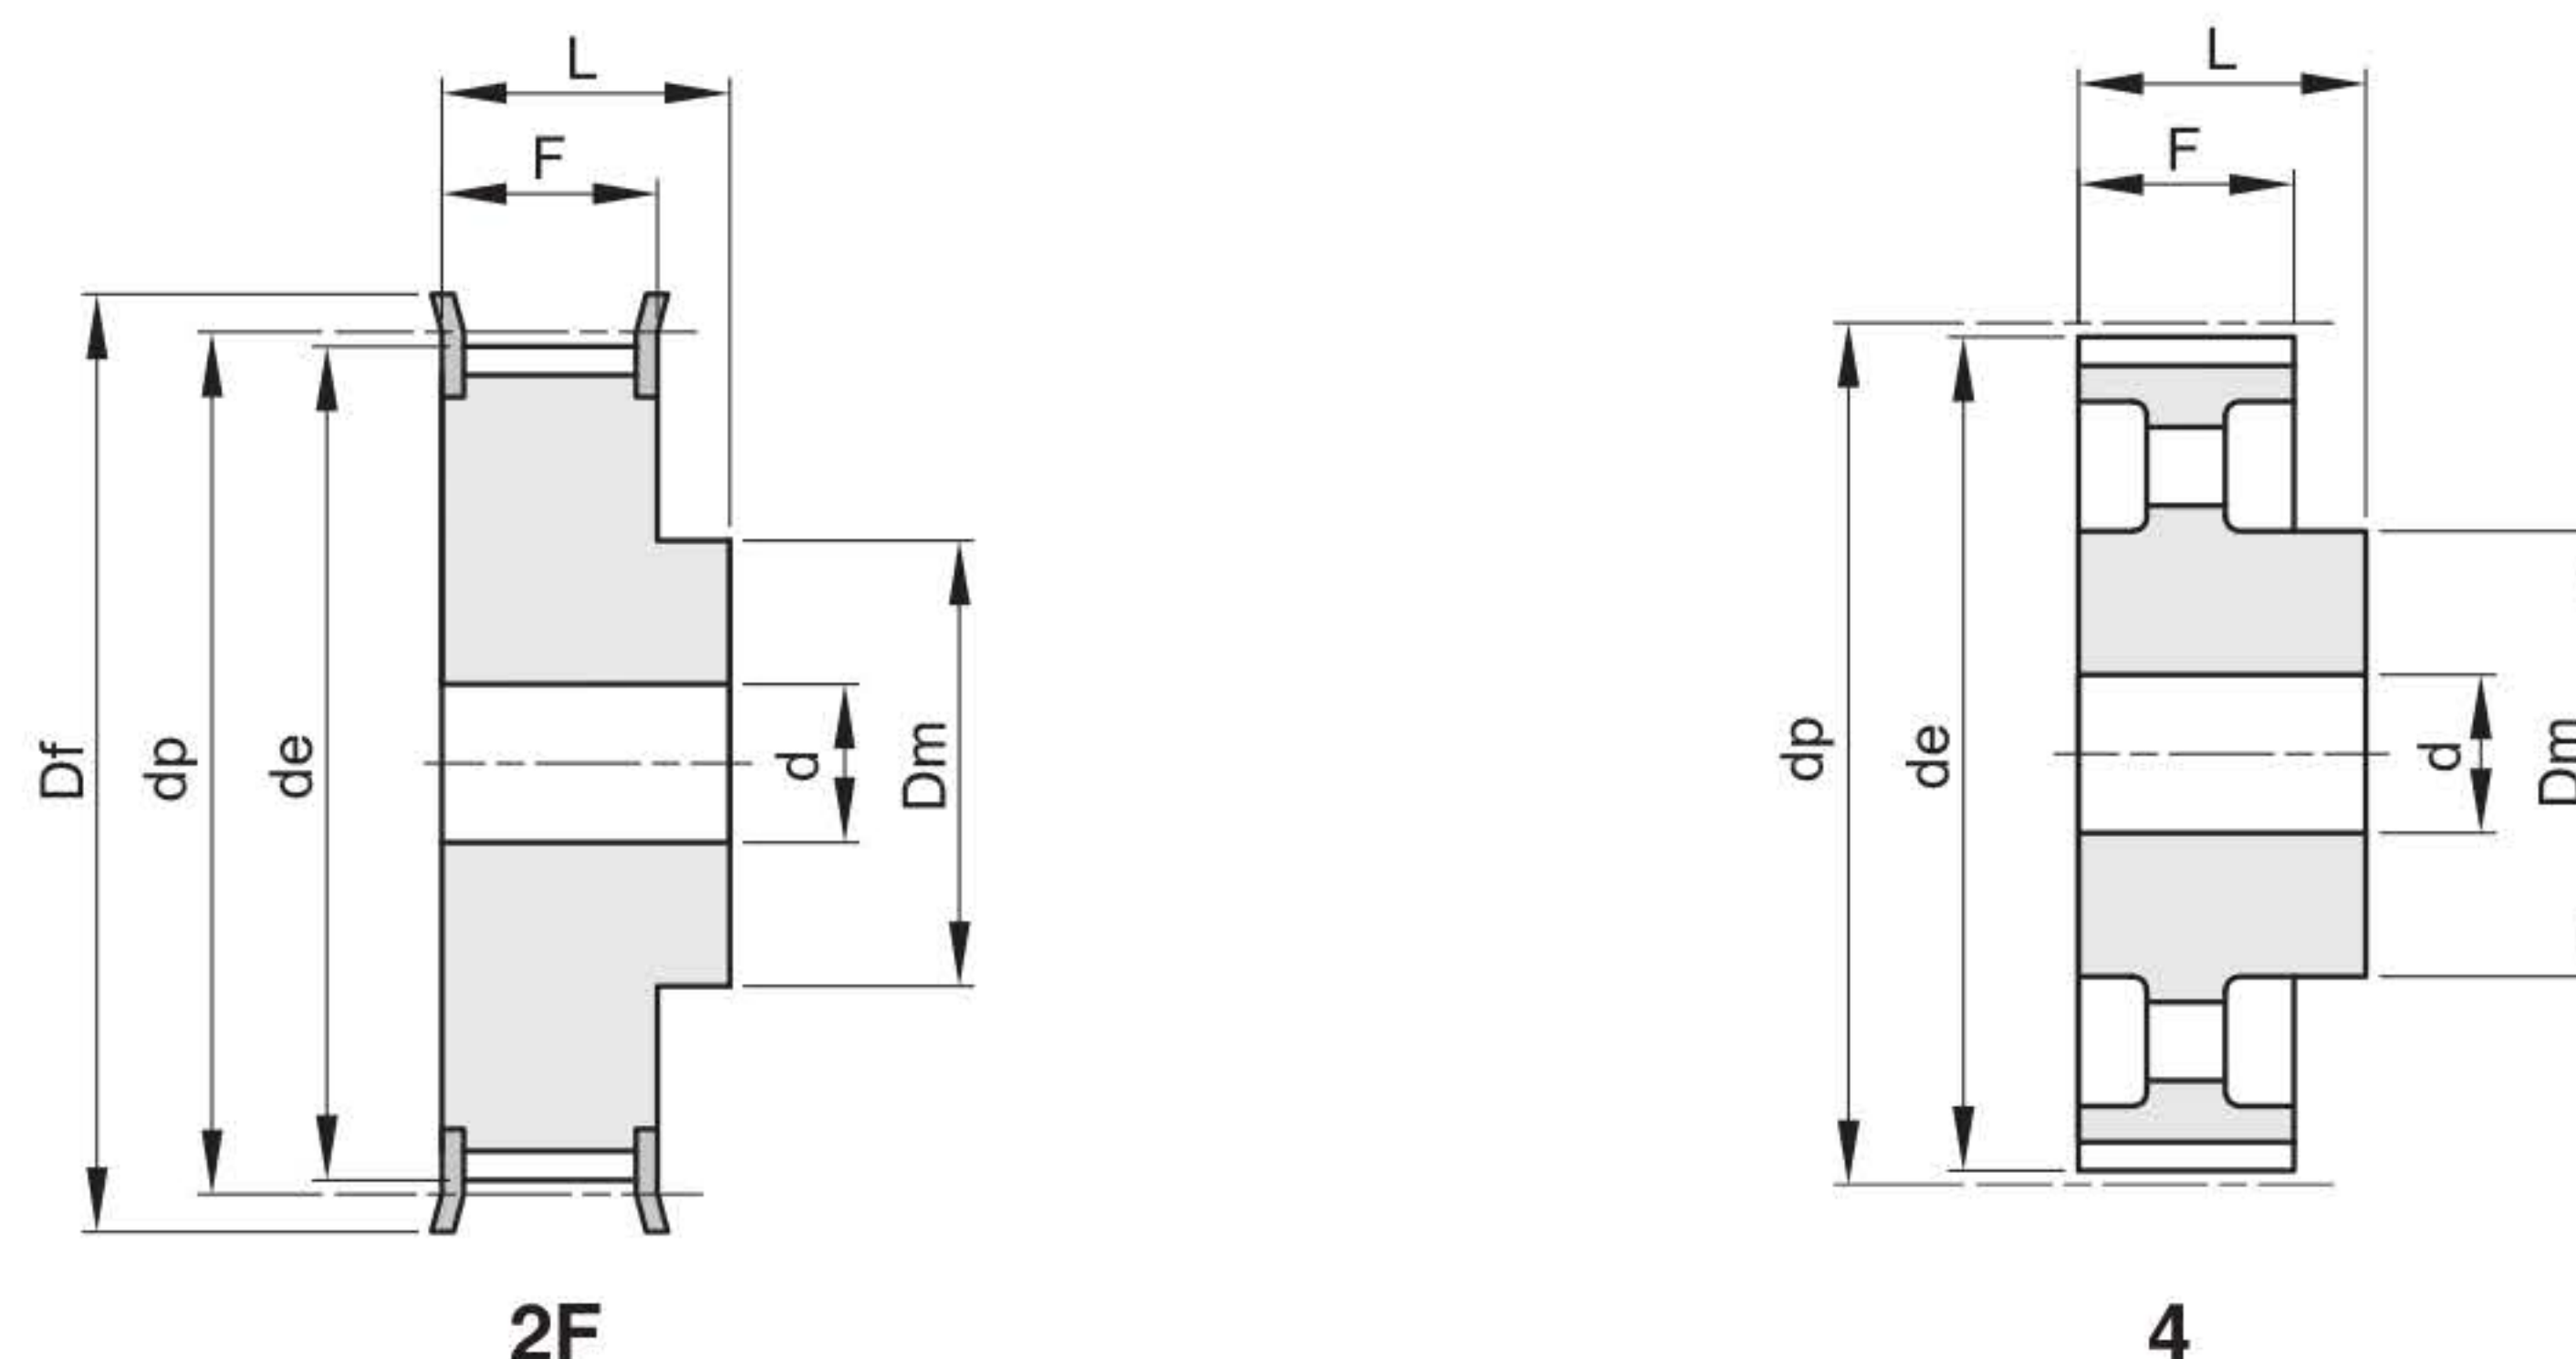


codice	tipo	materiale	denti	dp	de	Df	Dm	F	L	d	n° flangia	Kg.
10 L 050	2F	St	10	30,32	29,56	36	20	19,0	28	8	300	0,11
11 L 050	2F	St	11	33,35	32,59	38	24	19,0	30	8	301	0,14
12 L 050	2F	St	12	36,38	35,62	42	24	19,0	30	8	302	0,17
13 L 050	2F	St	13	39,41	38,65	44	28	19,0	30	8	303	0,21
14 L 050	2F	St	14	42,44	41,68	48	28	19,0	30	8	304	0,24
15 L 050	2F	St	15	45,48	44,72	51	34	19,0	30	8	305	0,29
16 L 050	2F	St	16	48,51	47,75	54	36	19,0	32	8	306	0,33
17 L 050	2F	St	17	51,54	50,78	57	36	19,0	32	10	307	0,38
18 L 050	2F	St	18	54,57	53,81	60	40	19,0	32	10	308	0,44
19 L 050	2F	St	19	57,61	56,84	63	40	19,0	32	10	309	0,47
20 L 050	2F	St	20	60,64	59,88	66	40	19,0	32	10	310	0,51
21 L 050	2F	St	21	63,67	62,91	71	45	19,0	32	10	311	0,60
22 L 050	2F	St	22	66,70	65,94	75	45	19,0	32	10	312	0,64
23 L 050	2F	St	23	69,73	68,97	79	55	19,0	32	10	313	0,78
24 L 050	2F	St	24	72,77	72,00	79	55	19,0	32	10	313	0,81
25 L 050	2F	St	25	75,80	75,04	83	58	19,0	32	10	314	0,89
26 L 050	2F	St	26	78,83	78,07	87	58	19,0	32	12	315	0,94
27 L 050	2F	St	27	81,86	81,10	87	58	19,0	32	12	315	0,99
28 L 050	2F	St	28	84,89	84,13	91	58	19,0	32	12	316	1,04
30 L 050	2F	St	30	90,96	90,20	97	70	19,0	32	12	318	1,17
32 L 050	2F	St	32	97,03	96,26	103	70	19,0	32	12	320	1,41
33 L 050	2F	St	33	100,05	99,29	106	70	19,0	32	12	321	1,49
34 L 050	2F	St	34	103,08	102,32	111	70	19,0	32	12	322	1,57
35 L 050	2F	St	35	106,12	105,35	111	70	19,0	32	12	322	1,62
36 L 050	2F	St	36	109,15	108,39	115	70	19,0	32	12	323	1,70
40 L 050	2F	St	40	121,29	120,51	127	70	19,0	32	12	327	2,03
42 L 050	2F	St	42	127,34	126,58	135	70	19,0	32	12	328	2,21
44 L 050	2F	St	44	133,40	132,64	140	70	19,0	32	12	330	2,38
45 L 050	2F	St	45	136,44	135,67	143	70	19,0	32	12	331	2,48
48 L 050	2F	St	48	145,53	144,77	152	70	19,0	32	12	334	2,78
50 L 050	4	GG	50	151,60	150,83		70	19,0	32	14		1,74
52 L 050	4	GG	52	157,66	156,90		70	19,0	32	14		1,80
56 L 050	4	GG	56	169,79	169,02		70	19,0	32	14		1,87
57 L 050	4	GG	57	172,82	172,06		70	19,0	32	14		1,88
60 L 050	4	GG	60	181,91	181,15		75	19,0	42	14		2,41
72 L 050	4	GG	72	218,29	217,53		75	19,0	42	14		2,82
84 L 050	4	GG	84	254,68	253,92		75	19,0	42	14		3,08
96 L 050	4	GG	96	291,06	290,30		75	19,0	42	14		3,42

L 075

Passo 3/8" (9,525 mm)

Per cinghie larghezza 3/4" (19,05 mm)

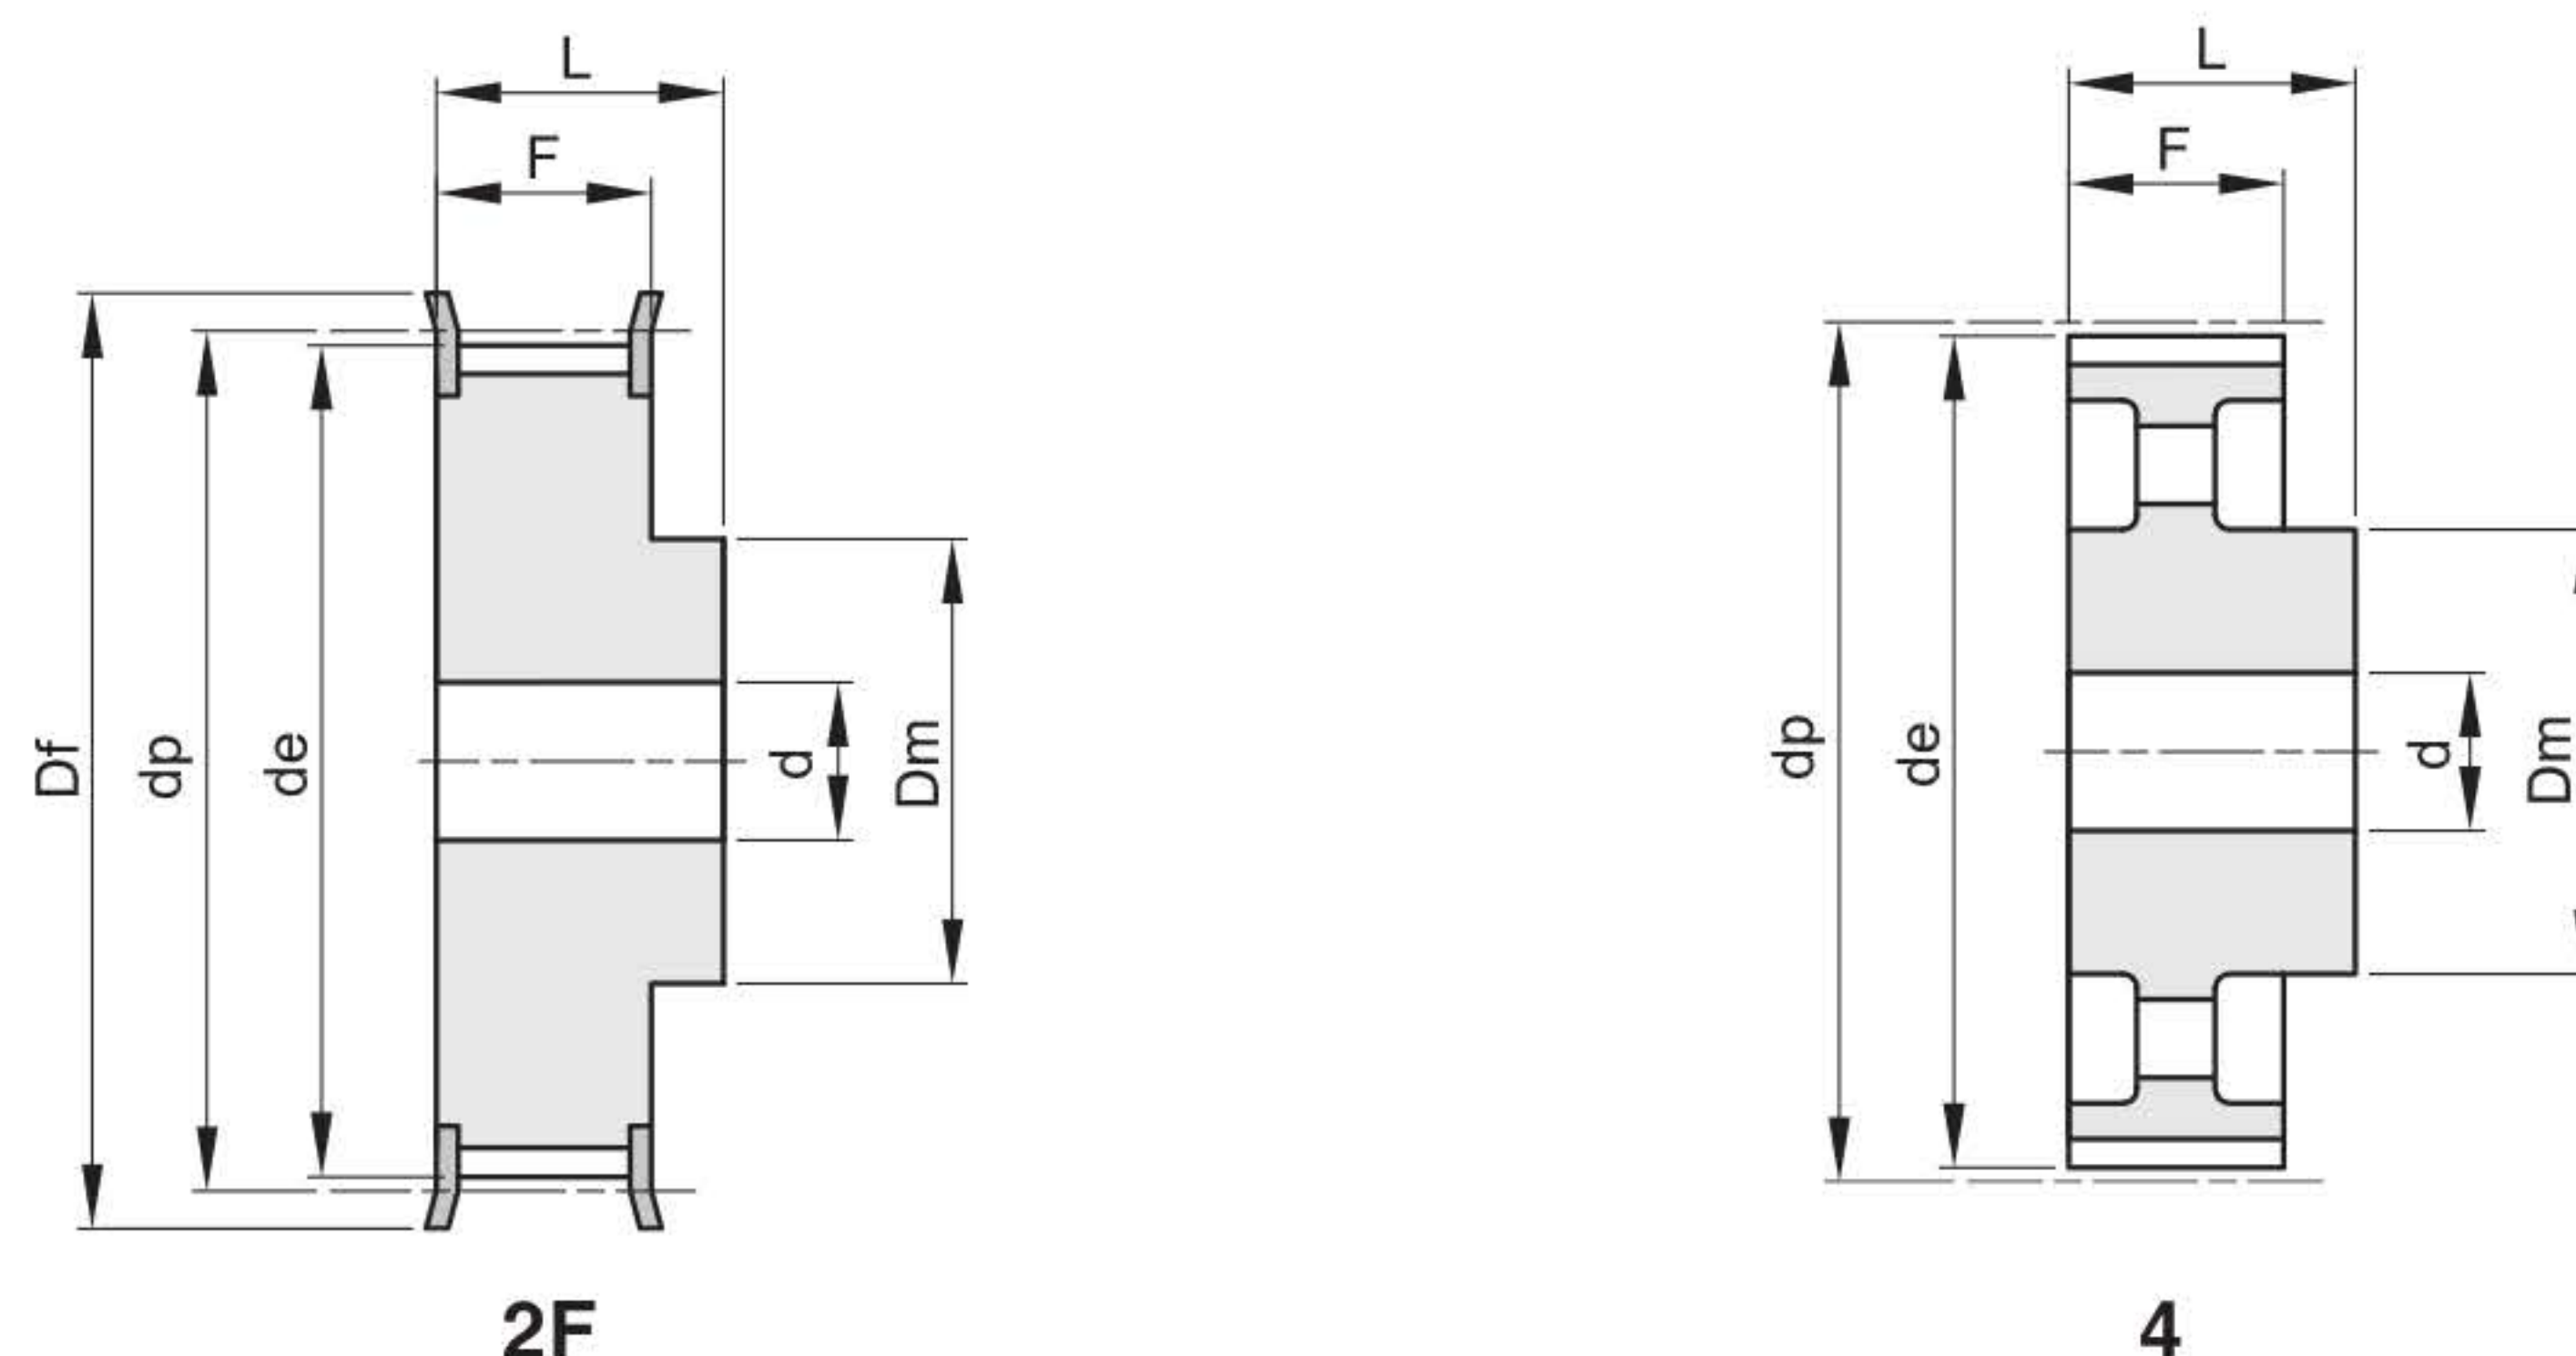


codice	tipo	materiale	denti	dp	de	Df	Dm	F	L	d	n° flangia	Kg.
10 L 075	2F	St	10	30,32	29,56	36	20	25,4	38	8	300	0,14
11 L 075	2F	St	11	33,35	32,59	38	24	25,4	38	8	301	0,18
12 L 075	2F	St	12	36,38	35,62	42	24	25,4	38	8	302	0,22
13 L 075	2F	St	13	39,41	38,65	44	28	25,4	38	8	303	0,26
14 L 075	2F	St	14	42,44	41,68	48	28	25,4	38	8	304	0,30
15 L 075	2F	St	15	45,48	44,72	51	34	25,4	38	8	305	0,37
16 L 075	2F	St	16	48,51	47,75	54	36	25,4	38	8	306	0,43
17 L 075	2F	St	17	51,54	50,78	57	36	25,4	38	10	307	0,46
18 L 075	2F	St	18	54,57	53,81	60	40	25,4	38	10	308	0,54
19 L 075	2F	St	19	57,61	56,84	63	40	25,4	38	10	309	0,58
20 L 075	2F	St	20	60,64	59,88	66	40	25,4	38	10	310	0,64
21 L 075	2F	St	21	63,67	62,91	71	45	25,4	38	10	311	0,71
22 L 075	2F	St	22	66,70	65,94	75	45	25,4	38	10	312	0,79
23 L 075	2F	St	23	69,73	68,97	79	55	25,4	38	10	313	0,94
24 L 075	2F	St	24	72,77	72,00	79	55	25,4	38	10	313	1,00
25 L 075	2F	St	25	75,80	75,04	83	58	25,4	38	10	314	1,10
26 L 075	2F	St	26	78,83	78,07	87	58	25,4	38	12	315	1,16
27 L 075	2F	St	27	81,86	81,10	87	58	25,4	38	12	315	1,22
28 L 075	2F	St	28	84,89	84,13	91	58	25,4	38	12	316	1,30
30 L 075	2F	St	30	90,96	90,20	97	70	25,4	38	12	318	1,47
32 L 075	2F	St	32	97,03	96,26	103	70	25,4	38	12	320	1,75
33 L 075	2F	St	33	100,05	99,29	106	70	25,4	38	12	321	1,85
34 L 075	2F	St	34	103,08	102,32	111	70	25,4	38	12	322	1,93
35 L 075	2F	St	35	106,12	105,35	111	70	25,4	38	12	322	2,03
36 L 075	2F	St	36	109,15	108,39	115	70	25,4	38	12	323	2,14
40 L 075	2F	St	40	121,29	120,51	127	70	25,4	38	12	327	2,56
42 L 075	2F	St	42	127,34	126,58	135	70	25,4	38	12	328	2,81
44 L 075	2F	St	44	133,40	132,64	140	70	25,4	38	12	330	3,02
45 L 075	2F	St	45	136,44	135,67	143	70	25,4	38	12	331	3,16
48 L 075	2F	St	48	145,53	144,77	152	70	25,4	38	12	334	3,57
50 L 075	4	GG	50	151,60	150,83		70	25,4	38	14		2,10
52 L 075	4	GG	52	157,66	156,90		70	25,4	38	14		2,13
56 L 075	4	GG	56	169,79	169,02		70	25,4	38	14		2,27
57 L 075	4	GG	57	172,82	172,06		70	25,4	38	14		2,28
60 L 075	4	GG	60	181,91	181,15		75	25,4	45	14		2,70
72 L 075	4	GG	72	218,29	217,53		75	25,4	45	14		3,19
84 L 075	4	GG	84	254,68	253,92		75	25,4	45	14		3,64
96 L 075	4	GG	96	291,06	290,30		75	25,4	45	14		4,04

L 100

Passo 3/8" (9,525 mm)

Per cinghie larghezza 1" (25,4 mm)

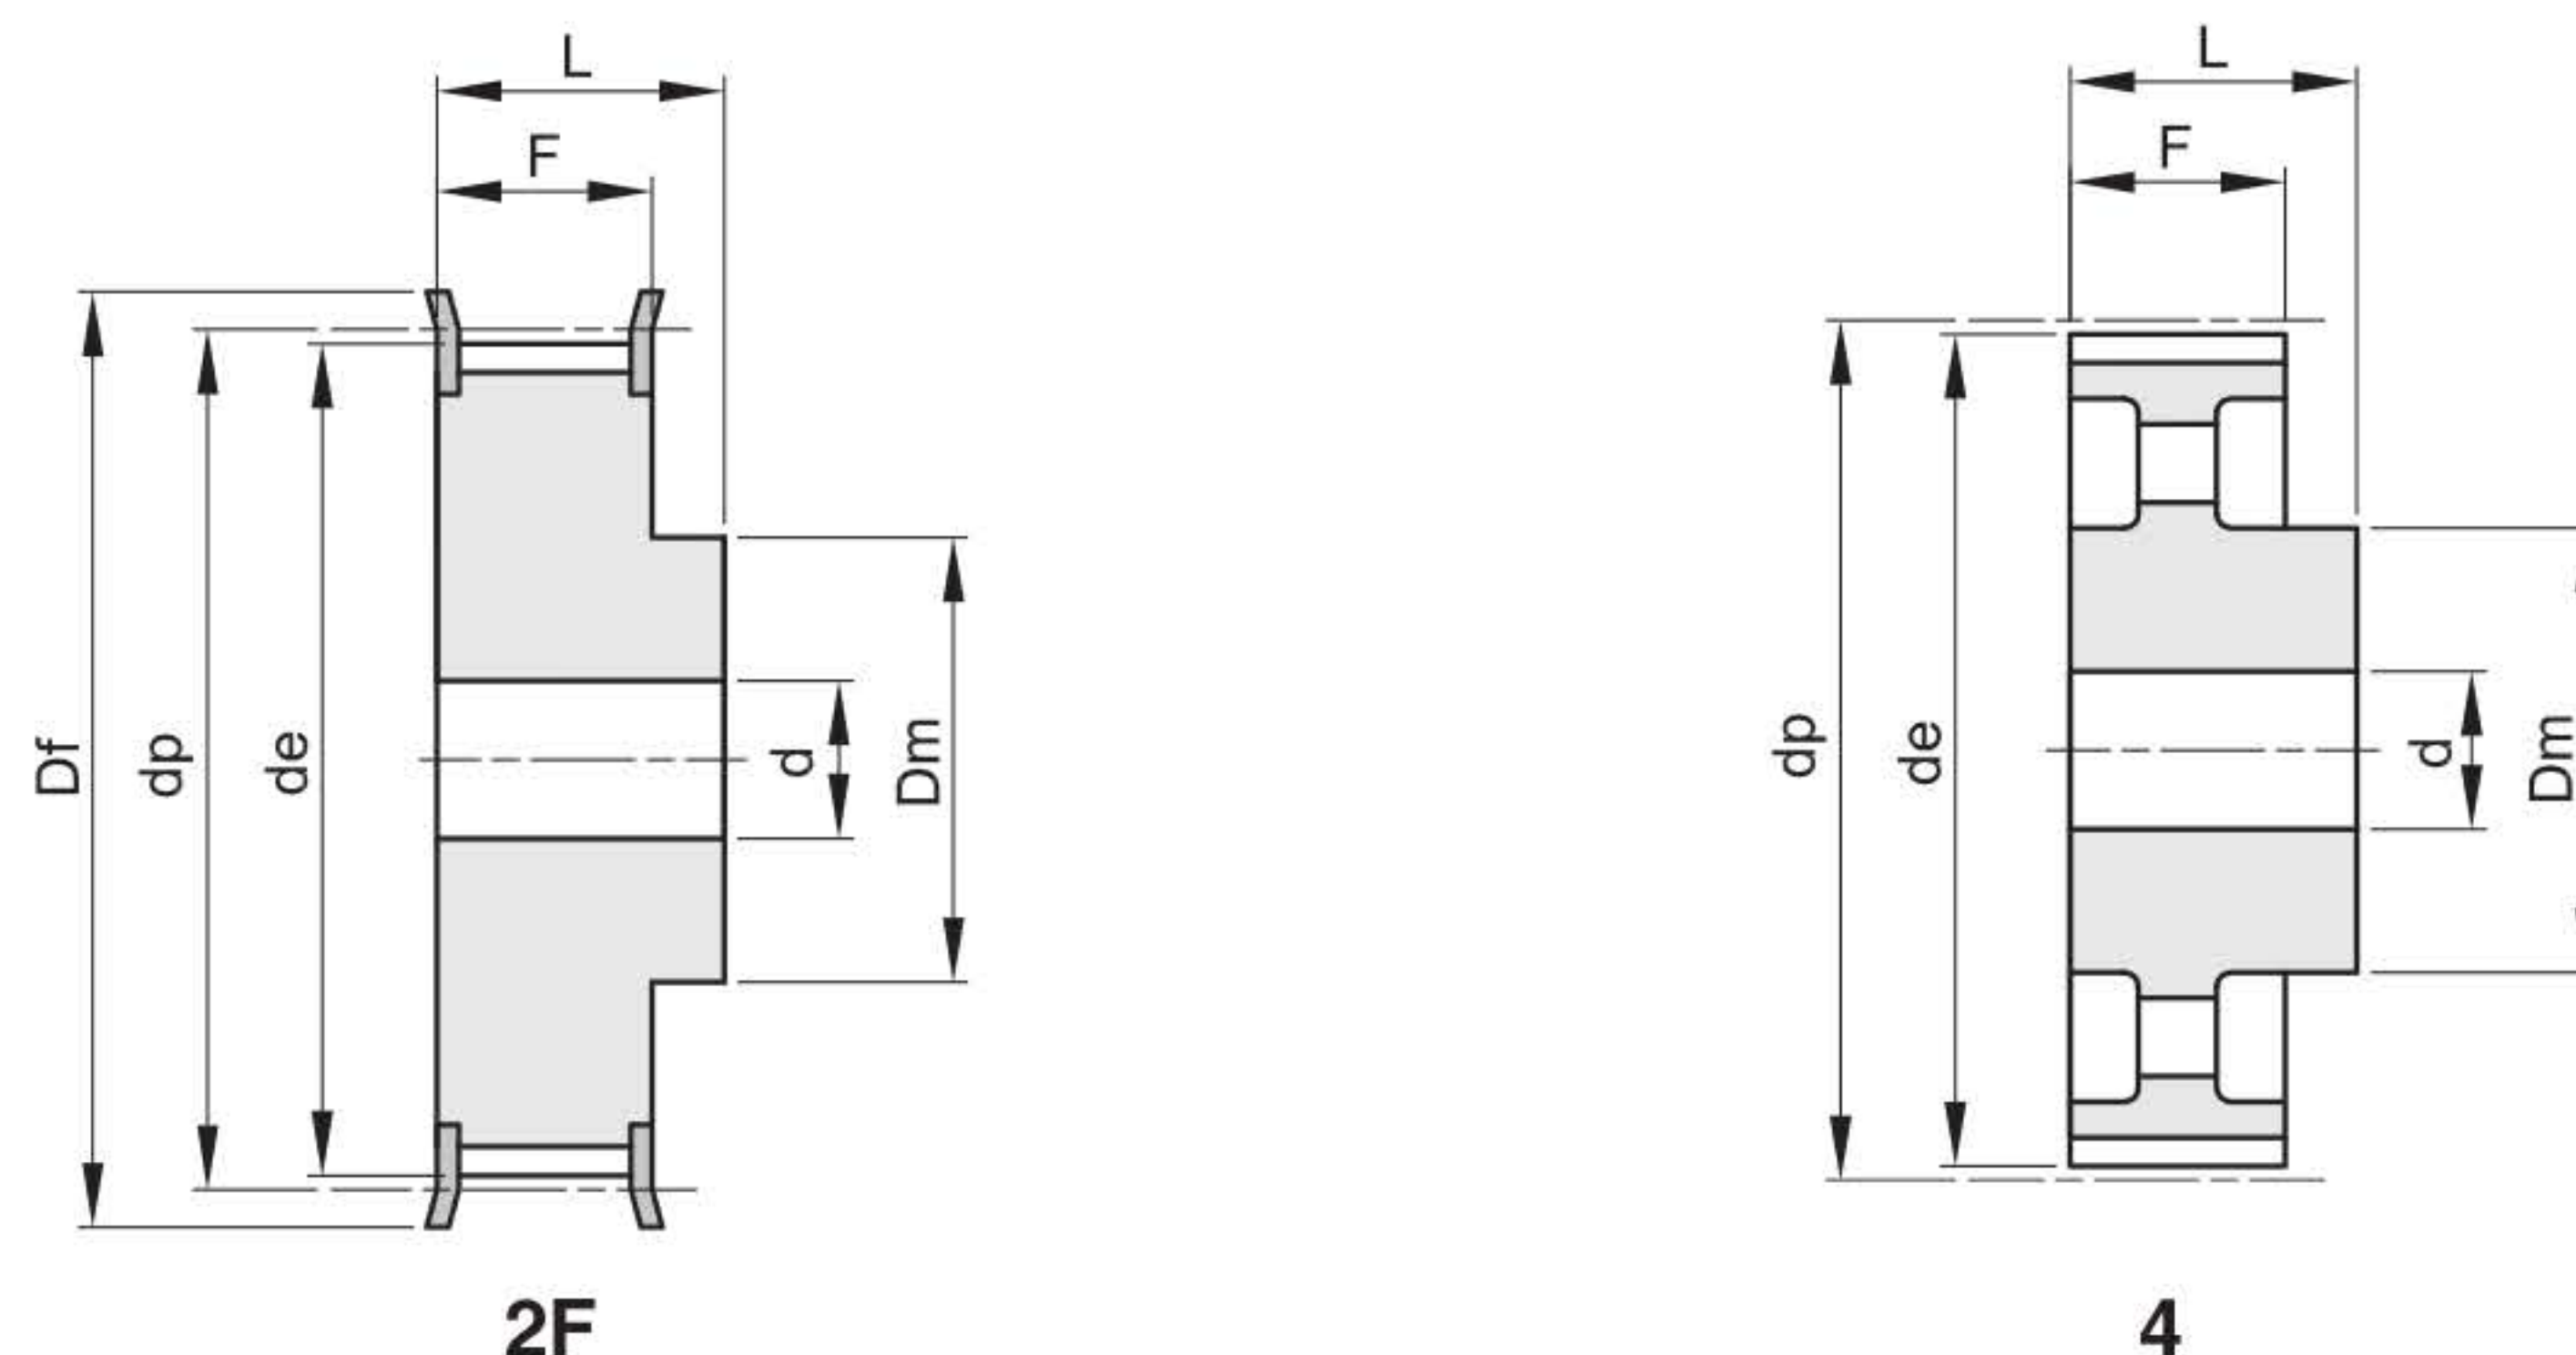


codice	tipo	materiale	denti	dp	de	Df	Dm	F	L	d	n° flangia	Kg.
10 L 100	2F	St	10	30,32	29,56	36	20	31,8	45	8	300	0,17
11 L 100	2F	St	11	33,35	32,59	38	24	31,8	45	8	301	0,22
12 L 100	2F	St	12	36,38	35,62	42	24	31,8	45	8	302	0,26
13 L 100	2F	St	13	39,41	38,65	44	28	31,8	45	8	303	0,32
14 L 100	2F	St	14	42,44	41,68	48	28	31,8	45	10	304	0,35
15 L 100	2F	St	15	45,48	44,72	51	34	31,8	45	10	305	0,43
16 L 100	2F	St	16	48,51	47,75	54	36	31,8	45	10	306	0,50
17 L 100	2F	St	17	51,54	50,78	57	36	31,8	45	10	307	0,56
18 L 100	2F	St	18	54,57	53,81	60	40	31,8	45	10	308	0,64
19 L 100	2F	St	19	57,61	56,84	63	40	31,8	45	10	309	0,70
20 L 100	2F	St	20	60,64	59,88	66	40	31,8	45	10	310	0,77
21 L 100	2F	St	21	63,67	62,91	71	45	31,8	45	10	311	0,88
22 L 100	2F	St	22	66,70	65,94	75	45	31,8	45	12	312	0,95
23 L 100	2F	St	23	69,73	68,97	79	55	31,8	45	12	313	1,11
24 L 100	2F	St	24	72,77	72,00	79	55	31,8	45	12	313	1,18
25 L 100	2F	St	25	75,80	75,04	83	58	31,8	45	12	314	1,30
26 L 100	2F	St	26	78,83	78,07	87	58	31,8	45	12	315	1,40
27 L 100	2F	St	27	81,86	81,10	87	58	31,8	45	12	315	1,47
28 L 100	2F	St	28	84,89	84,13	91	58	31,8	45	12	316	1,58
30 L 100	2F	St	30	90,96	90,20	97	70	31,8	45	12	318	1,78
32 L 100	2F	St	32	97,03	96,26	103	70	31,8	45	12	320	2,11
33 L 100	2F	St	33	100,05	99,29	106	70	31,8	45	12	321	2,23
34 L 100	2F	St	34	103,08	102,32	111	70	31,8	45	12	322	2,39
35 L 100	2F	St	35	106,12	105,35	111	70	31,8	45	12	322	2,45
36 L 100	2F	St	36	109,15	108,39	115	70	31,8	45	12	323	2,59
40 L 100	2F	St	40	121,29	120,51	127	70	31,8	45	12	327	3,13
42 L 100	2F	St	42	127,34	126,58	135	70	31,8	45	12	328	3,43
44 L 100	2F	St	44	133,40	132,64	140	70	31,8	45	12	330	3,72
45 L 100	2F	St	45	136,44	135,67	143	70	31,8	45	12	331	3,89
48 L 100	2F	St	48	145,53	144,77	152	70	31,8	45	12	334	4,38
50 L 100	4	GG	50	151,60	150,83		70	31,8	45	14		2,41
52 L 100	4	GG	52	157,66	156,90		70	31,8	45	14		2,55
56 L 100	4	GG	56	169,79	169,02		70	31,8	45	14		2,65
57 L 100	4	GG	57	172,82	172,06		70	31,8	45	14		2,71
60 L 100	4	GG	60	181,91	181,15		75	31,8	45	14		3,11
72 L 100	4	GG	72	218,29	217,53		75	31,8	45	14		3,65
84 L 100	4	GG	84	254,68	253,92		75	31,8	45	14		4,12
96 L 100	4	GG	96	291,06	290,30		75	31,8	45	14		4,60

H 075

Passo 1/2" (12,7 mm)

Per cinghie larghezza 3/4" (19,05 mm)

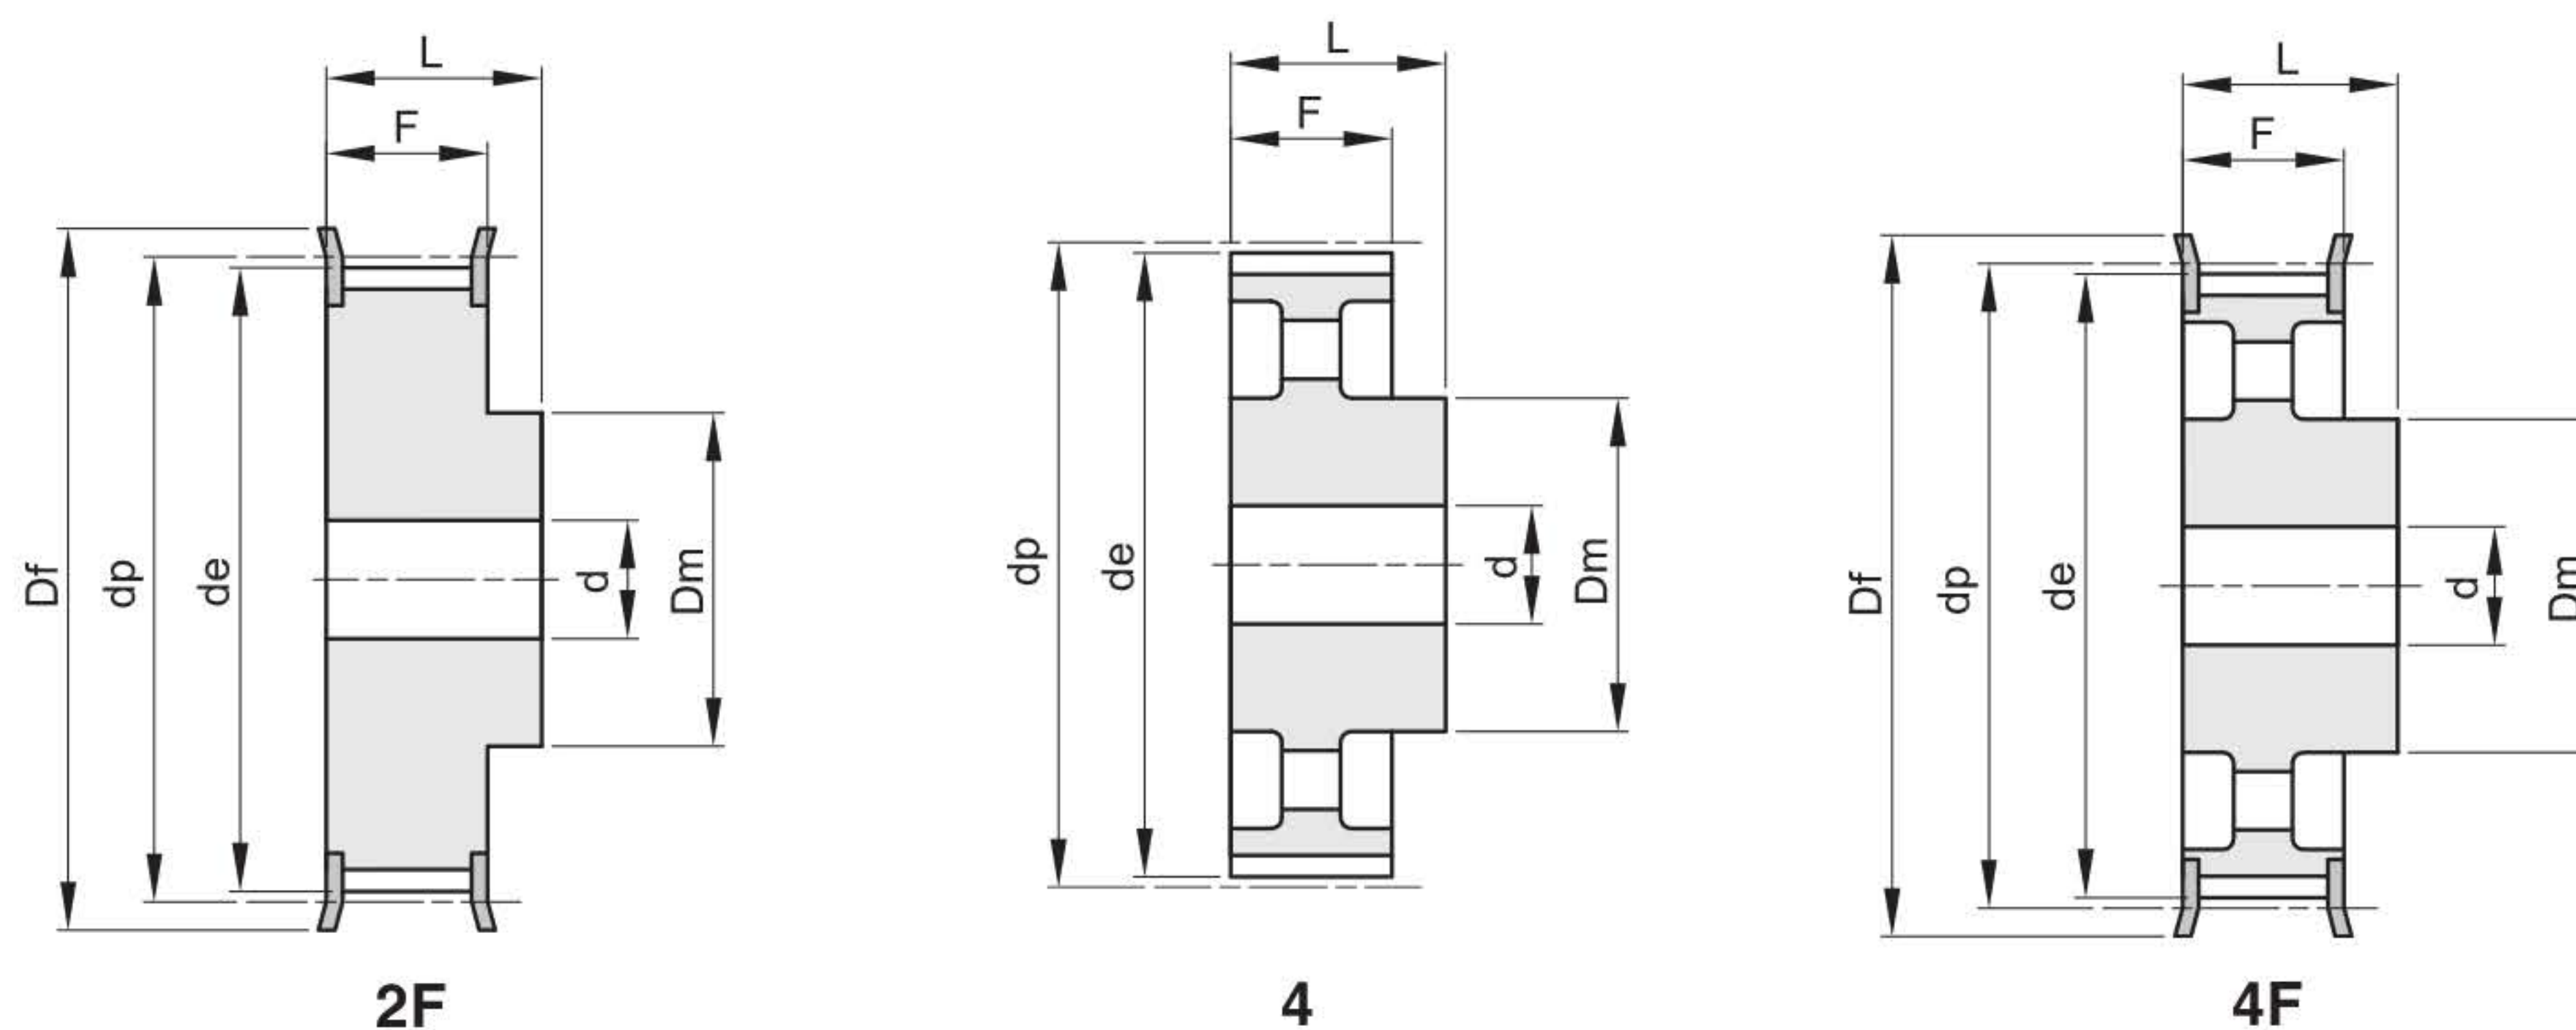


codice	tipo	materiale	denti	dp	de	Df	Dm	F	L	d	n° flangia	Kg.
14 H 075	2F	St	14	56,59	55,22	63	40	26,4	40	10	309	0,58
15 H 075	2F	St	15	60,64	59,27	66	45	26,4	40	10	310	0,69
16 H 075	2F	St	16	64,68	63,31	71	45	26,4	40	10	311	0,77
17 H 075	2F	St	17	68,72	67,35	75	45	26,4	40	12	312	0,84
18 H 075	2F	St	18	72,77	71,39	79	55	26,4	40	12	313	1,01
19 H 075	2F	St	19	76,81	75,44	83	60	26,4	40	12	314	1,15
20 H 075	2F	St	20	80,85	79,48	87	62	26,4	40	12	315	1,27
21 H 075	2F	St	21	84,89	83,52	91	65	26,4	40	12	316	1,41
22 H 075	2F	St	22	88,94	87,56	93	68	26,4	40	12	317	1,55
23 H 075	2F	St	23	92,98	91,61	97	72	26,4	40	12	318	1,71
24 H 075	2F	St	24	97,03	95,65	103	72	26,4	40	12	320	1,83
25 H 075	2F	St	25	101,06	99,69	106	72	26,4	40	12	321	1,96
26 H 075	2F	St	26	105,11	103,73	111	80	26,4	40	12	322	2,19
27 H 075	2F	St	27	109,15	107,78	115	80	26,4	40	12	323	2,32
28 H 075	2F	St	28	113,19	111,82	119	80	26,4	40	12	325	2,47
30 H 075	2F	St	30	121,29	119,90	127	80	26,4	40	14	327	2,76
32 H 075	2F	St	32	129,36	127,99	135	80	26,4	40	14	328	3,08
33 H 075	2F	St	33	133,40	132,03	140	80	26,4	40	14	330	3,25
34 H 075	2F	St	34	137,45	136,07	143	80	26,4	40	14	331	3,42
35 H 075	2F	St	35	141,49	140,12	148	80	26,4	40	14	333	3,61
36 H 075	2F	St	36	145,53	144,16	152	80	26,4	40	14	334	3,79
38 H 075	2F	St	38	153,62	152,24	158	80	26,4	40	14	335	4,16
40 H 075	2F	St	40	161,70	160,33	168	80	26,4	40	14	338	4,58
44 H 075	4F	GG	44	177,87	176,50	184	80	26,4	40	18	339	2,57
48 H 075	4F	GG	48	194,04	192,67	200	90	26,4	45	18	342	3,56
50 H 075	4	GG	50	202,13	200,75		90	26,4	45	18		3,74

H 100

Passo 1/2" (12,7 mm)

Per cinghie larghezza 1" (25,4 mm)

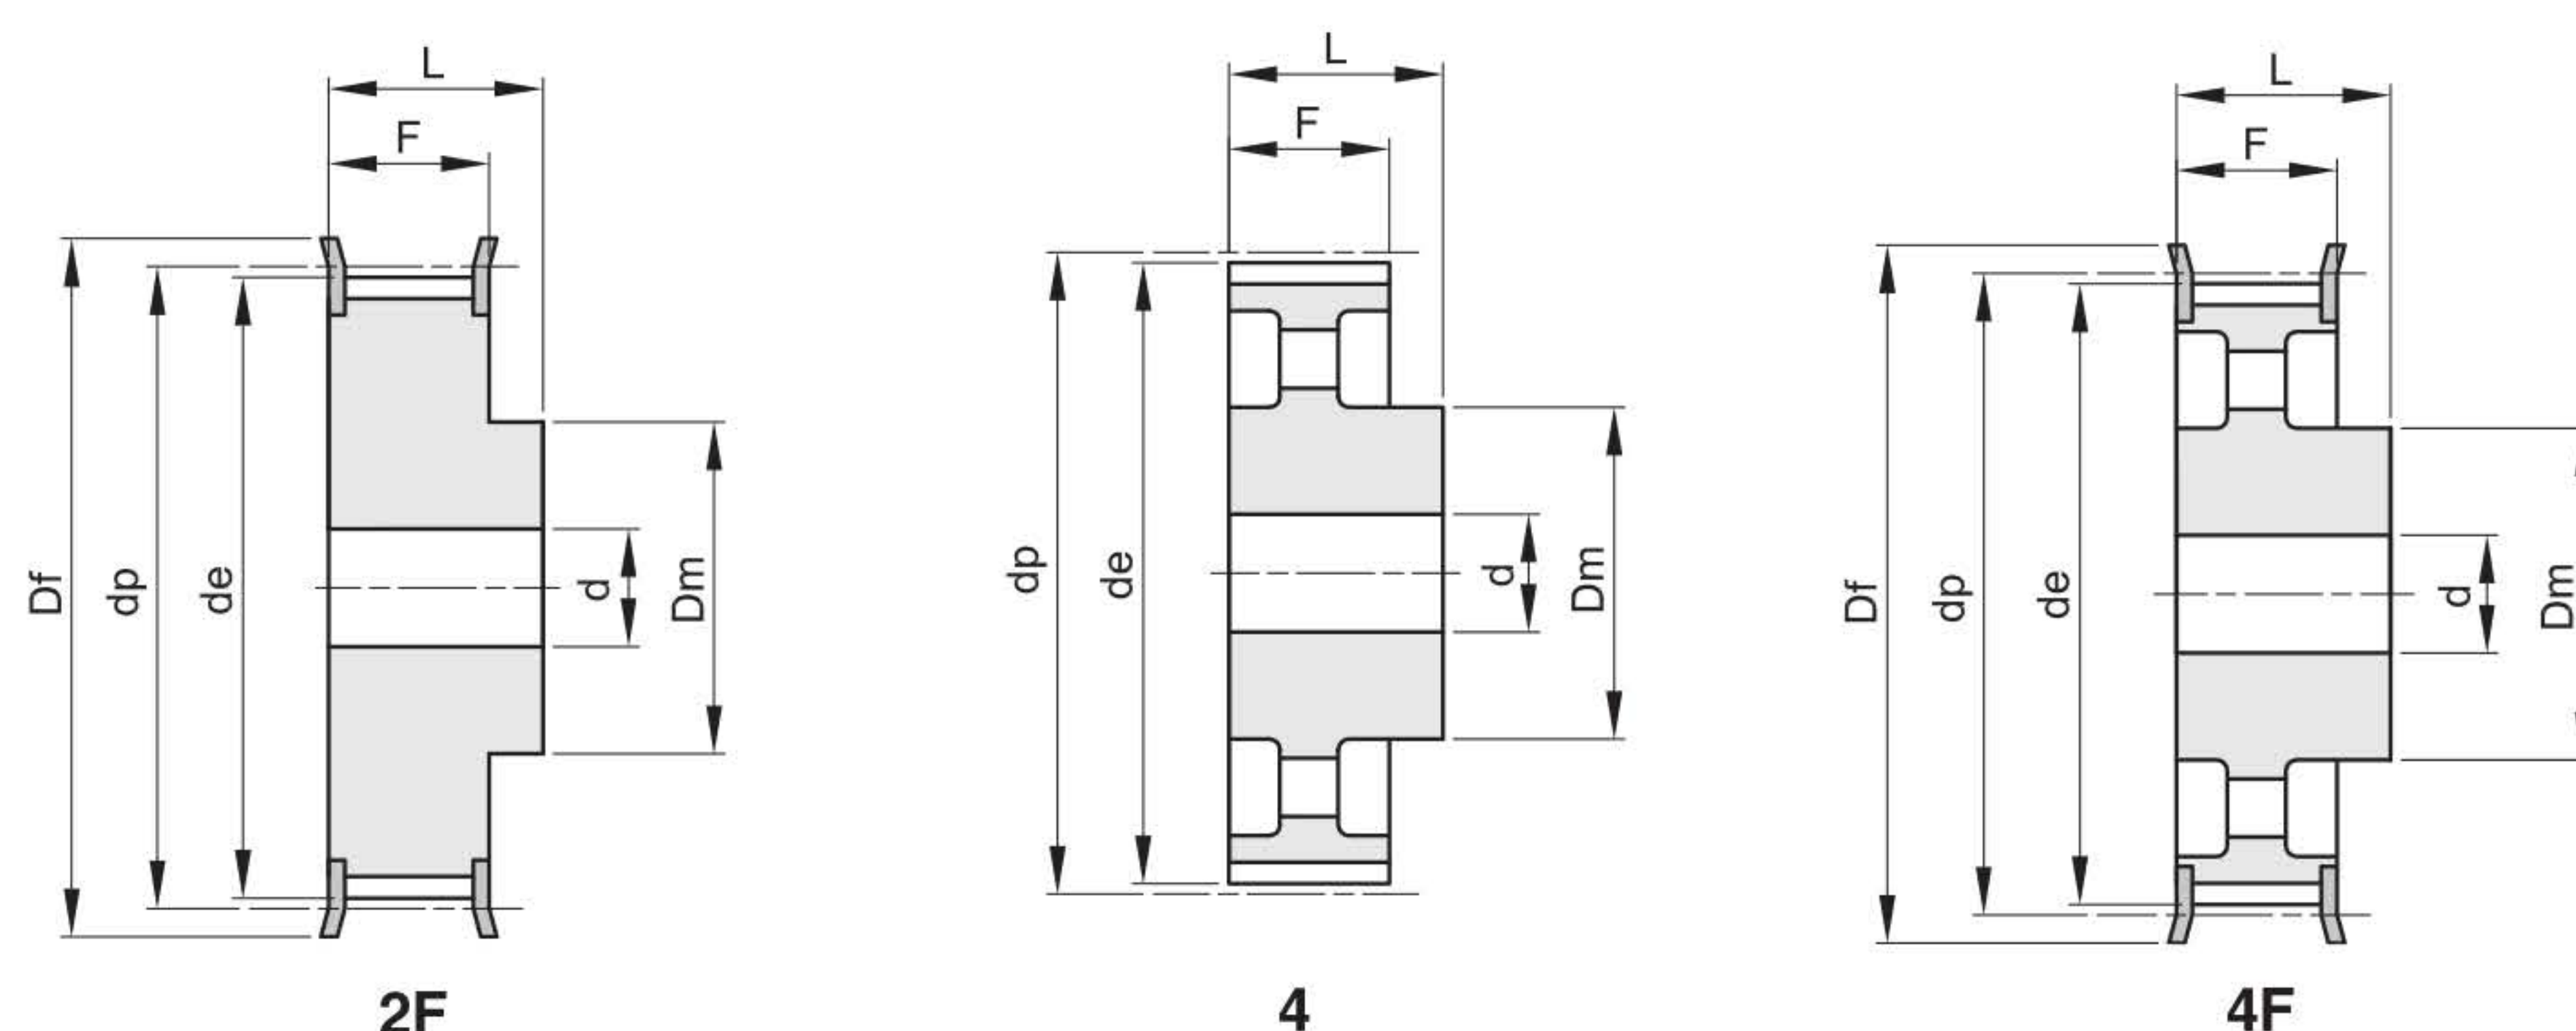


codice	tipo	materiale	denti	dp	de	Df	Dm	F	L	d	n° flangia	Kg.
14 H 100	2F	St	14	56,59	55,22	63	40	31,8	45	12	309	0,65
15 H 100	2F	St	15	60,64	59,27	66	45	31,8	45	12	310	0,77
16 H 100	2F	St	16	64,68	63,31	71	45	31,8	45	12	311	0,87
17 H 100	2F	St	17	68,72	67,35	75	45	31,8	45	12	312	0,97
18 H 100	2F	St	18	72,77	71,39	79	55	31,8	45	12	313	1,16
19 H 100	2F	St	19	76,81	75,44	83	60	31,8	45	14	314	1,30
20 H 100	2F	St	20	80,85	79,48	87	62	31,8	45	14	315	1,44
21 H 100	2F	St	21	84,89	83,52	91	65	31,8	45	14	316	1,60
22 H 100	2F	St	22	88,94	87,56	93	68	31,8	45	14	317	1,76
23 H 100	2F	St	23	92,98	91,61	97	72	31,8	45	14	318	1,94
24 H 100	2F	St	24	97,03	95,65	103	72	31,8	45	14	320	2,09
25 H 100	2F	St	25	101,06	99,69	106	72	31,8	45	14	321	2,24
26 H 100	2F	St	26	105,11	103,73	111	80	31,8	45	14	322	2,49
27 H 100	2F	St	27	109,15	107,78	115	80	31,8	45	14	323	2,66
28 H 100	2F	St	28	113,19	111,82	119	80	31,8	45	14	325	2,83
29 H 100	2F	St	29	117,23	115,86	123	80	31,8	45	14	326	3,01
30 H 100	2F	St	30	121,29	119,90	127	80	31,8	45	14	327	3,19
32 H 100	2F	St	32	129,36	127,99	135	80	31,8	45	14	328	3,57
33 H 100	2F	St	33	133,40	132,03	140	80	31,8	45	14	330	3,79
34 H 100	2F	St	34	137,45	136,07	143	80	31,8	45	14	331	3,99
35 H 100	2F	St	35	141,49	140,12	148	80	31,8	45	14	333	4,20
36 H 100	2F	St	36	145,53	144,16	152	80	31,8	45	14	334	4,44
38 H 100	2F	St	38	153,62	152,24	158	80	31,8	45	14	335	4,90
40 H 100	2F	St	40	161,70	160,33	168	80	31,8	45	14	338	5,39
44 H 100	4F	GG	44	177,87	176,50	184	80	31,8	50	18	339	3,37
45 H 100	4F	GG	45	181,91	180,54	192	80	31,8	50	18	340	3,57
48 H 100	4F	GG	48	194,04	192,67	200	90	31,8	50	18	342	4,10
50 H 100	4	GG	50	202,13	200,75		90	31,8	50	18		4,24
52 H 100	4	GG	52	210,21	208,84		90	31,8	50	18		4,32
58 H 100	4	GG	58	234,47	233,09		90	31,8	50	18		4,61
60 H 100	4	GG	60	242,55	241,18		100	31,8	50	18		5,30
70 H 100	4	GG	70	282,98	281,61		100	31,8	55	18		6,13
72 H 100	4	GG	72	291,06	289,69		120	31,8	55	18		7,47
84 H 100	4	GG	84	339,57	338,20		120	31,8	55	18		8,52
96 H 100	4	GG	96	388,08	386,71		120	31,8	60	18		10,25
120 H 100	4	GG	120	485,10	483,73		120	31,8	60	18		13,09

H 150

Passo 1/2" (12,7 mm)

Per cinghie larghezza 1" 1/2 (38,1 mm)

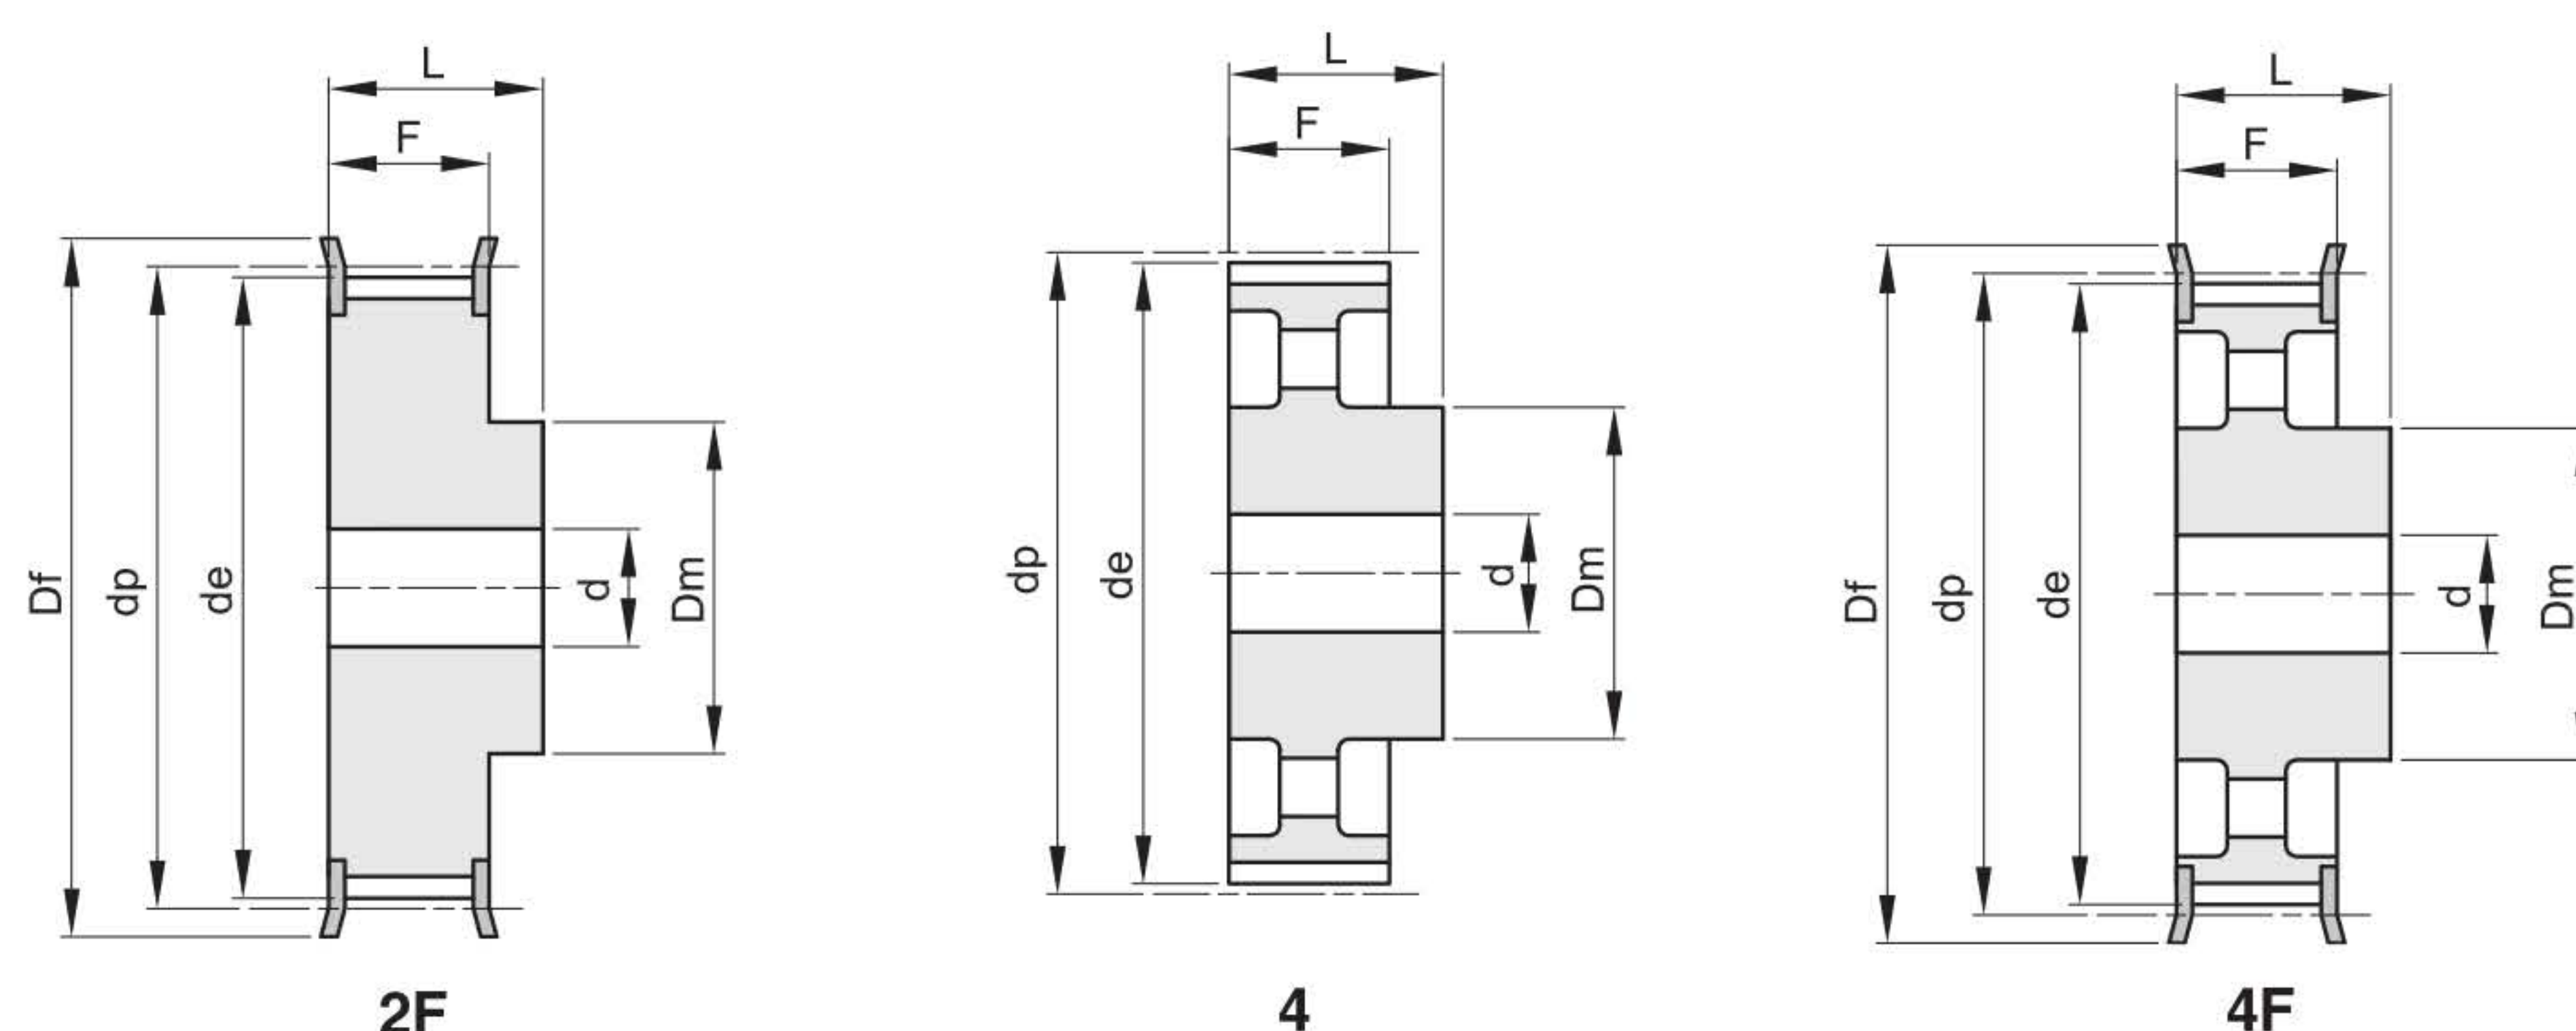


codice	tipo	materiale	denti	dp	de	Df	Dm	F	L	d	n° flangia	Kg.
14 H 150	2F	St	14	56,59	55,22	63	40	46,0	58	18	309	0,81
15 H 150	2F	St	15	60,64	59,27	66	45	46,0	58	18	310	0,97
16 H 150	2F	St	16	64,68	63,31	71	45	46,0	58	18	311	1,11
17 H 150	2F	St	17	68,72	67,35	75	45	46,0	58	18	312	1,25
18 H 150	2F	St	18	72,77	71,39	79	55	46,0	58	18	313	1,48
19 H 150	2F	St	19	76,81	75,44	83	60	46,0	58	18	314	1,68
20 H 150	2F	St	20	80,85	79,48	87	62	46,0	58	18	315	1,88
21 H 150	2F	St	21	84,89	83,52	91	65	46,0	58	18	316	2,08
22 H 150	2F	St	22	88,94	87,56	93	68	46,0	58	18	317	2,30
23 H 150	2F	St	23	92,98	91,61	97	72	46,0	58	18	318	2,54
24 H 150	2F	St	24	97,03	95,65	103	72	46,0	58	18	320	2,75
25 H 150	2F	St	25	101,06	99,69	106	72	46,0	58	18	321	2,97
26 H 150	2F	St	26	105,11	103,73	111	80	46,0	58	18	322	3,29
27 H 150	2F	St	27	109,15	107,78	115	80	46,0	58	18	323	3,52
28 H 150	2F	St	28	113,19	111,82	119	80	46,0	58	18	325	3,78
29 H 150	2F	St	29	117,23	115,86	123	80	46,0	58	18	326	4,03
30 H 150	2F	St	30	121,29	119,90	127	80	46,0	58	18	327	4,29
32 H 150	2F	St	32	129,36	127,99	135	80	46,0	58	18	328	4,86
33 H 150	2F	St	33	133,40	132,03	140	80	46,0	58	18	330	5,15
34 H 150	2F	St	34	137,45	136,07	143	80	46,0	58	18	331	5,46
35 H 150	2F	St	35	141,49	140,12	148	80	46,0	58	18	333	5,78
36 H 150	2F	St	36	145,53	144,16	152	80	46,0	58	18	334	6,09
38 H 150	2F	St	38	153,62	152,24	158	80	46,0	58	18	335	6,74
40 H 150	2F	St	40	161,70	160,33	168	80	46,0	58	18	338	7,46
44 H 150	4F	GG	44	177,87	176,50	184	80	46,0	58	18	339	4,29
45 H 150	4F	GG	45	181,91	180,54	192	80	46,0	58	18	340	4,44
48 H 150	4F	GG	48	194,04	192,67	200	90	46,0	65	18	342	5,41
50 H 150	4	GG	50	202,13	200,75		90	46,0	65	18		5,59
52 H 150	4	GG	52	210,21	208,84		90	46,0	65	18		5,79
58 H 150	4	GG	58	234,47	233,09		90	46,0	65	18		6,15
60 H 150	4	GG	60	242,55	241,18		100	46,0	65	18		7,08
70 H 150	4	GG	70	282,98	281,61		100	46,0	65	24		7,77
72 H 150	4	GG	72	291,06	289,69		120	46,0	65	24		9,70
84 H 150	4	GG	84	339,57	338,20		120	46,0	65	24		10,99
96 H 150	4	GG	96	388,08	386,71		120	46,0	65	24		12,24
120 H 150	4	GG	120	485,10	483,73		120	46,0	65	24		16,17

H 200

Passo 1/2" (12,7 mm)

Per cinghie larghezza 2" (50,8 mm)

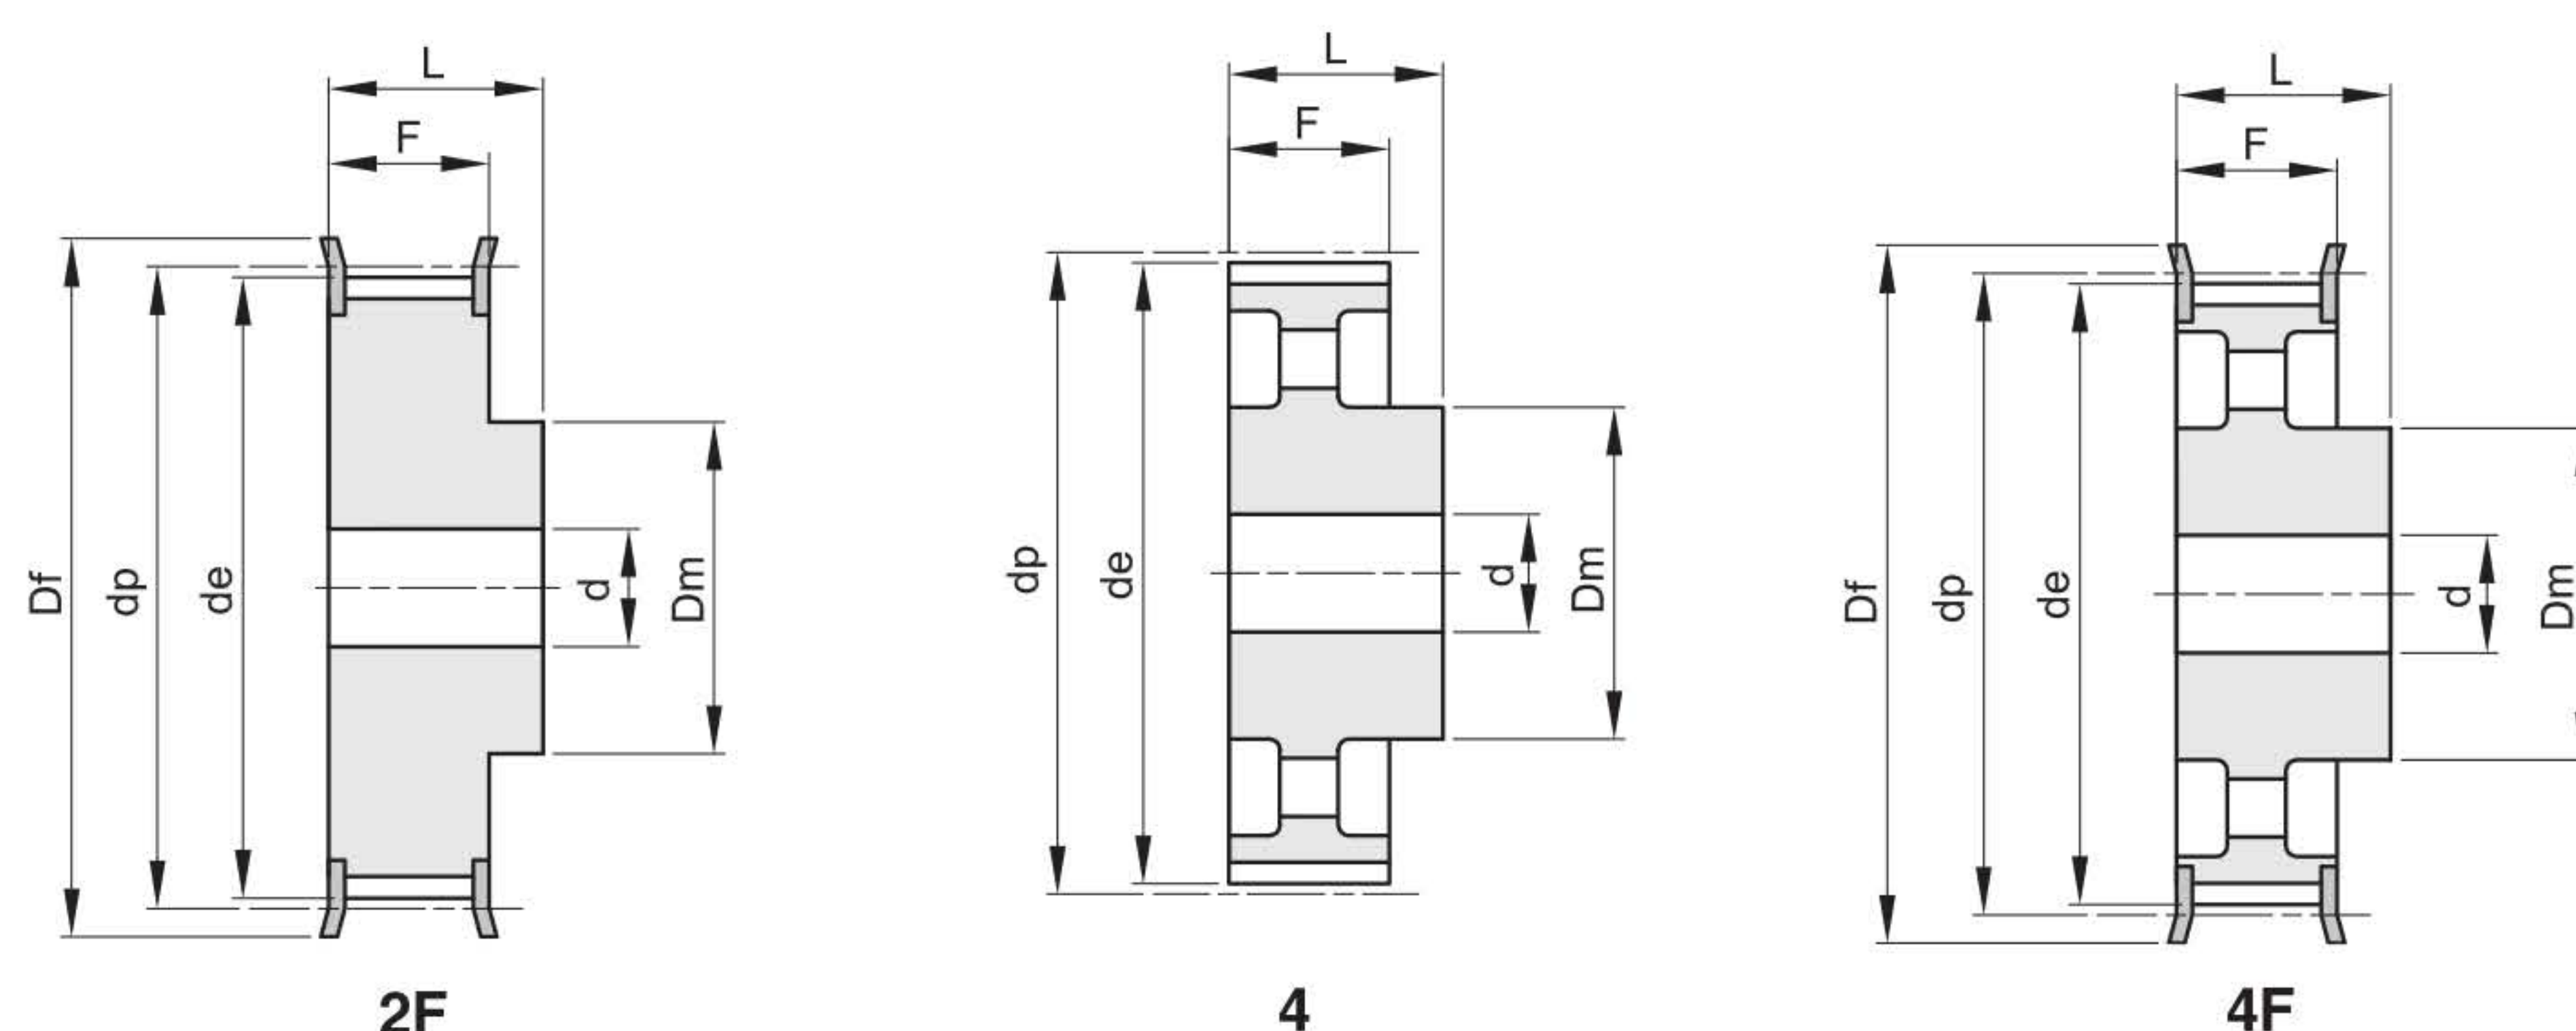


codice	tipo	materiale	denti	dp	de	Df	Dm	F	L	d	n° flangia	Kg.
14 H 200	2F	St	14	56,59	55,22	63	40	58,7	70	18	309	1,10
15 H 200	2F	St	15	60,64	59,27	66	45	58,7	70	18	310	1,33
16 H 200	2F	St	16	64,68	63,31	71	45	58,7	70	18	311	1,54
17 H 200	2F	St	17	68,72	67,35	75	45	58,7	70	18	312	1,69
18 H 200	2F	St	18	72,77	71,39	79	55	58,7	70	18	313	1,95
19 H 200	2F	St	19	76,81	75,44	83	60	58,7	70	18	314	2,20
20 H 200	2F	St	20	80,85	79,48	87	62	58,7	70	18	315	2,44
21 H 200	2F	St	21	84,89	83,52	91	65	58,7	70	18	316	2,70
22 H 200	2F	St	22	88,94	87,56	93	68	58,7	70	18	317	2,97
23 H 200	2F	St	23	92,98	91,61	97	72	58,7	70	18	318	3,25
24 H 200	2F	St	24	97,03	95,65	103	72	58,7	70	18	320	3,56
25 H 200	2F	St	25	101,06	99,69	106	72	58,7	70	18	321	3,81
26 H 200	2F	St	26	105,11	103,73	111	80	58,7	70	18	322	4,18
27 H 200	2F	St	27	109,15	107,78	115	80	58,7	70	18	323	4,49
28 H 200	2F	St	28	113,19	111,82	119	80	58,7	70	18	325	4,81
29 H 200	2F	St	29	117,23	115,86	123	80	58,7	70	18	326	5,14
30 H 200	2F	St	30	121,29	119,90	127	80	58,7	70	18	327	5,47
32 H 200	2F	St	32	129,36	127,99	135	80	58,7	70	18	328	6,17
33 H 200	2F	St	33	133,40	132,03	140	80	58,7	70	18	330	6,56
34 H 200	2F	St	34	137,45	136,07	143	80	58,7	70	18	331	6,94
35 H 200	2F	St	35	141,49	140,12	148	80	58,7	70	18	333	7,34
36 H 200	2F	St	36	145,53	144,16	152	80	58,7	70	18	334	7,75
38 H 200	2F	St	38	153,62	152,24	158	80	58,7	70	18	335	8,62
40 H 200	2F	St	40	161,70	160,33	168	80	58,7	70	18	338	9,50
44 H 200	4F	GG	44	177,87	176,50	184	80	58,7	70	18	339	5,14
45 H 200	4F	GG	45	181,91	180,54	192	80	58,7	70	18	340	5,38
48 H 200	4F	GG	48	194,04	192,67	200	90	58,7	75	24	342	6,29
50 H 200	4	GG	50	202,13	200,75		90	58,7	75	24		6,68
52 H 200	4	GG	52	210,21	208,84		90	58,7	75	24		6,81
58 H 200	4	GG	58	234,47	233,09		90	58,7	75	24		7,26
60 H 200	4	GG	60	242,55	241,18		100	58,7	75	24		8,25
70 H 200	4	GG	70	282,98	281,61		100	58,7	75	28		9,20
72 H 200	4	GG	72	291,06	289,69		120	58,7	75	28		11,09
84 H 200	4	GG	84	339,57	338,20		120	58,7	75	28		12,63
96 H 200	4	GG	96	388,08	386,71		120	58,7	75	28		14,51
120 H 200	4	GG	120	485,10	483,73		120	58,7	75	28		19,15

H 300

Passo 1/2" (12,7 mm)

Per cinghie larghezza 3" (76,2 mm)

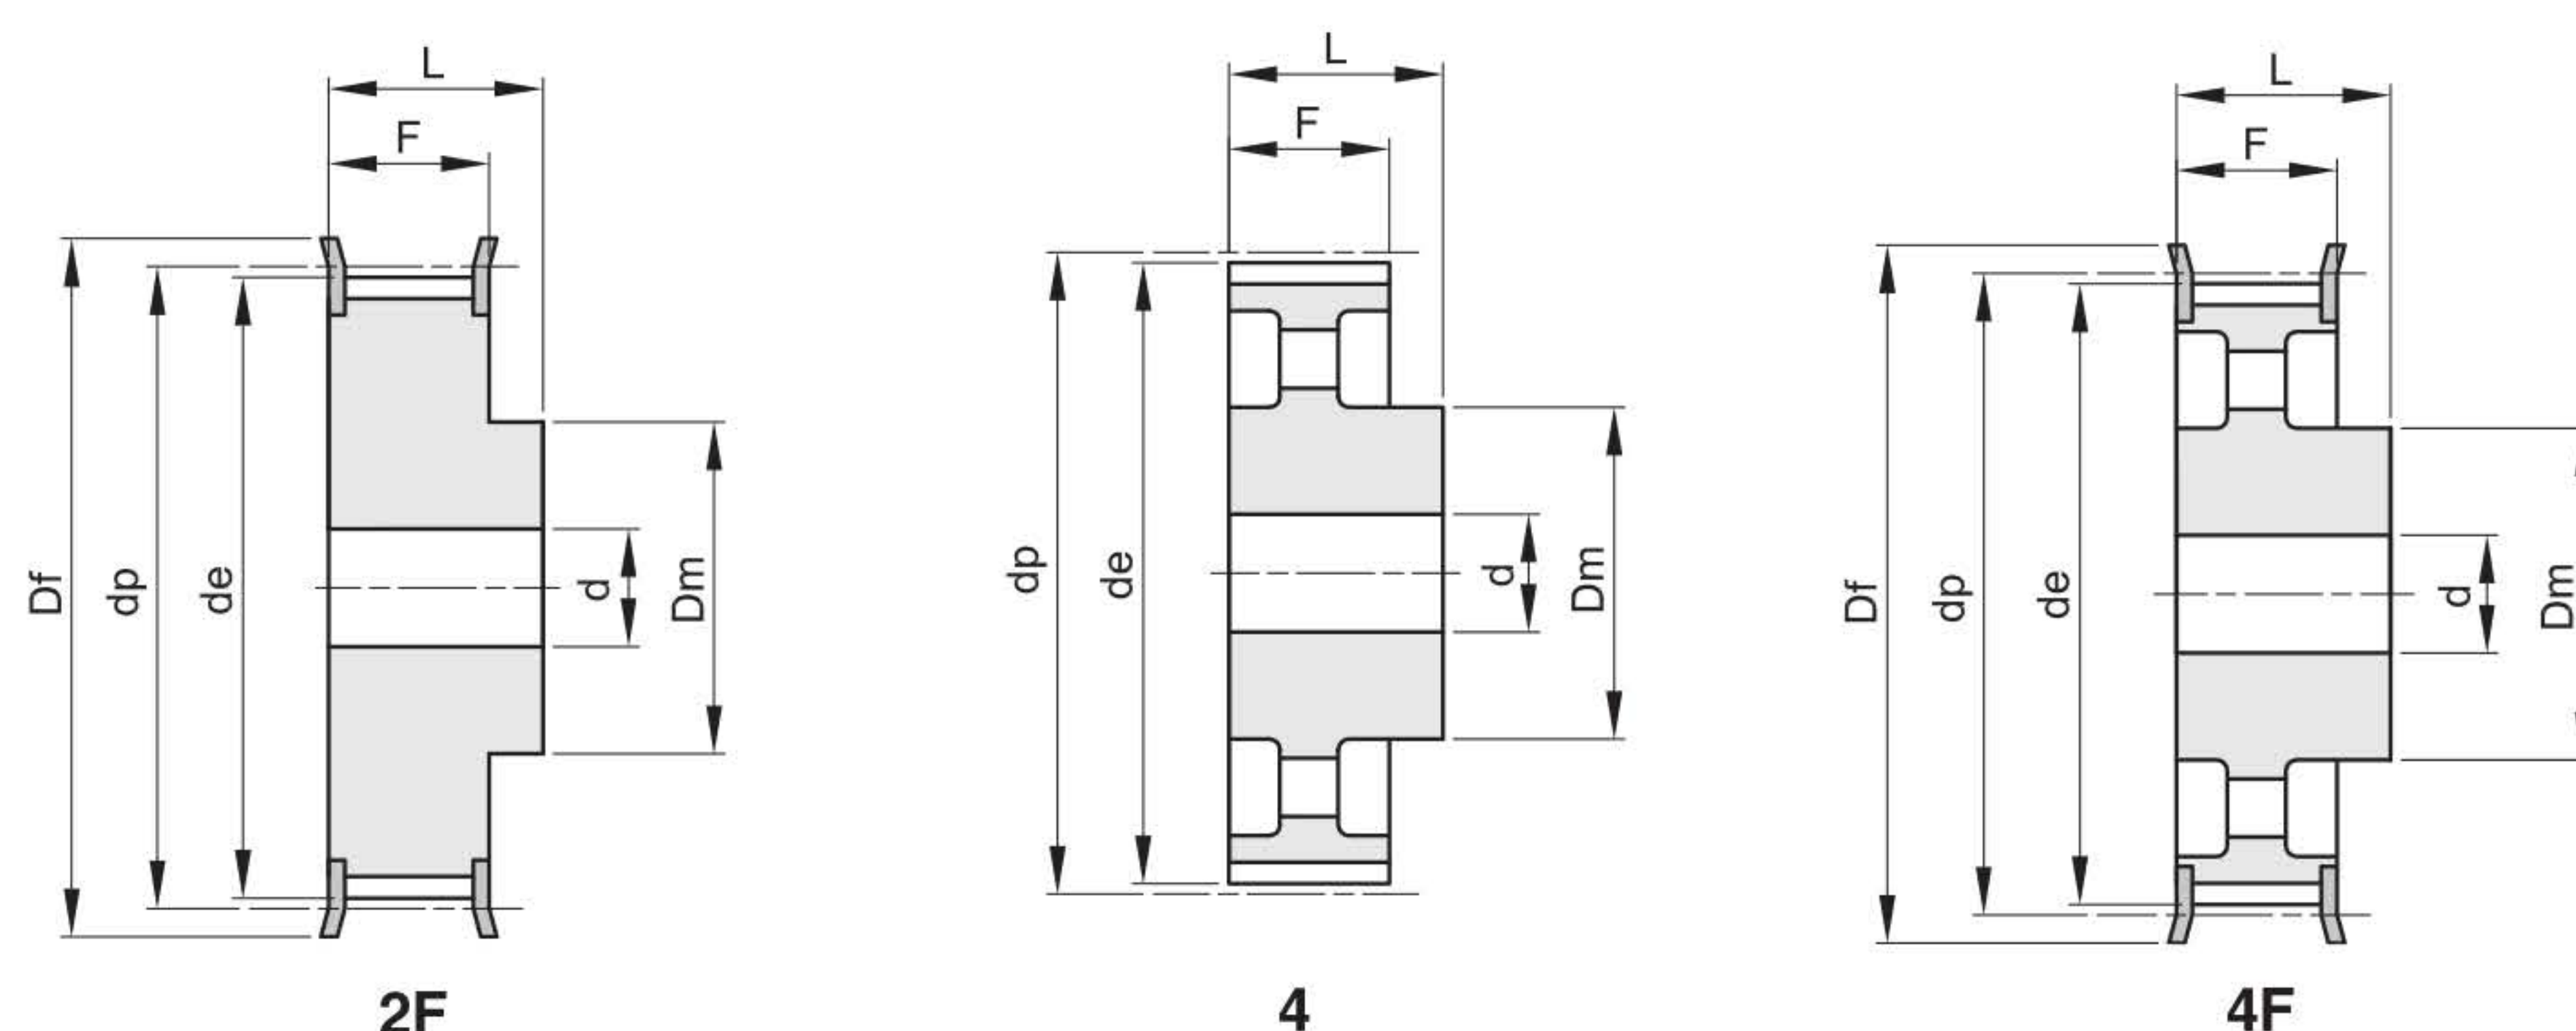


codice	tipo	materiale	denti	dp	de	Df	Dm	F	L	d	n° flangia	Kg.
14 H 300	2F	St	14	56,59	55,22	63	40	85,7	100	18	309	1,64
15 H 300	2F	St	15	60,64	59,27	66	45	85,7	100	18	310	1,91
16 H 300	2F	St	16	64,68	63,31	71	45	85,7	100	18	311	2,16
17 H 300	2F	St	17	68,72	67,35	75	45	85,7	100	18	312	2,43
18 H 300	2F	St	18	72,77	71,39	79	55	85,7	100	18	313	2,80
19 H 300	2F	St	19	76,81	75,44	83	60	85,7	100	18	314	3,16
20 H 300	2F	St	20	80,85	79,48	87	62	85,7	100	18	315	3,50
21 H 300	2F	St	21	84,89	83,52	91	65	85,7	100	18	316	3,87
22 H 300	2F	St	22	88,94	87,56	93	68	85,7	100	18	317	4,26
23 H 300	2F	St	23	92,98	91,61	97	72	85,7	100	18	318	4,68
24 H 300	2F	St	24	97,03	95,65	103	72	85,7	100	18	320	5,08
25 H 300	2F	St	25	101,06	99,69	106	72	85,7	100	18	321	5,45
26 H 300	2F	St	26	105,11	103,73	111	80	85,7	100	18	322	6,01
27 H 300	2F	St	27	109,15	107,78	115	80	85,7	100	18	323	6,45
28 H 300	2F	St	28	113,19	111,82	119	80	85,7	100	18	325	6,91
30 H 300	2F	St	30	121,29	119,90	127	80	85,7	100	18	327	7,90
32 H 300	2F	St	32	129,36	127,99	135	80	85,7	100	18	328	8,92
33 H 300	2F	St	33	133,40	132,03	140	80	85,7	100	18	330	9,46
34 H 300	2F	St	34	137,45	136,07	143	80	85,7	100	18	331	10,04
35 H 300	2F	St	35	141,49	140,12	148	80	85,7	100	18	333	10,62
36 H 300	2F	St	36	145,53	144,16	152	80	85,7	100	18	334	11,24
38 H 300	2F	St	38	153,62	152,24	158	80	85,7	100	18	335	12,44
40 H 300	2F	St	40	161,70	160,33	168	80	85,7	100	18	338	13,80
44 H 300	4F	GG	44	177,87	176,50	184	80	85,7	100	24	339	7,22
48 H 300	4F	GG	48	194,04	192,67	200	90	85,7	100	24	342	8,60
50 H 300	4	GG	50	202,13	200,75		90	85,7	100	24		8,99
58 H 300	4	GG	58	234,47	233,09		90	85,7	100	24		10,04
60 H 300	4	GG	60	242,55	241,18		100	85,7	100	24		11,18
72 H 300	4	GG	72	291,06	289,69		120	85,7	100	28		15,07
84 H 300	4	GG	84	339,57	338,20		120	85,7	100	28		16,97
96 H 300	4	GG	96	388,08	386,71		120	85,7	100	28		19,86
120 H 300	4	GG	120	485,10	483,73		120	85,7	100	28		25,91

XH 200

Passo 7/8" (22,22 mm)

Per cinghie larghezza 2" (50,8 mm)

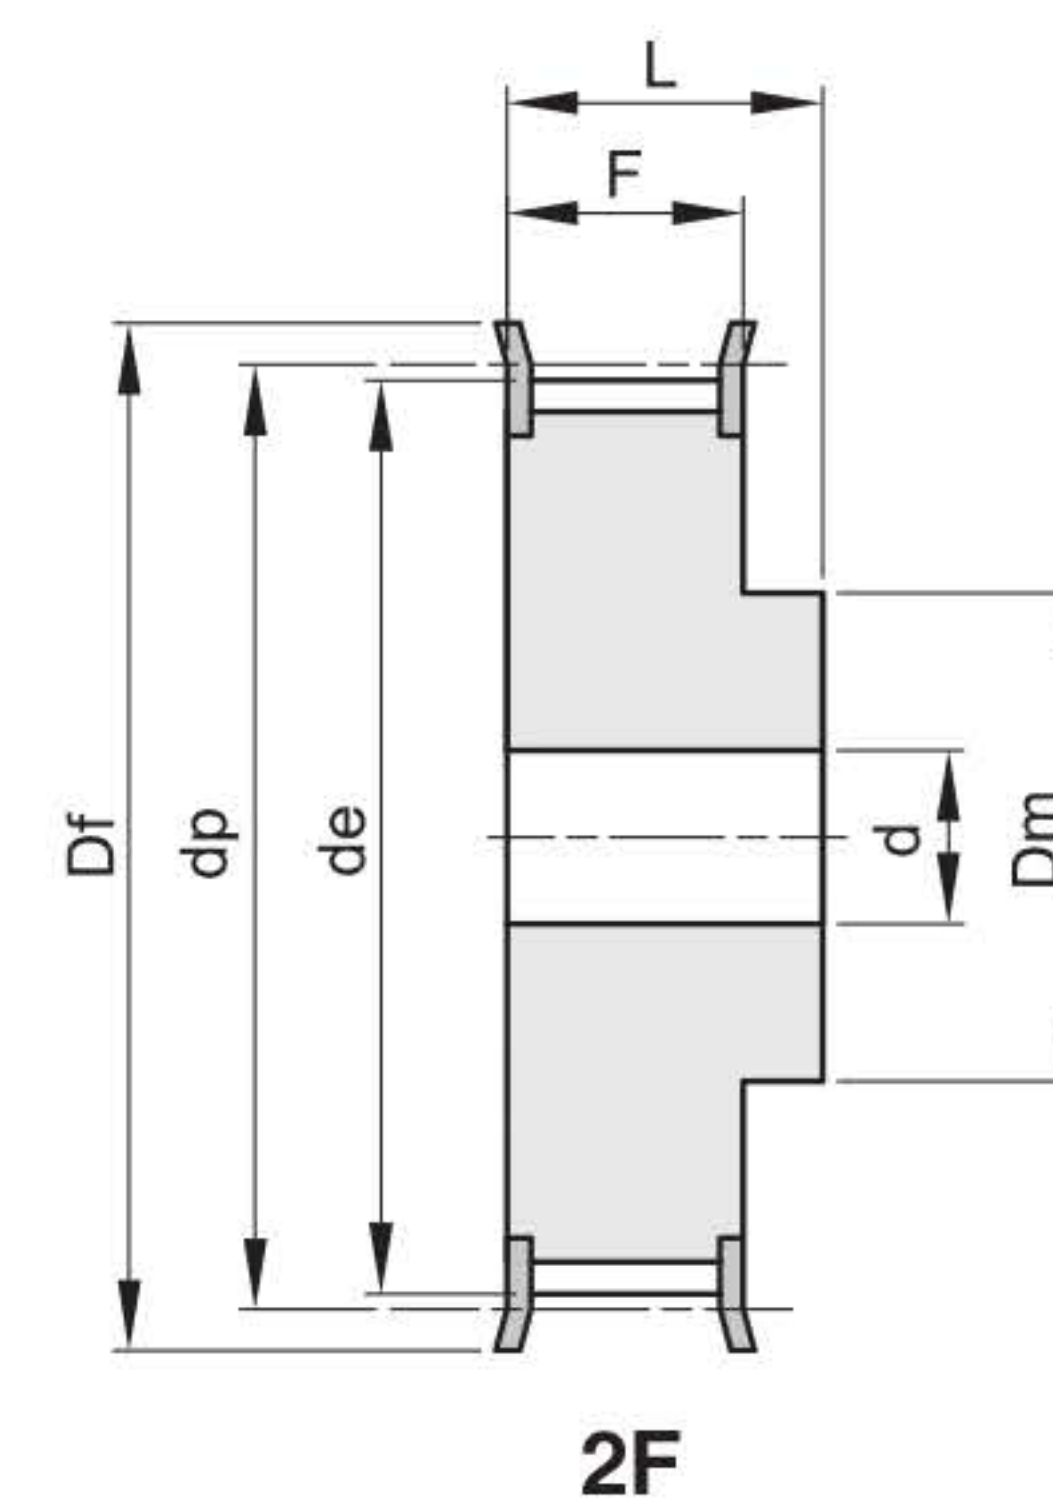


codice	tipo	materiale	denti	dp	de	Df	Dm	F	L	d	n° flangia	Kg.
18 XH 200	2F	St	18	127,34	124,55	138	100	65	80	24	401	6,00
19 XH 200	2F	St	19	134,41	131,62	146	100	65	80	24	402	6,60
20 XH 200	2F	St	20	141,49	138,69	154	100	65	80	24	403	7,30
21 XH 200	2F	St	21	148,56	145,77	160	110	65	80	24	404	8,73
22 XH 200	2F	St	22	155,64	152,84	168	110	65	80	24	405	9,55
24 XH 200	2F	St	24	169,79	166,99	183	120	65	80	24	406	11,47
25 XH 200	2F	St	25	176,86	174,07	188	120	65	80	24	407	12,46
26 XH 200	2F	St	26	183,93	181,14	198	120	65	80	24	409	13,47
27 XH 200	2F	St	27	191,01	188,22	200	120	65	80	24	410	14,42
28 XH 200	2F	St	28	198,09	195,29	211	120	65	80	24	411	15,44
30 XH 200	2F	St	30	212,23	209,44	226	120	65	80	24	412	17,69
32 XH 200	2F	St	32	226,38	223,59	240	120	65	80	24	414	19,95
34 XH 200	2F	St	34	240,53	237,74	256	120	65	80	24	415	22,75

XH 300

Passo 7/8" (22,22 mm)

Per cinghie larghezza 3" (76,2 mm)

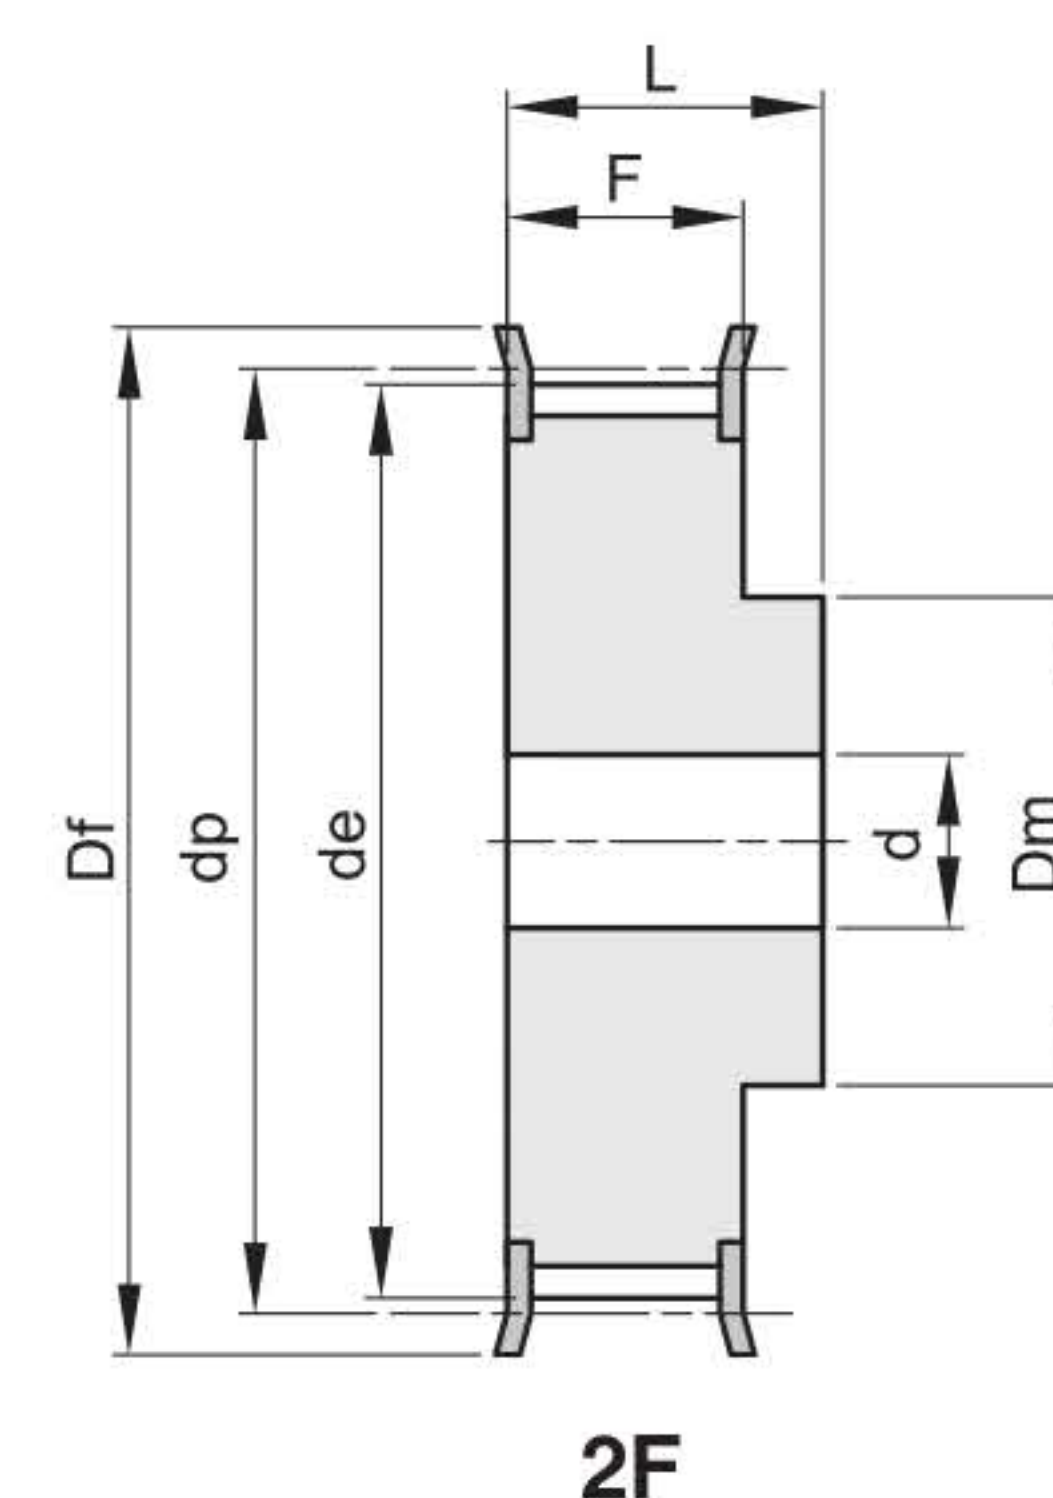


codice	tipo	materiale	denti	dp	de	Df	Dm	F	L	d	n° flangia	Kg.
18 XH 200	2F	St	18	127,34	124,55	138	100	65	80	24	401	6,00
19 XH 200	2F	St	19	134,41	131,62	146	100	65	80	24	402	6,60
20 XH 200	2F	St	20	141,49	138,69	154	100	65	80	24	403	7,30
21 XH 200	2F	St	21	148,56	145,77	160	110	65	80	24	404	8,73
22 XH 200	2F	St	22	155,64	152,84	168	110	65	80	24	405	9,55
24 XH 200	2F	St	24	169,79	166,99	183	120	65	80	24	406	11,47
25 XH 200	2F	St	25	176,86	174,07	188	120	65	80	24	407	12,46
26 XH 200	2F	St	26	183,93	181,14	198	120	65	80	24	409	13,47
27 XH 200	2F	St	27	191,01	188,22	200	120	65	80	24	410	14,42
28 XH 200	2F	St	28	198,09	195,29	211	120	65	80	24	411	15,44
30 XH 200	2F	St	30	212,23	209,44	226	120	65	80	24	412	17,69
32 XH 200	2F	St	32	226,38	223,59	240	120	65	80	24	414	19,95
34 XH 200	2F	St	34	240,53	237,74	256	120	65	80	24	415	22,75

XH 400

Passo 7/8" (22,22 mm)

Per cinghie larghezza 4" (101,6 mm)

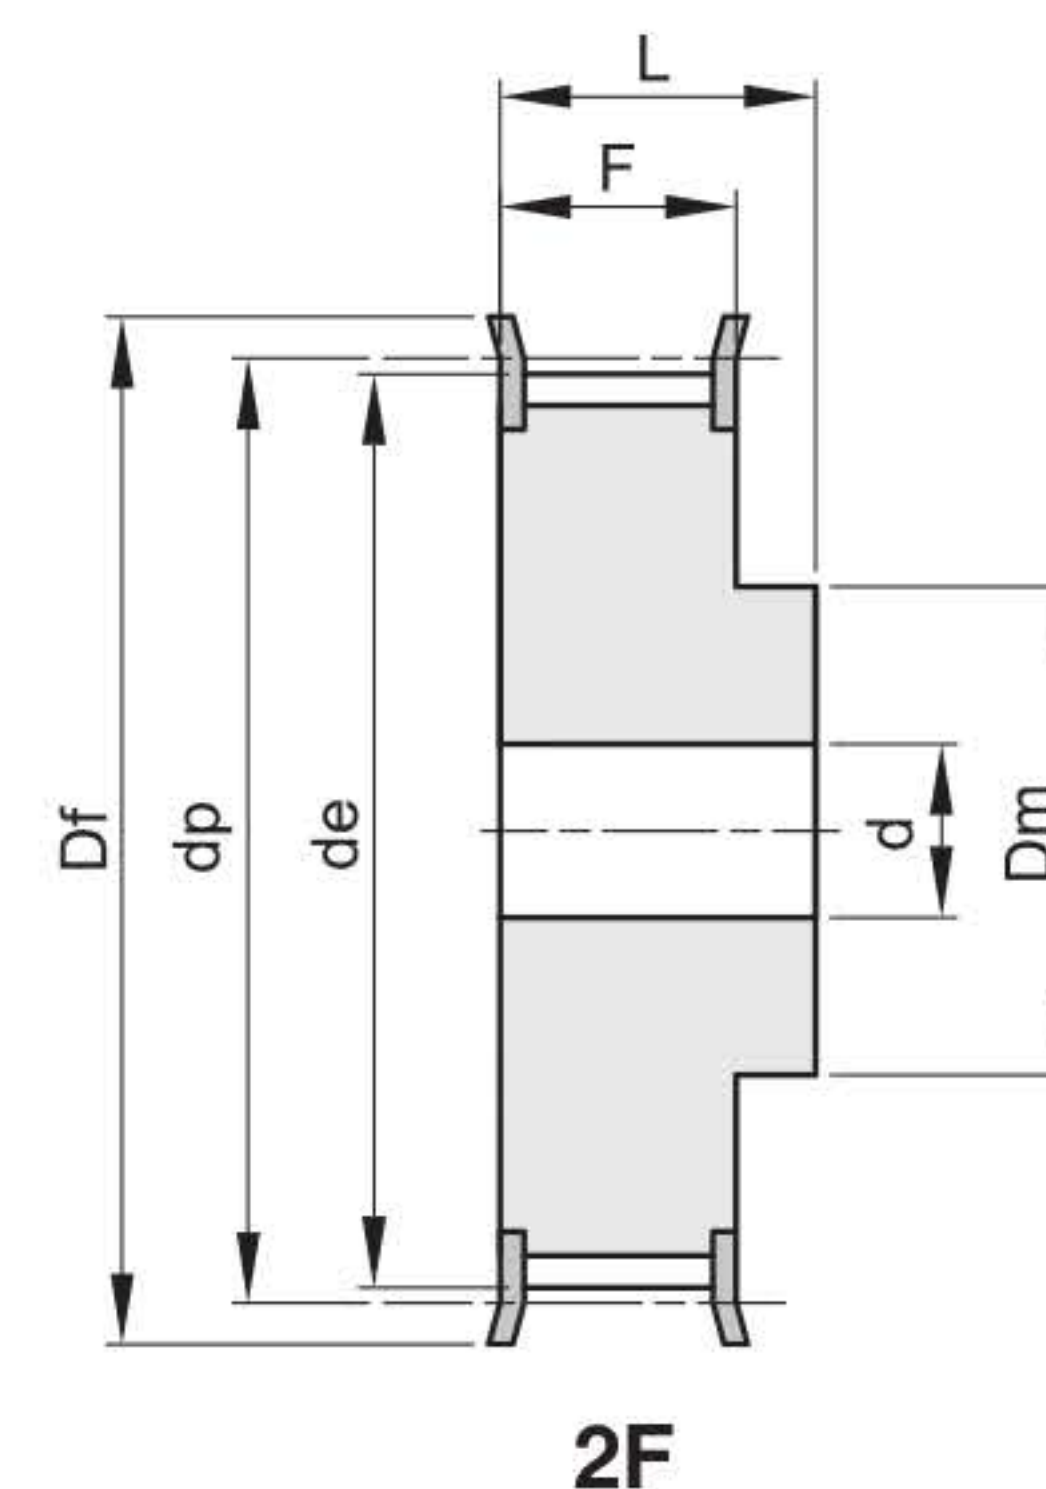


codice	tipo	materiale	denti	dp	de	Df	Dm	F	L	d	n° flangia	Kg.
18 XH 400	2F	St	18	127,34	124,55	138	100	119	132	32	401	9,60
19 XH 400	2F	St	19	134,41	131,62	146	100	119	132	32	402	10,80
20 XH 400	2F	St	20	141,49	138,69	154	100	119	132	32	403	12,87
21 XH 400	2F	St	21	148,56	145,77	160	110	119	132	32	404	14,42
22 XH 400	2F	St	22	155,64	152,84	168	110	119	132	32	405	15,44
24 XH 400	2F	St	24	169,79	166,99	183	120	119	132	32	406	19,22
25 XH 400	2F	St	25	176,86	174,07	188	120	119	132	32	407	21,05
26 XH 400	2F	St	26	183,93	181,14	198	120	119	132	32	409	22,80
27 XH 400	2F	St	27	191,01	188,22	200	120	119	132	32	410	24,66
28 XH 400	2F	St	28	198,09	195,29	211	150	119	132	32	411	27,23
30 XH 400	2F	St	30	212,23	209,44	226	150	119	132	32	412	31,30
32 XH 400	2F	St	32	226,38	223,59	240	150	119	132	32	414	35,20
34 XH 400	2F	St	34	240,53	237,74	256	150	119	132	32	415	40,00


L 050

Passo 3/8" (9,525 mm)


Per cinghie larghezza 1/2" (12,7 mm)

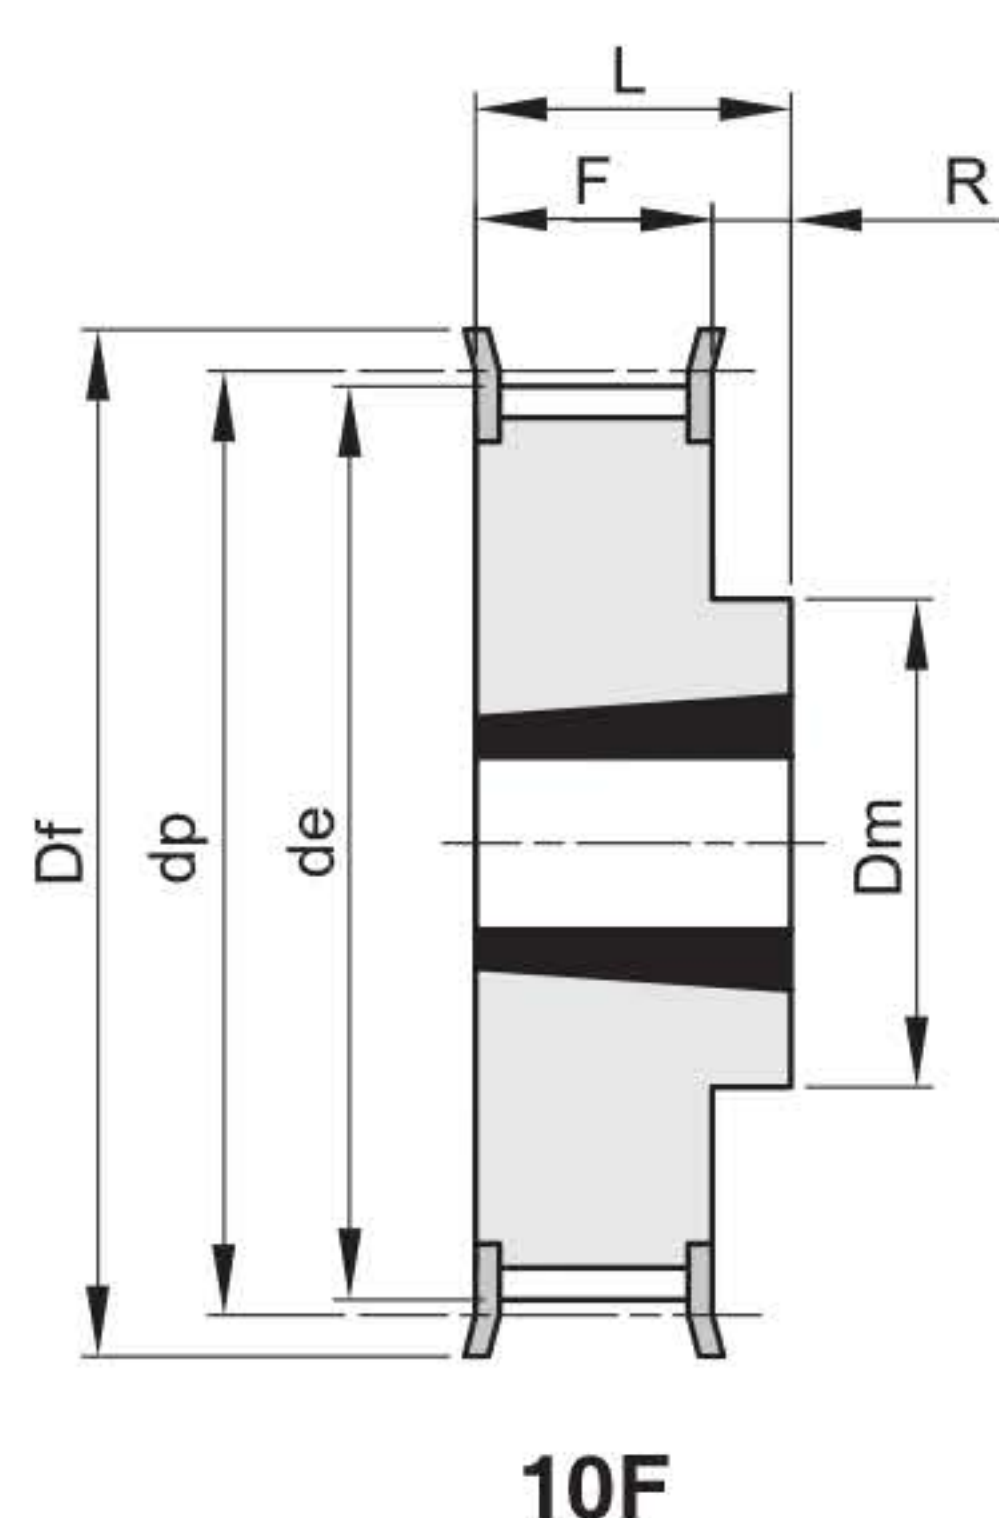


10F

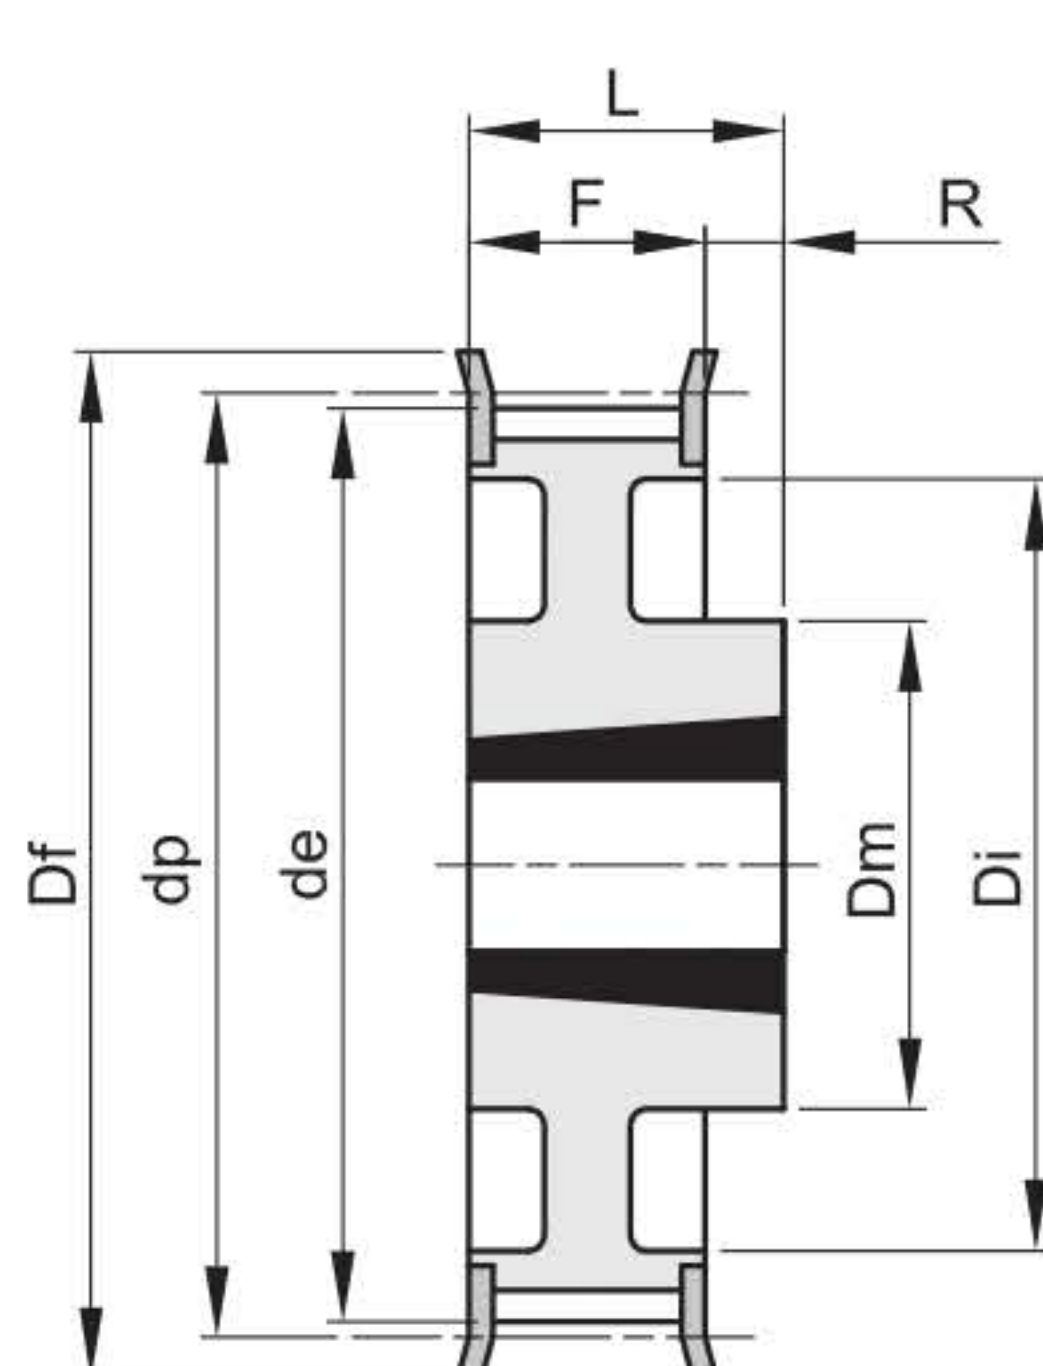

11F

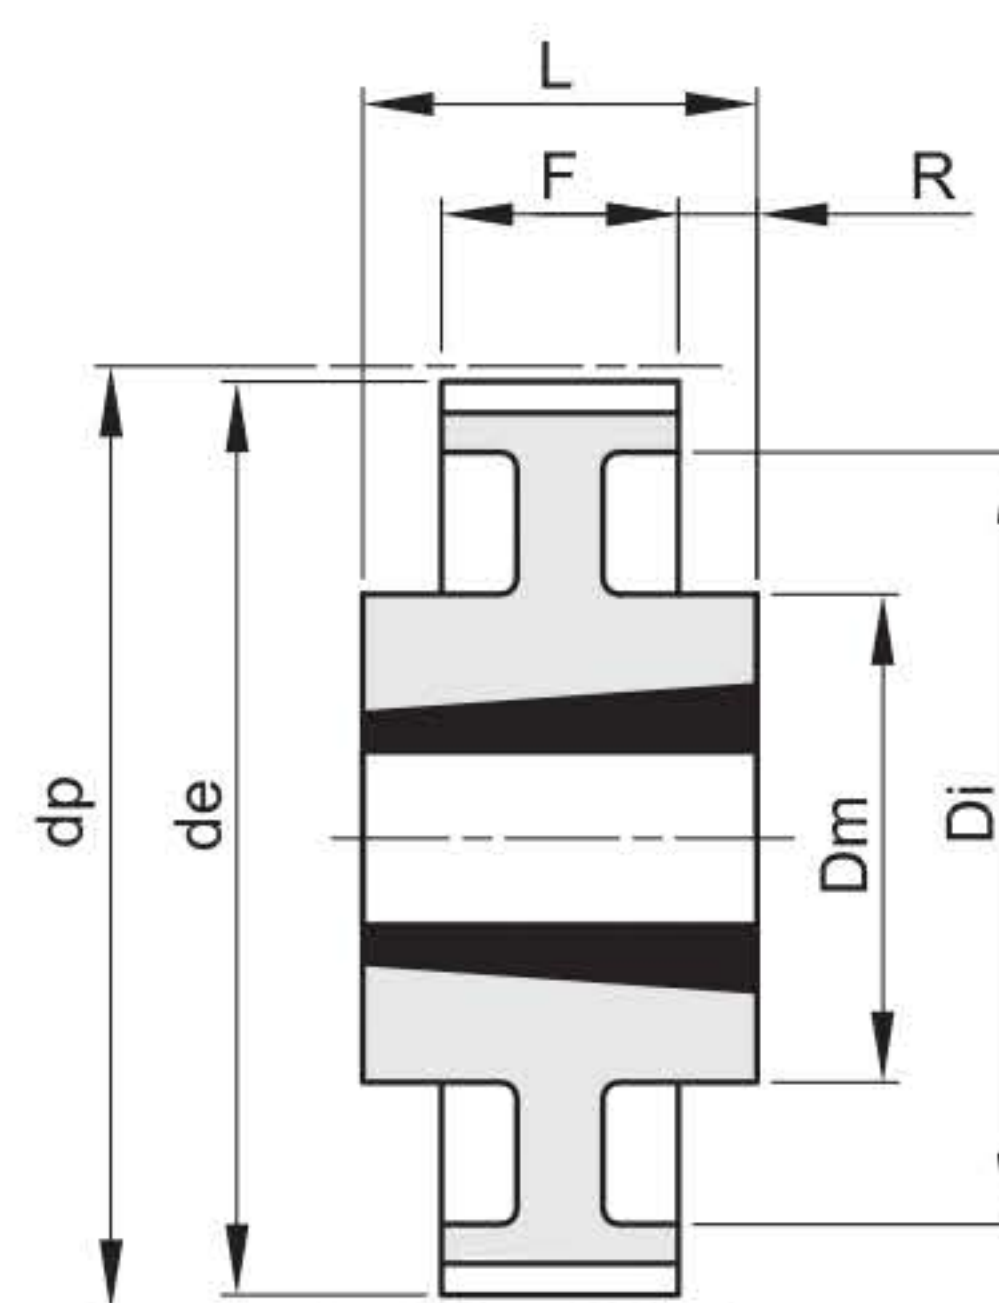

13

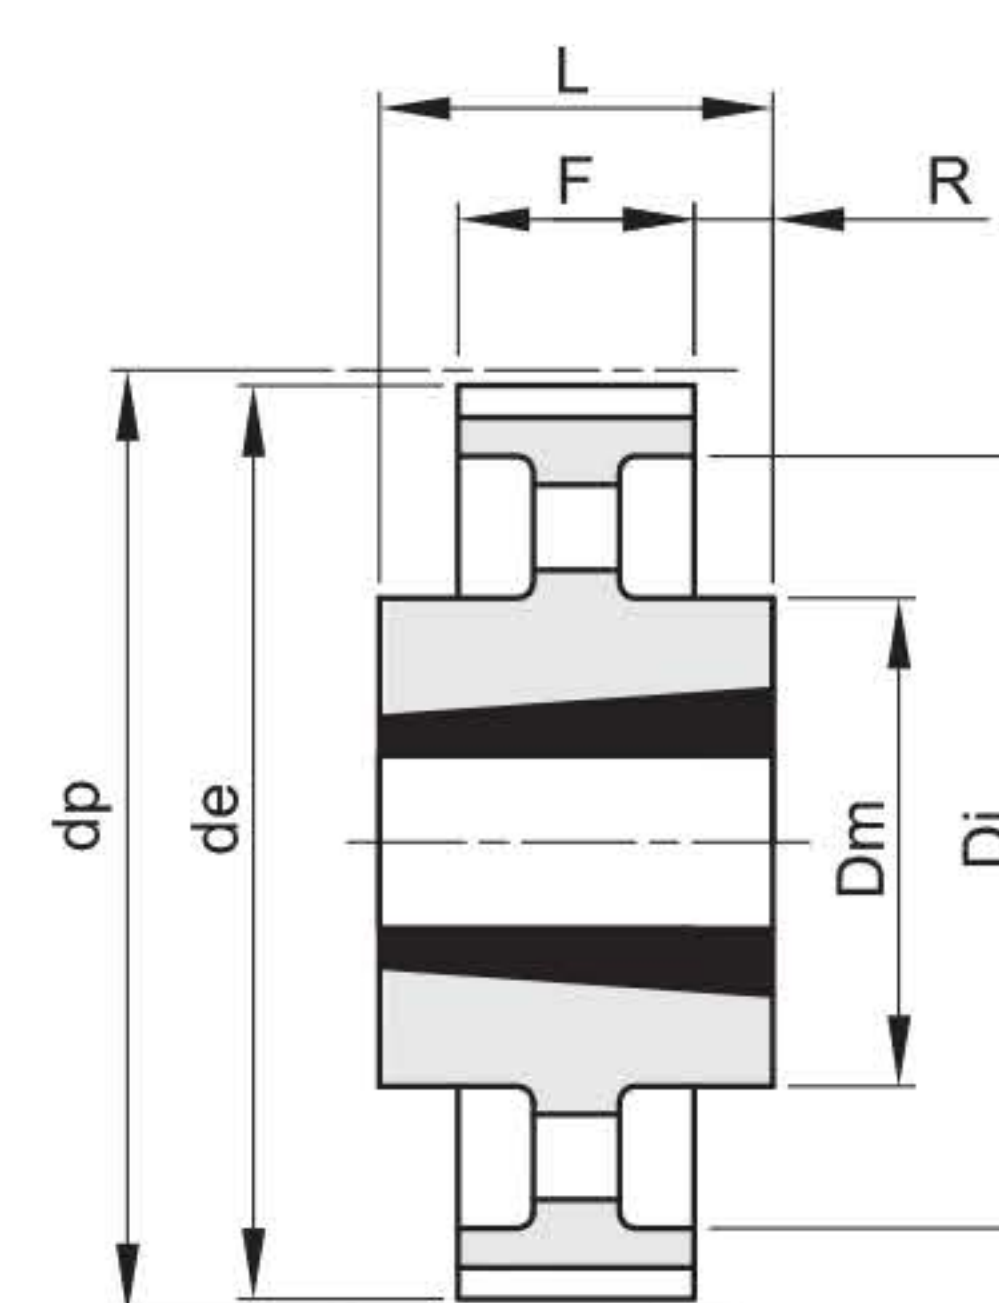


14

codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 18 L 050	10F	St	18	1108	28	54,57	53,81	60	45		19,0	22,0	3	308	0,20
B 19 L 050	10F	St	19	1108	28	57,61	56,84	63	45		19,0	22,0	3	309	0,23
B 20 L 050	10F	St	20	1108	28	60,64	59,88	66	48		19,0	22,0	3	310	0,27
B 21 L 050	10F	St	21	1108	28	63,67	62,91	71	48		19,0	22,0	3	311	0,30
B 22 L 050	10F	St	22	1108	28	66,70	65,94	75	51		19,0	22,0	3	312	0,34
B 23 L 050	10F	St	23	1108	28	69,73	68,97	79	54		19,0	22,0	3	313	0,40
B 24 L 050	10F	St	24	1108	28	72,77	72,00	79	54		19,0	22,0	3	313	0,45
B 25 L 050	10F	St	25	1108	28	75,80	75,04	83	56		19,0	22,0	3	314	0,50
B 26 L 050	10F	St	26	1108	28	78,83	78,07	87	60		19,0	22,0	3	315	0,55
B 27 L 050	10F	St	27	1108	28	81,86	81,10	87	62		19,0	22,0	3	315	0,60
B 28 L 050	10F	St	28	1108	28	84,89	84,13	91	65		19,0	22,0	3	316	0,65
B 30 L 050	10F	St	30	1108	28	90,96	90,20	97	70		19,0	22,0	3	318	0,80
B 32 L 050	10F	St	32	1108	28	97,02	96,26	103	74		19,0	22,0	3	320	0,98
B 36 L 050	10F	St	36	1108	28	109,15	108,39	115	85		19,0	22,0	3	323	1,20
B 40 L 050	10F	St	40	1610	42	121,28	120,51	127	97		19,0	25,0	6	327	1,40
B 48 L 050	11F	St	48	1610	42	145,53	144,77	152	88	120	19,0	25,0	6	334	2,30
B 60 L 050	13	St	60	1610	42	181,91	181,15		92	166	19,0	25,0	3		2,20
B 72 L 050	14	GG	72	1610	42	218,30	217,53		92	202	19,0	25,0	3		2,10
B 84 L 050	14	GG	84	1610	42	254,68	253,90		92	236	19,0	25,0	3		2,46
B 96 L 050	14	GG	96	2012	50	291,06	290,30		106	270	19,0	32,0	6,5		3,36
B 120 L 050	14	GG	120	2012	50	363,83	363,07		106	343	19,0	32,0	6,5		4,44

L 075

Passo 3/8"" (9,525 mm)

Per cinghie larghezza 3/4" (19,05 mm)

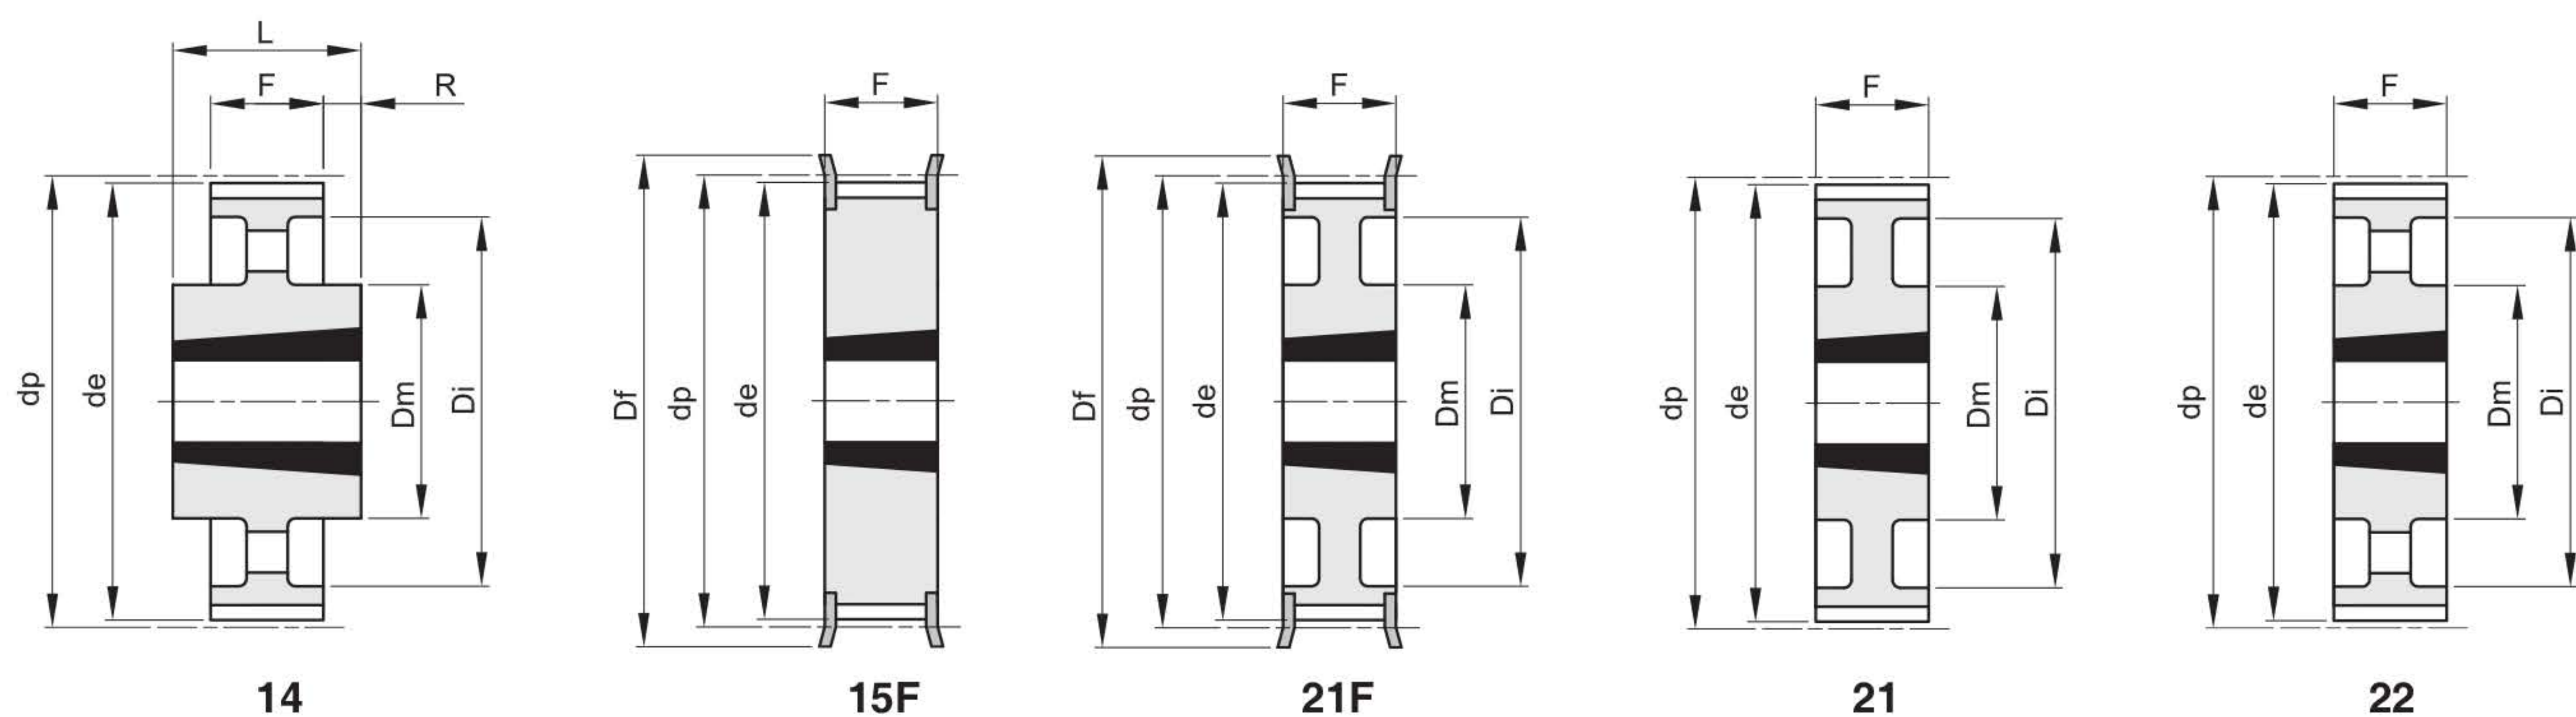


codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 18 L 075	15F	St	18	1108	28	54,57	53,81	60			25,0	25,0		308	0,25
B 19 L 075	15F	St	19	1108	28	57,61	56,84	63			25,0	25,0		309	0,32
B 20 L 075	15F	St	20	1108	28	60,64	59,88	66			25,0	25,0		310	0,35
B 21 L 075	15F	St	21	1108	28	63,67	62,91	71			25,0	25,0		311	0,40
B 22 L 075	15F	St	22	1108	28	66,70	65,94	75			25,0	25,0		312	0,44
B 23 L 075	15F	St	23	1108	28	69,73	68,97	79			25,0	25,0		313	0,48
B 24 L 075	15F	St	24	1108	28	72,77	72,00	79			25,0	25,0		313	0,55
B 25 L 075	15F	St	25	1108	28	75,80	75,04	83			25,0	25,0		314	0,63
B 26 L 075	15F	St	26	1108	28	78,83	78,07	87			25,0	25,0		315	0,66
B 27 L 075	15F	St	27	1108	28	81,86	81,10	87			25,0	25,0		315	0,70
B 28 L 075	15F	St	28	1108	28	84,89	84,13	91			25,0	25,0		316	0,72
B 30 L 075	15F	St	30	1108	28	90,96	90,20	97			25,0	25,0		318	0,93
B 32 L 075	15F	St	32	1108	28	97,02	96,26	103			25,0	25,0		320	1,10
B 36 L 075	15F	St	36	1610	42	109,15	108,39	115			25,0	25,0		323	1,20
B 40 L 075	15F	St	40	1610	42	121,28	120,51	127			25,0	25,0		327	1,70
B 48 L 075	21F	St	48	1610	42	145,53	144,77	152	92	120	25,0	25,0		334	2,60
B 60 L 075	21	St	60	1610	42	181,91	181,15		92	166	25,0	25,0			3,00
B 72 L 075	22	GG	72	1610	42	218,30	217,53		92	202	25,0	25,0			2,33
B 84 L 075	14	GG	84	2012	50	254,68	253,90		106	236	25,0	32,0	3,5		3,55
B 96 L 075	14	GG	96	2012	50	291,06	290,30		106	270	25,0	32,0	3,5		3,95
B 120 L 075	14	GG	120	2012	50	363,83	363,07		106	343	25,0	32,0	3,5		5,61


L 100

Passo 3/8" (9,525 mm)


Per cinghie larghezza 1" (25,4 mm)

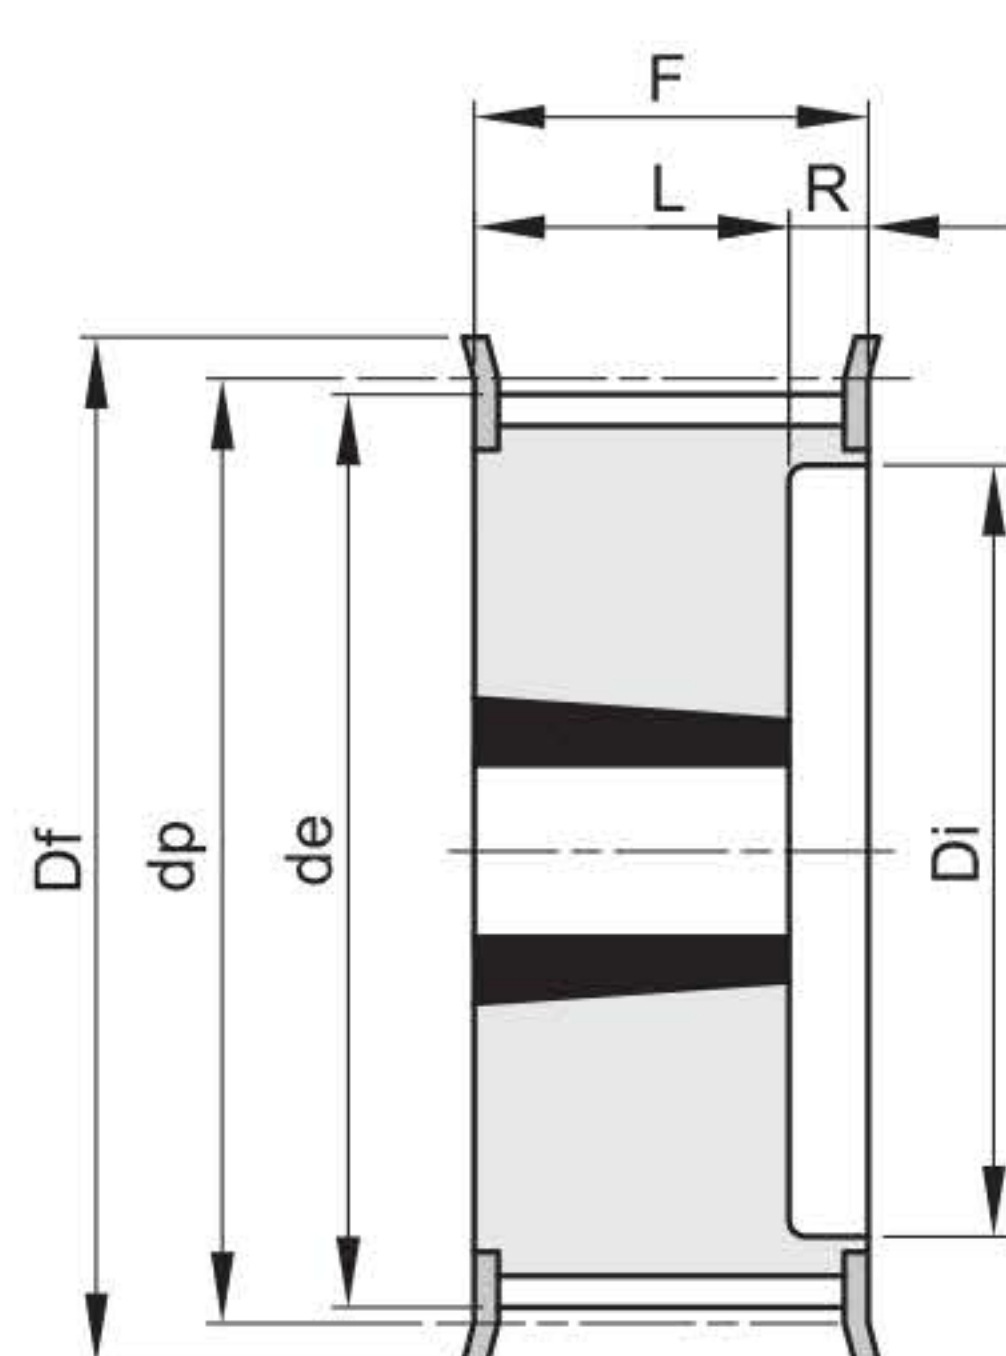


16F

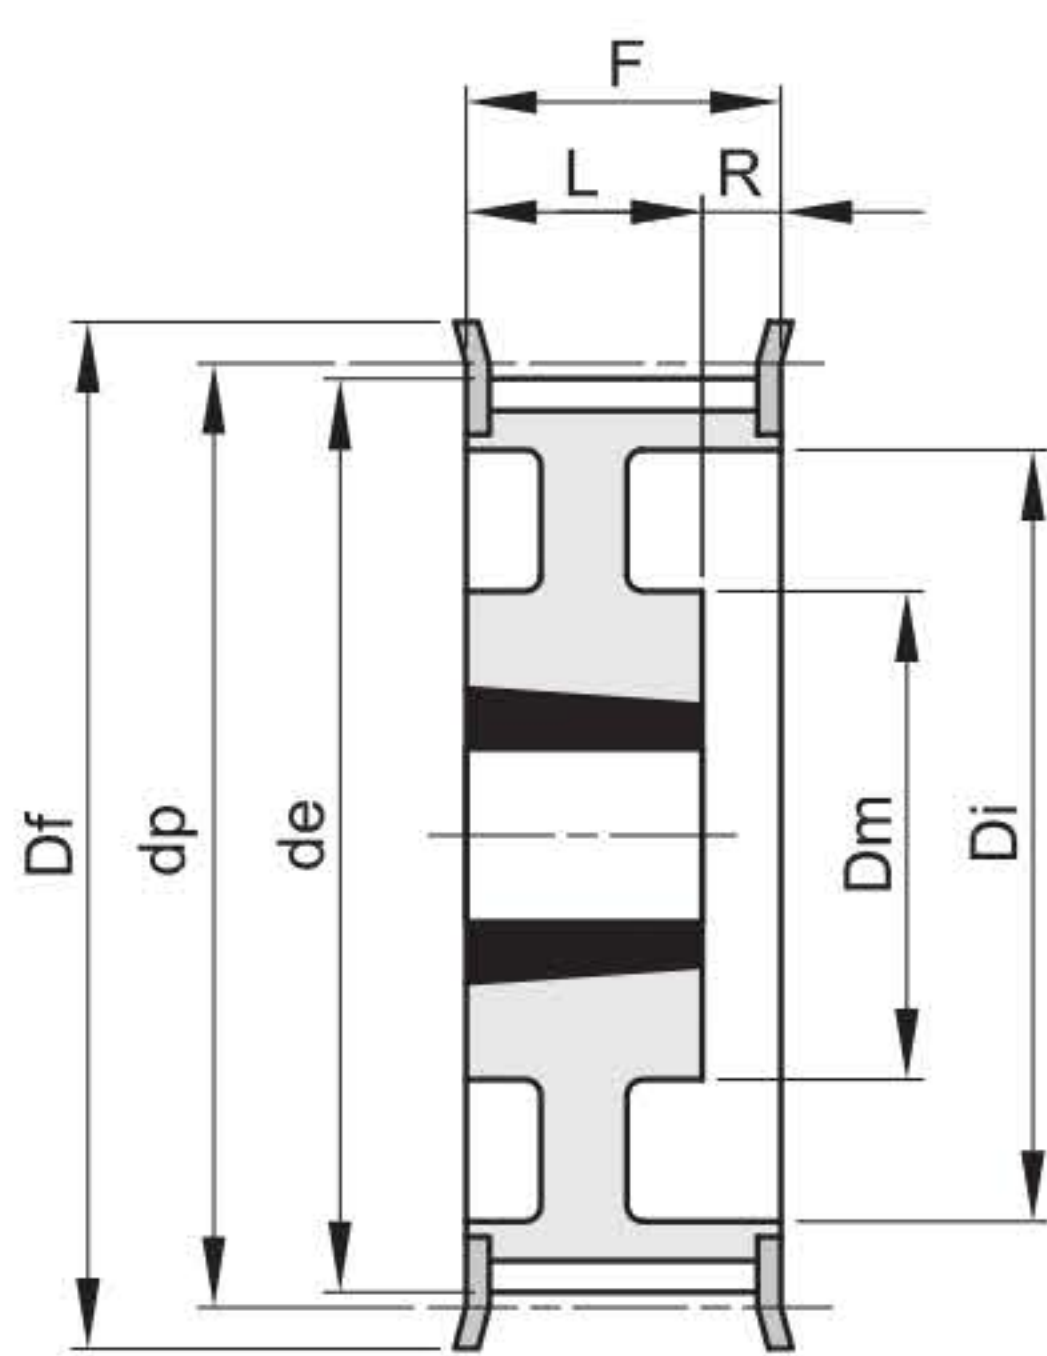

17F

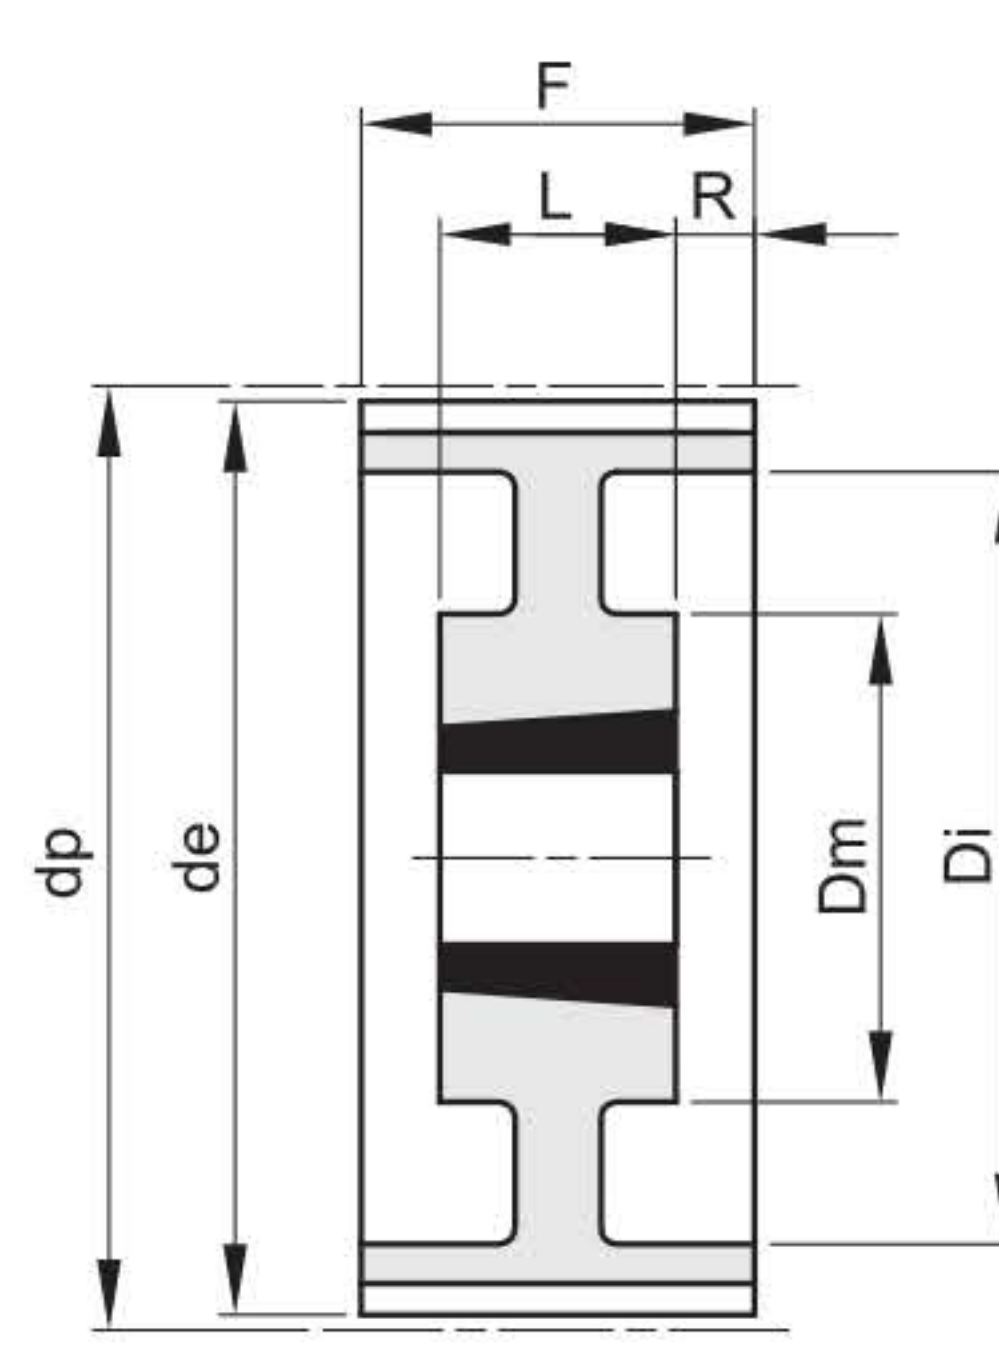

19

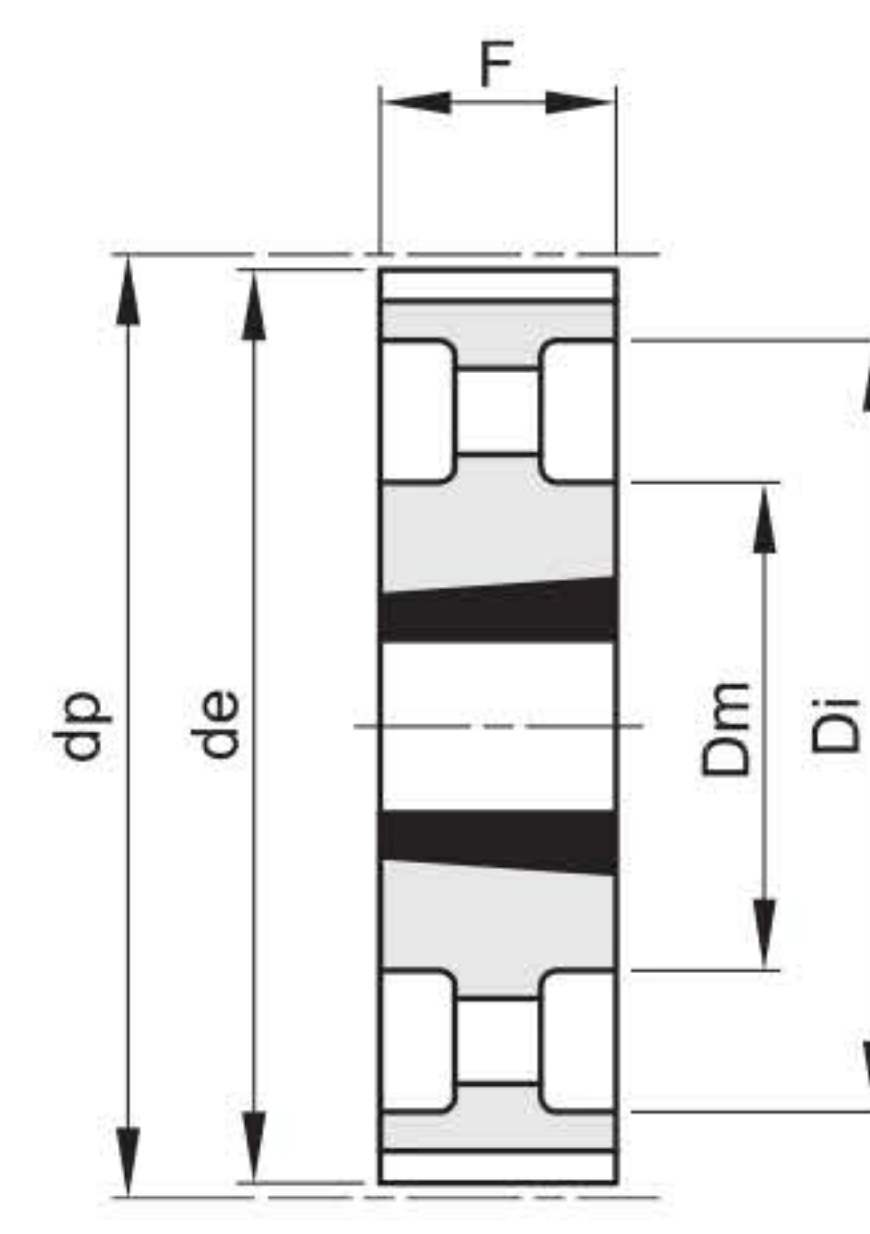


22

codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 18 L 100	16F	St	18	1108	28	54,57	53,81	60		38	31,0	22,0	9,0	308	0,20
B 19 L 100	16F	St	19	1108	28	57,61	56,84	63		38	31,0	22,0	9,0	309	0,32
B 20 L 100	16F	St	20	1108	28	60,64	59,88	66		45	31,0	22,0	9,0	310	0,41
B 21 L 100	16F	St	21	1108	28	63,67	62,91	71		45	31,0	22,0	9,0	311	0,45
B 22 L 100	16F	St	22	1108	28	66,70	65,94	75		48	31,0	22,0	9,0	312	0,47
B 23 L 100	16F	St	23	1108	28	69,73	68,97	79		52	32,0	22,0	10,0	313	0,50
B 24 L 100	16F	St	24	1108	28	72,77	72,00	79		52	32,0	22,0	10,0	313	0,64
B 25 L 100	16F	St	25	1108	28	75,80	75,04	83		54	32,0	22,0	10,0	314	0,68
B 26 L 100	16F	St	26	1108	28	78,83	78,07	87		60	32,0	22,0	10,0	315	0,70
B 27 L 100	16F	St	27	1108	28	81,86	81,10	87		60	32,0	22,0	10,0	315	0,83
B 28 L 100	16F	St	28	1108	28	84,89	84,13	91		65	32,0	22,0	10,0	316	0,85
B 30 L 100	16F	St	30	1210	32	90,96	90,20	97		71	32,0	25,0	7,0	318	0,90
B 32 L 100	16F	St	32	1210	32	97,02	96,26	103		75	32,0	25,0	7,0	320	1,05
B 36 L 100	16F	St	36	1610	42	109,15	108,39	115		86	32,0	25,0	7,0	323	1,40
B 40 L 100	16F	St	40	1610	42	121,28	120,51	127		96	32,0	25,0	7,0	327	1,65
B 48 L 100	17F	St	48	1610	42	145,53	144,77	152	92	120	32,0	25,0	7,0	334	2,80
B 60 L 100	19	St	60	1610	42	181,91	181,15		92	166	32,0	25,0	3,5		2,70
B 72 L 100	22	GG	72	2012	50	218,30	217,53		106	202	32,0	32,0			2,96
B 84 L 100	22	GG	84	2012	50	254,68	253,90		106	236	32,0	32,0			3,87
B 96 L 100	22	GG	96	2012	50	291,06	290,30		106	270	32,0	32,0			4,64
B 120 L 100	22	GG	120	2012	50	363,83	363,07		106	343	32,0	32,0			6,37

H 100

Passo 1/2" (12,7 mm)

Per cinghie larghezza 1" (25,4 mm)

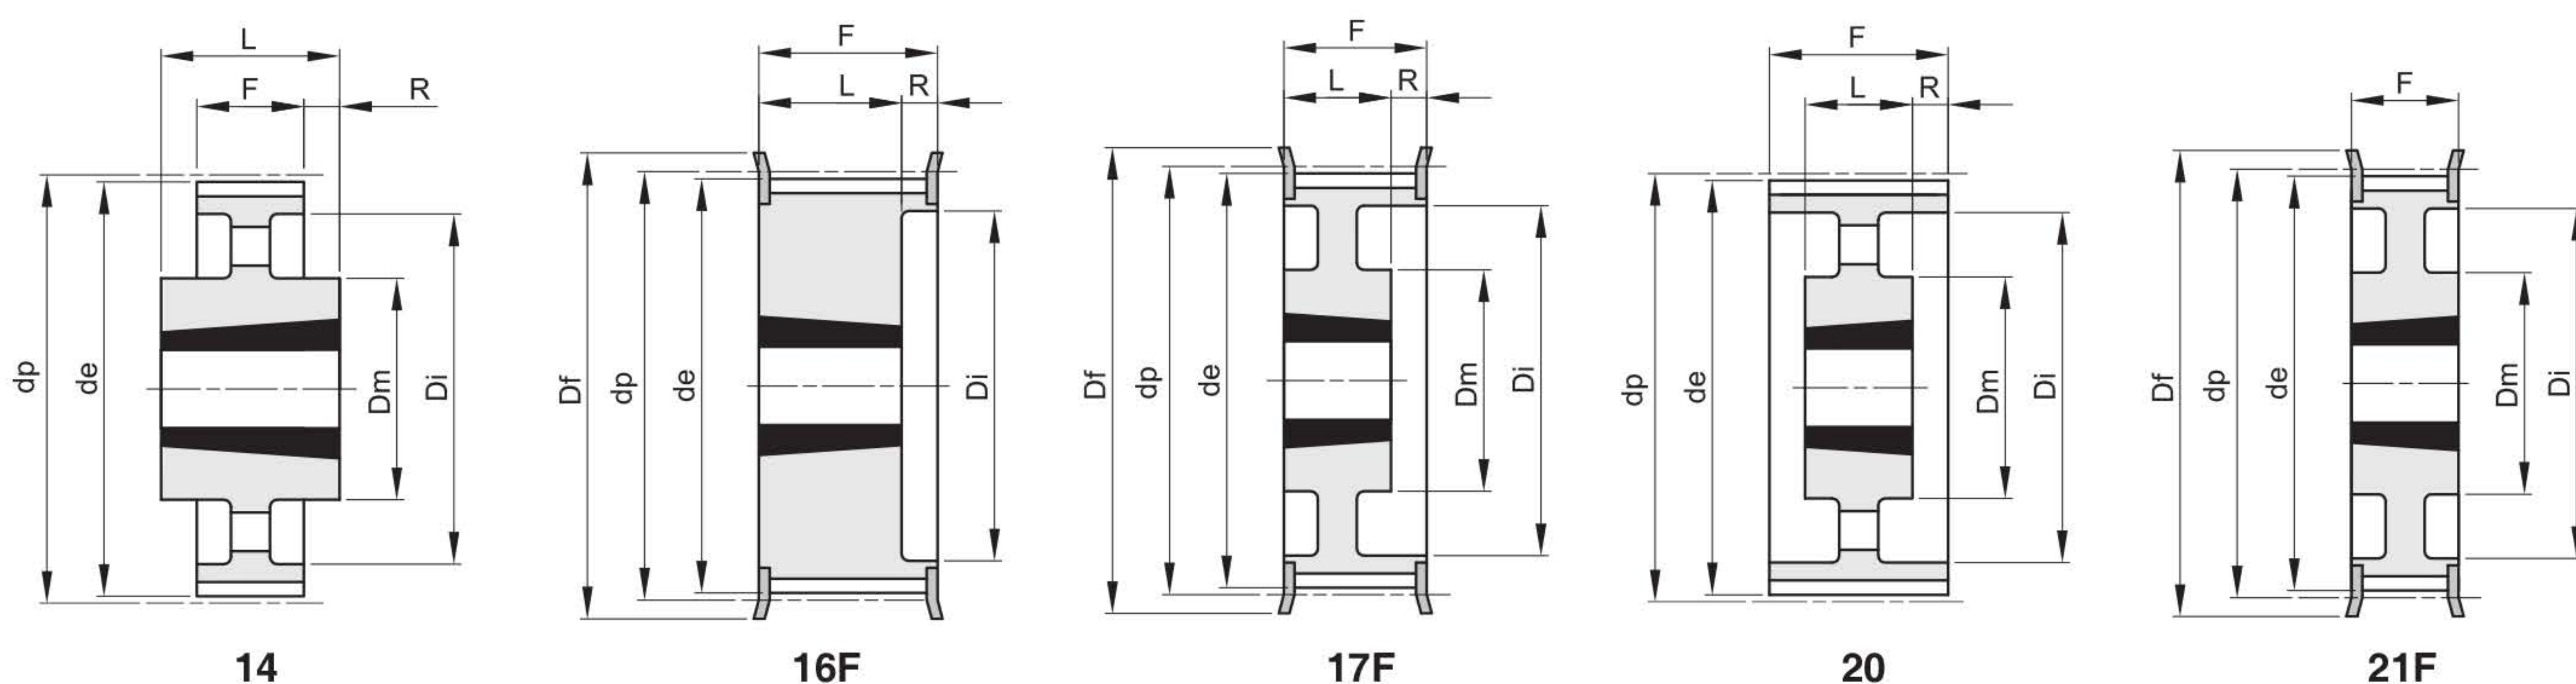


codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 16 H 100	16F	St	16	1108	28	64,68	63,31	71		45	31,0	22,0	9,0	311	0,42
B 18 H 100	16F	St	18	1210	32	72,77	71,39	79		52	31,0	25,0	6,0	313	0,49
B 19 H 100	16F	St	19	1210	32	76,81	75,44	83		56	31,0	25,0	6,0	314	0,62
B 20 H 100	16F	St	20	1210	32	80,85	79,48	87		60	31,0	25,0	6,0	315	0,73
B 21 H 100	16F	St	21	1210	32	84,89	83,52	91		64	32,0	25,0	7,0	316	0,80
B 22 H 100	16F	St	22	1210	32	88,94	87,56	93		67	32,0	25,0	7,0	317	0,94
B 23 H 100	16F	St	23	1610	42	92,98	91,61	97		70	32,0	25,0	7,0	318	0,97
B 24 H 100	16F	St	24	1610	42	97,02	95,65	103		73,5	32,0	25,0	7,0	320	1,05
B 25 H 100	16F	St	25	1610	42	101,06	99,69	106		77	32,0	25,0	7,0	321	1,10
B 26 H 100	16F	St	26	1610	42	105,11	103,73	111		82	32,0	25,0	7,0	322	1,20
B 27 H 100	16F	St	27	1610	42	109,15	107,78	115		85	32,0	25,0	7,0	323	1,35
B 28 H 100	16F	St	28	1610	42	113,19	111,82	119		90,5	32,0	25,0	7,0	325	1,50
B 30 H 100	16F	St	30	1610	42	121,28	119,90	127		98	32,0	25,0	7,0	327	1,78
B 32 H 100	17F	St	32	1610	42	129,36	127,99	135	90	106	32,0	25,0	7,0	328	2,05
B 36 H 100	17F	St	36	1610	42	145,53	144,16	152	92	121	32,0	25,0	7,0	334	2,80
B 40 H 100	17F	St	40	1610	42	161,70	160,33	168	92	138	32,0	25,0	7,0	338	3,65
B 44 H 100	21F	St	44	2012	50	177,87	176,50	184	106	152	32,0	32,0		339	3,86
B 48 H 100	21F	St	48	2012	50	194,04	192,67	200	106	169	32,0	32,0		342	4,20
B 60 H 100	20	GG	60	2012	50	242,55	241,18		106	223	34,0	32,0	1,0		3,76
B 72 H 100	20	GG	72	2012	50	291,06	289,69		106	270	34,0	32,0	1,0		4,88
B 84 H 100	20	GG	84	2012	50	339,57	338,20		106	318	34,0	32,0	1,0		6,12
B 96 H 100	14	GG	96	2517	60	388,08	386,71		119	366	34,0	45,0	5,5		7,95
B 120 H 100	14	GG	120	2517	60	485,10	483,73		119	462	34,0	45,0	5,5		10,05


H 150

Passo 1/2" (12,7 mm)


Per cinghie larghezza 1" 1/2 (38,1 mm)

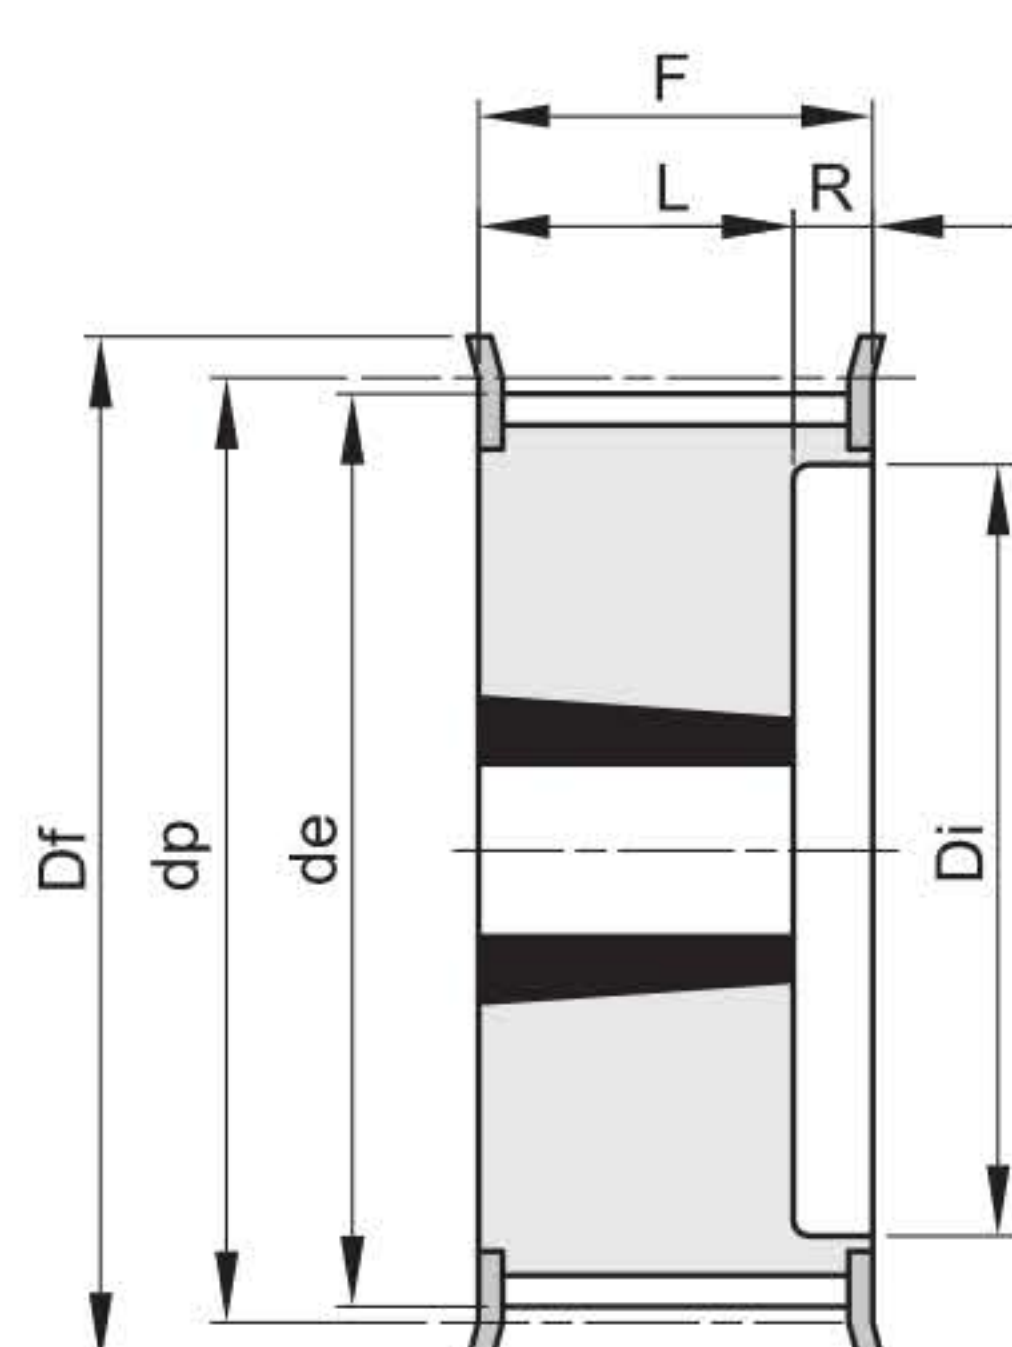

16F

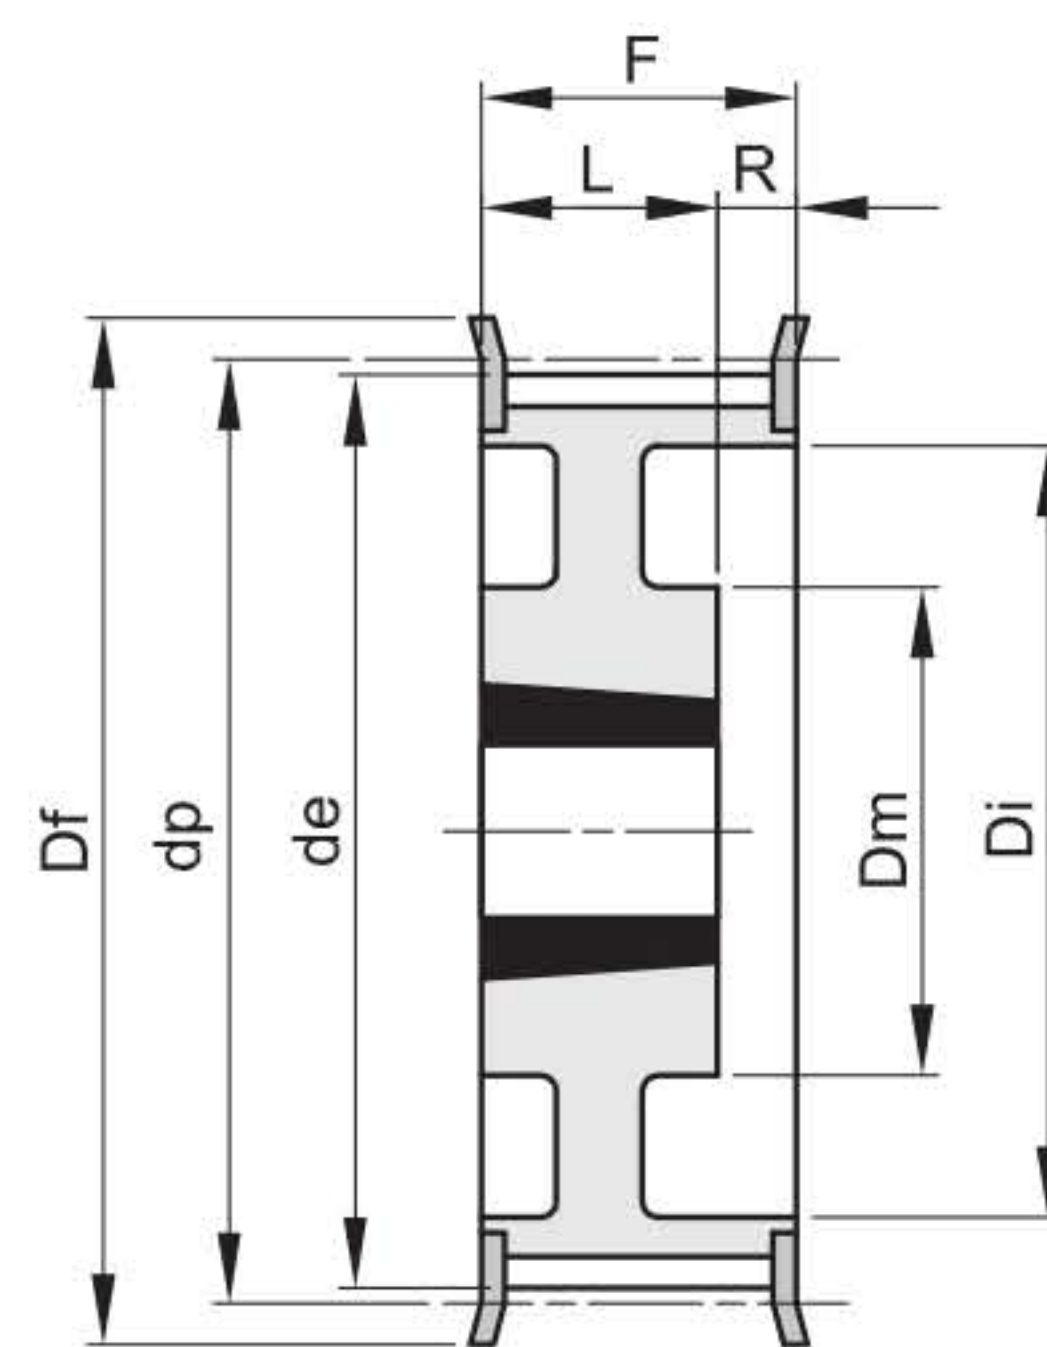

17F

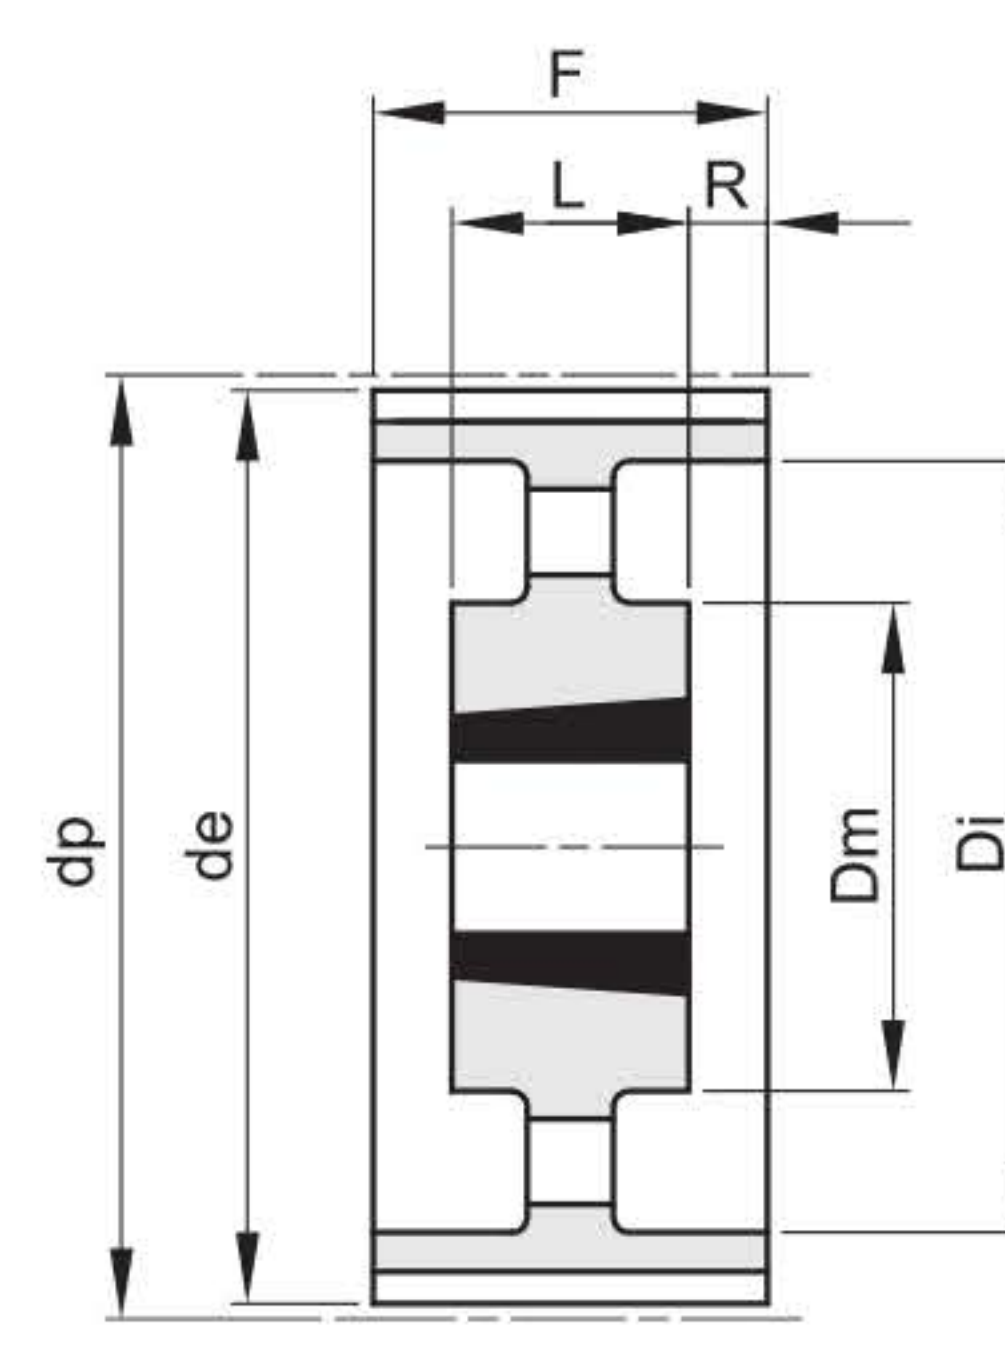


20

codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 18 H 150	16F	St	18	1210	32	72,77	71,39	79		52	45,0	25,0	20,0	313	0,60
B 19 H 150	16F	St	19	1210	32	76,81	75,44	83		56	45,0	25,0	20,0	314	0,72
B 20 H 150	16F	St	20	1210	32	80,85	79,48	87		60	45,0	25,0	20,0	315	0,83
B 21 H 150	16F	St	21	1210	32	84,89	83,52	91		64	45,0	25,0	20,0	316	1,00
B 22 H 150	16F	St	22	1210	32	88,94	87,56	93		67	45,0	25,0	20,0	317	1,25
B 23 H 150	16F	St	23	1610	42	92,98	91,61	97		70	45,0	25,0	20,0	318	1,05
B 24 H 150	16F	St	24	1610	42	97,02	95,65	103		73,5	45,0	25,0	20,0	320	1,10
B 25 H 150	16F	St	25	1610	42	101,06	99,69	106		77	45,0	25,0	20,0	321	1,30
B 26 H 150	16F	St	26	1610	42	105,11	103,73	111		82	45,0	25,0	20,0	322	1,42
B 27 H 150	16F	St	27	1610	42	109,15	107,78	115		85	45,0	25,0	20,0	323	1,65
B 28 H 150	16F	St	28	1610	42	113,19	111,82	119		90,5	45,0	25,0	20,0	325	1,88
B 30 H 150	16F	St	30	1610	42	121,28	119,90	127		98	45,0	25,0	20,0	327	2,05
B 32 H 150	17F	St	32	1610	42	129,36	127,99	135	90	106	45,0	25,0	20,0	328	2,35
B 36 H 150	17F	St	36	1610	42	145,53	144,16	152	92	121	45,0	25,0	20,0	334	3,20
B 40 H 150	17F	St	40	1610	42	161,70	160,33	168	92	138	45,0	25,0	20,0	338	4,10
B 44 H 150	17F	St	44	2012	50	177,87	176,50	184	106	152	45,0	32,0	13,0	339	4,50
B 48 H 150	17F	St	48	2012	50	194,04	192,67	200	106	169	45,0	32,0	13,0	342	4,80
B 60 H 150	20	GG	60	2012	50	242,55	241,18		106	223	46,0	32,0	7,0		4,51
B 72 H 150	20	GG	72	2012	50	291,06	289,69		106	270	46,0	32,0	7,0		6,16
B 84 H 150	20	GG	84	2012	50	339,57	338,20		106	320	46,0	32,0	7,0		7,40
B 96 H 150	20	GG	96	2517	60	388,08	386,71		119	366	46,0	45,0	0,5		9,87
B 120H 150	20	GG	120	2517	60	485,10	483,73		119	462	46,0	45,0	0,5		13,50


H 200

Passo 1/2" (12,7 mm)


Per cinghie larghezza 2" (50,8 mm)

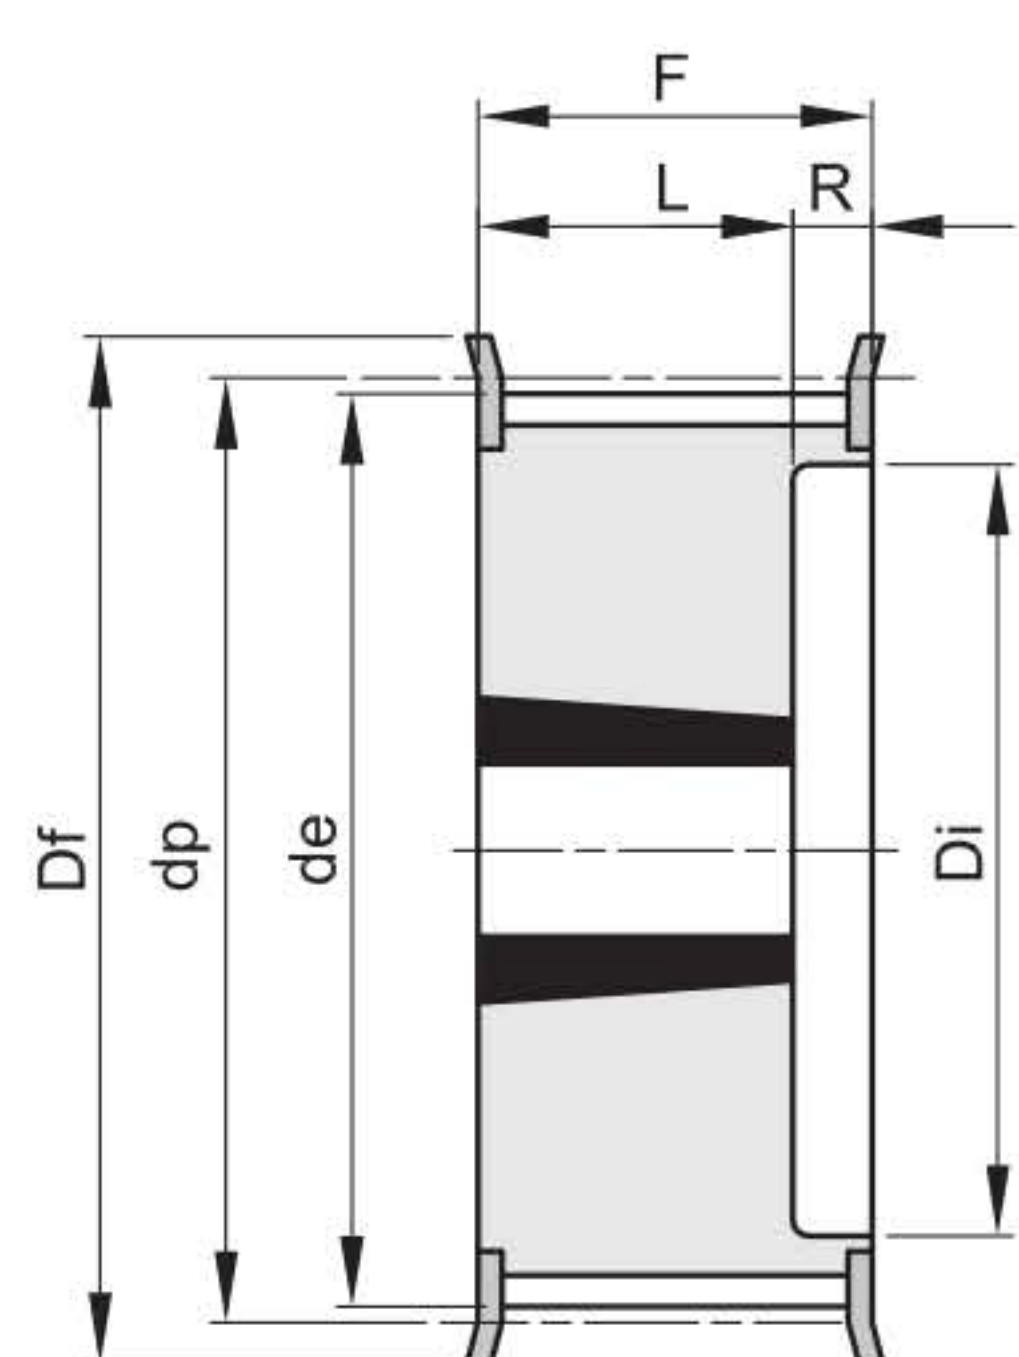

16F

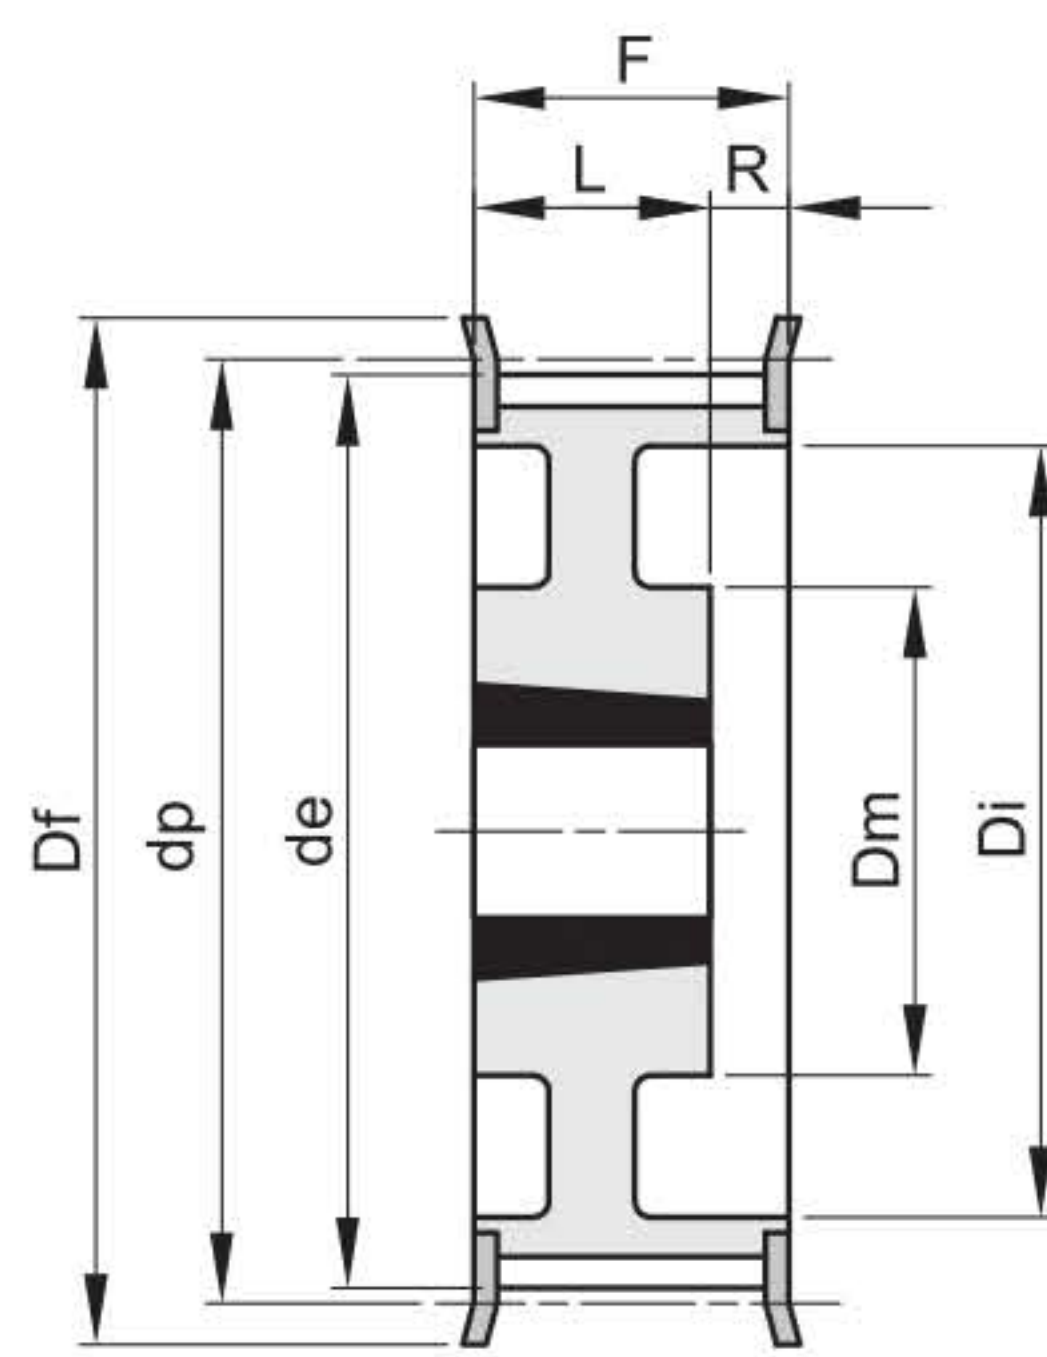

17F

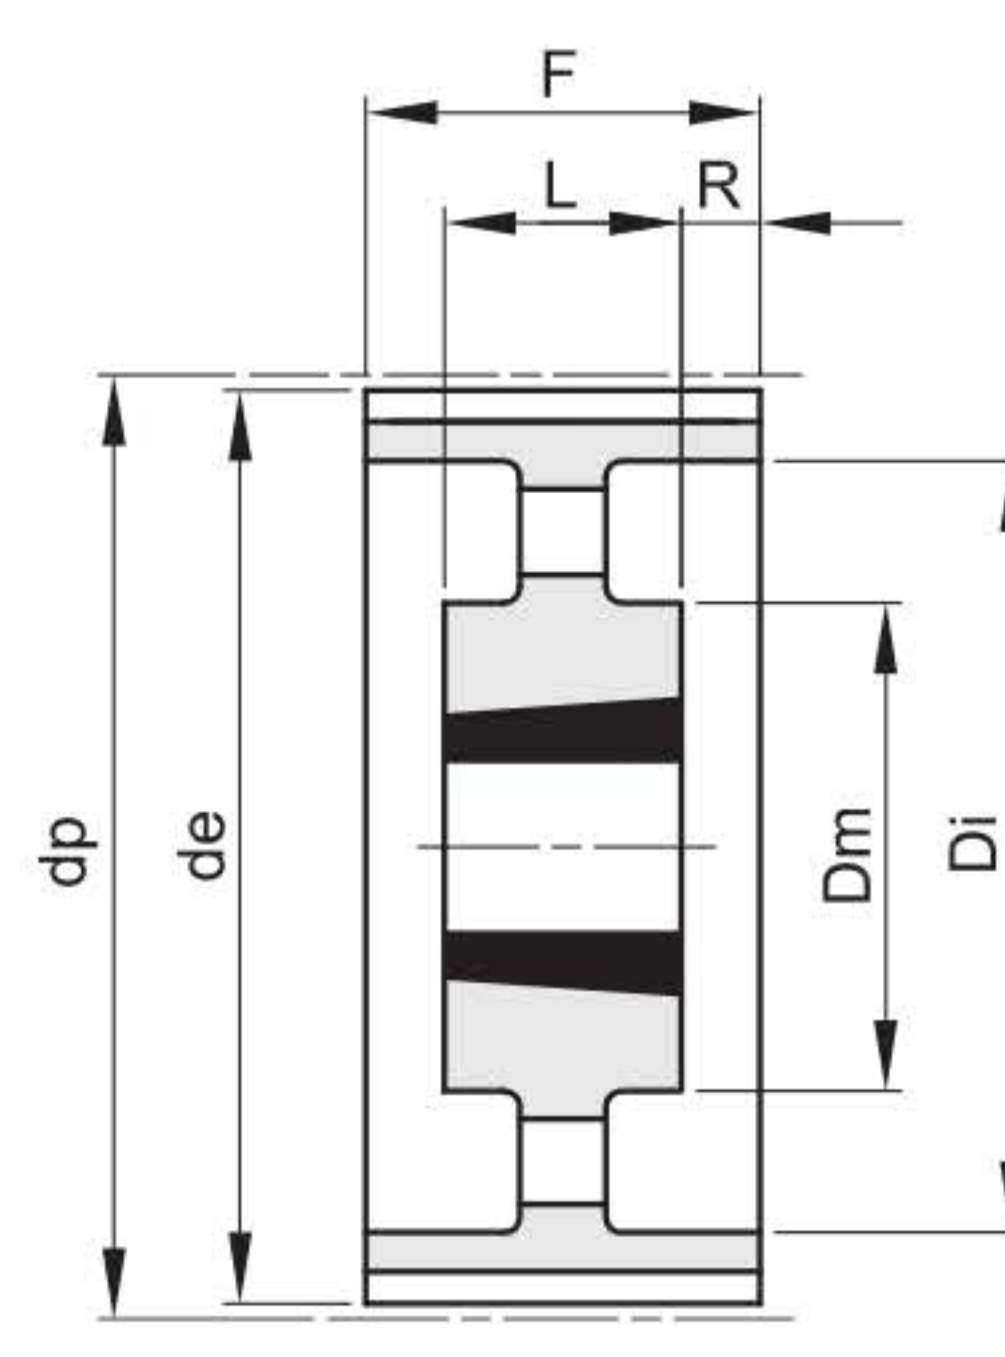


20

codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 18 H 200	16F	St	18	1210	32	72,77	71,39	79		52	58,0	25,0	33,0	313	0,84
B 19 H 200	16F	St	19	1210	32	76,81	75,44	83		56	58,0	25,0	33,0	314	0,96
B 20 H 200	16F	St	20	1610	42	80,85	79,48	87		60	58,0	25,0	33,0	315	0,93
B 21 H 200	16F	St	21	1610	42	84,89	83,52	91		64	58,0	25,0	33,0	316	1,07
B 22 H 200	16F	St	22	1610	42	88,94	87,56	93		67	58,0	25,0	33,0	317	1,25
B 23 H 200	16F	St	23	1610	42	92,98	91,61	97		70	58,0	25,0	33,0	318	1,40
B 24 H 200	16F	St	24	1610	42	97,02	95,65	103		73,5	58,0	25,0	33,0	320	1,55
B 25 H 200	16F	St	25	1610	42	101,06	99,69	106		77	58,0	25,0	33,0	321	1,71
B 26 H 200	16F	St	26	1610	42	105,11	103,73	111		82	58,0	25,0	33,0	322	1,84
B 27 H 200	16F	St	27	1610	42	109,15	107,78	115		85	58,0	25,0	33,0	323	2,06
B 28 H 200	16F	St	28	1610	42	113,19	111,82	119		90,5	58,0	25,0	33,0	325	2,17
B 30 H 200	16F	St	30	1610	42	121,28	119,90	127		98	58,0	25,0	33,0	327	2,60
B 32 H 200	16F	St	32	2012	50	129,36	127,99	135		106	58,0	32,0	26,0	328	2,95
B 36 H 200	17F	St	36	2012	50	145,53	144,16	152	102	121	58,0	32,0	26,0	334	3,62
B 40 H 200	17F	St	40	2012	50	161,70	160,33	168	106	138	58,0	32,0	26,0	338	4,33
B 44 H 200	17F	St	44	2012	50	177,87	176,50	184	106	152	58,0	32,0	26,0	339	5,33
B 48 H 200	17F	St	48	2517	60	194,04	192,67	200	119	169	58,0	45,0	13,0	342	6,47
B 60 H 200	20	GG	60	2517	60	242,55	241,18		119	223	60,0	45,0	7,5		5,86
B 72 H 200	20	GG	72	2517	60	291,06	289,69		119	270	60,0	45,0	7,5		7,42
B 84 H 200	20	GG	84	2517	60	339,57	338,20		119	320	60,0	45,0	7,5		8,73
B 96 H 200	20	GG	96	2517	60	388,08	386,71		119	366	60,0	45,0	7,5		10,83
B 120H 200	20	GG	120	2517	60	485,10	483,73		119	462	60,0	45,0	7,5		14,95


H 300

Passo 1/2" (12,7 mm)


Per cinghie larghezza 3" (76,2 mm)

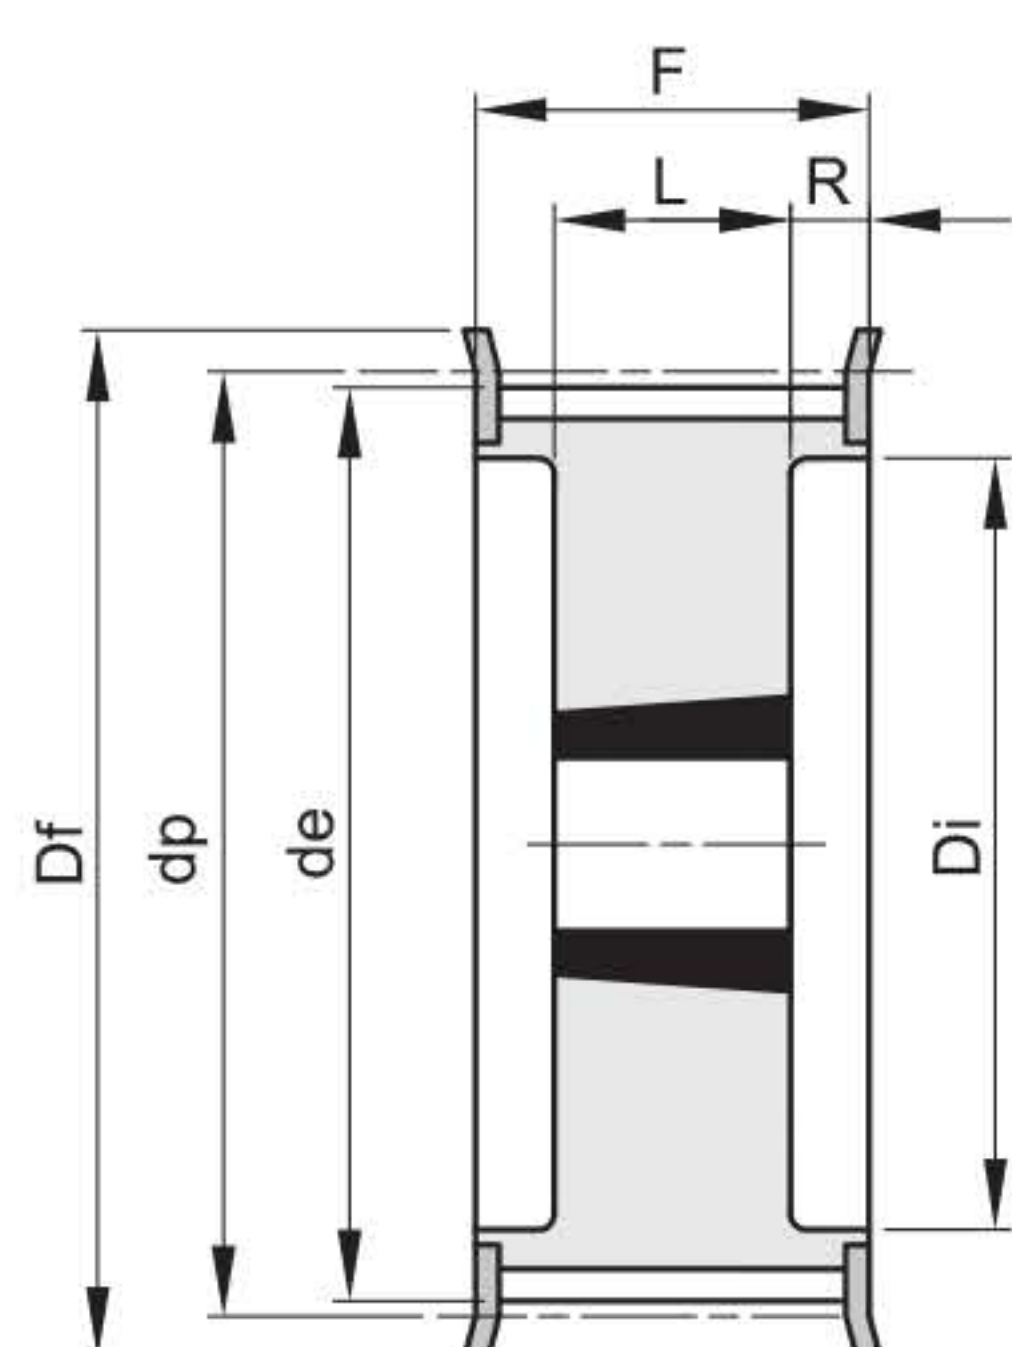

18F

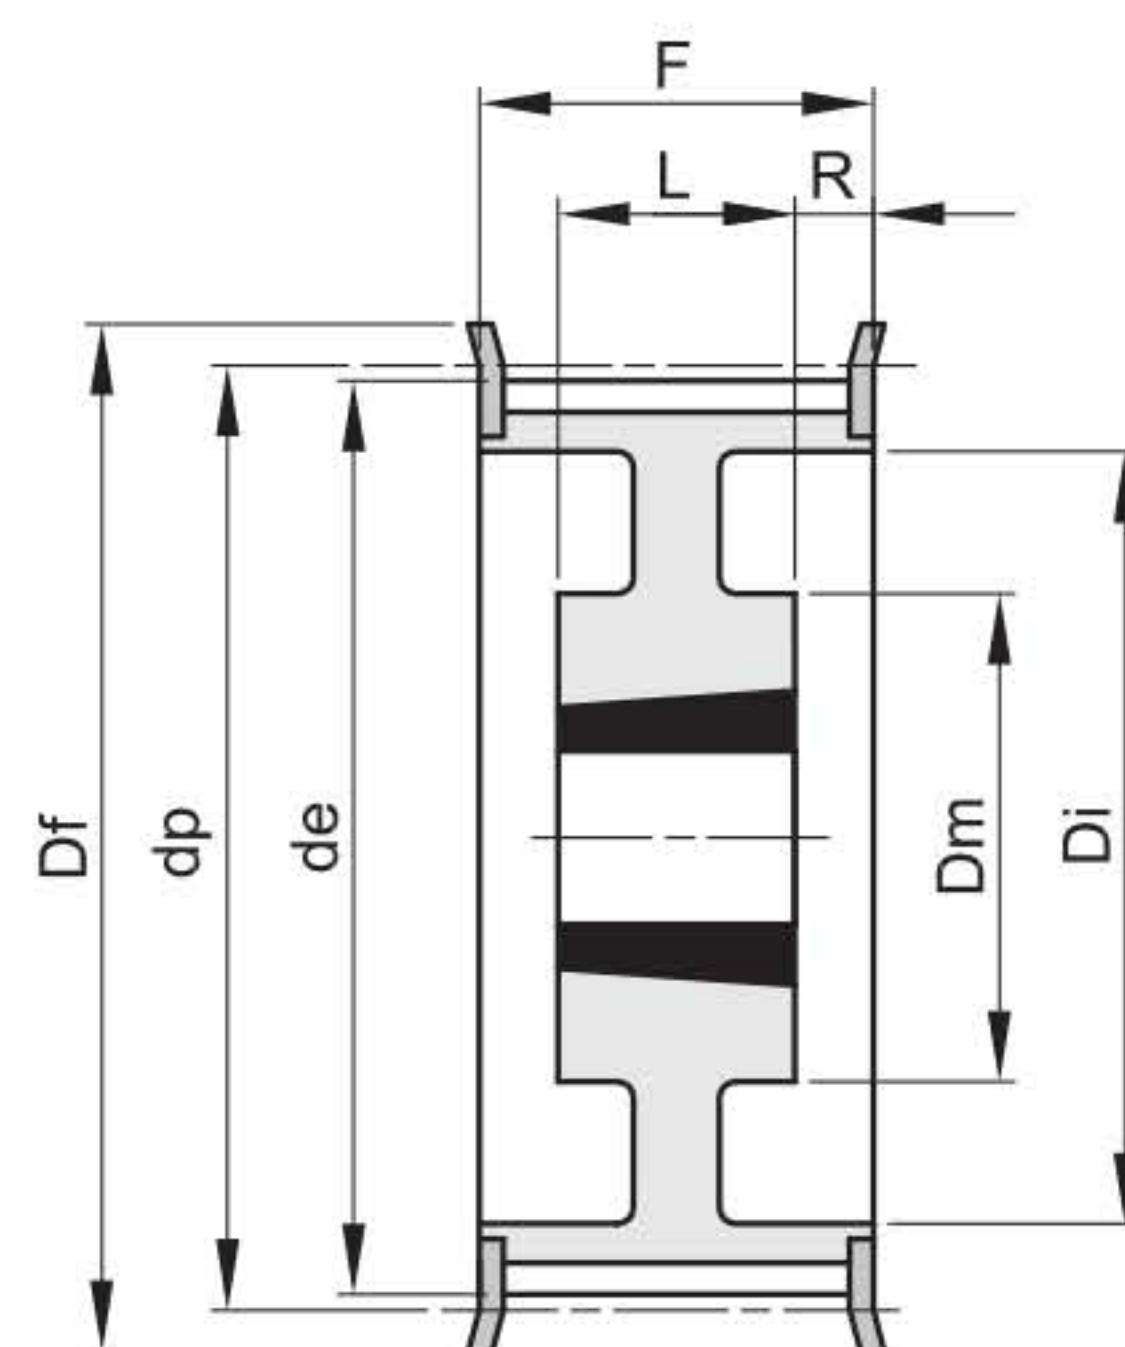

19F

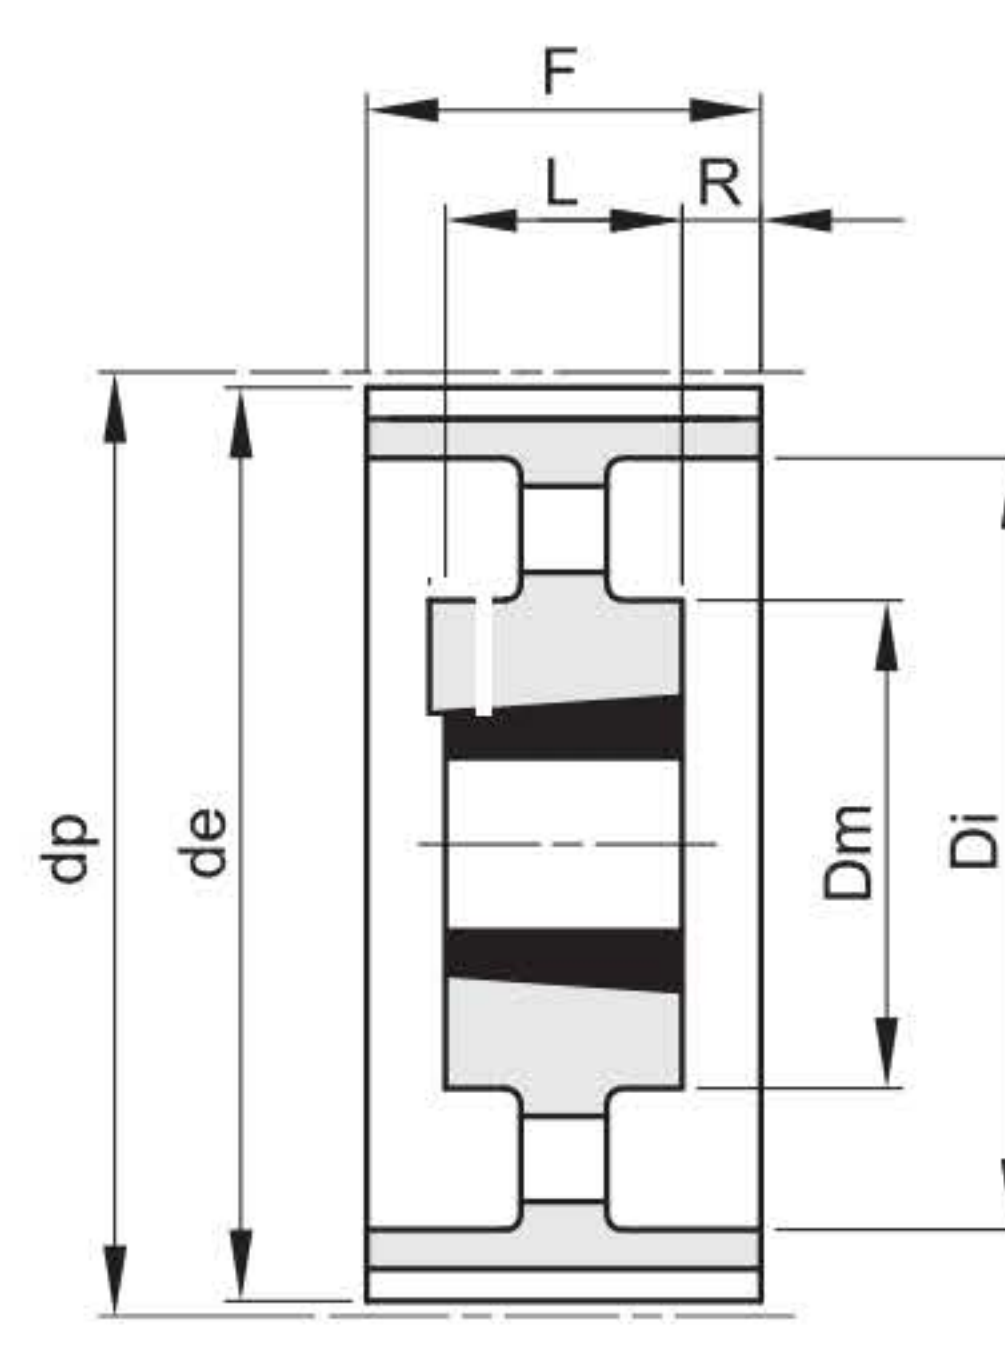


20

codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 20 H 300	18F	St	20	1615	42	80,85	79,48	87		64,5	84,0	38,0	23,0	315	1,22
B 21 H 300	18F	St	21	1615	42	84,89	83,52	91		65	84,0	38,0	23,0	316	1,52
B 22 H 300	18F	St	22	1615	42	88,94	87,56	93		67	84,0	38,0	23,0	317	1,80
B 23 H 300	18F	St	23	1615	42	92,98	91,61	97		70	84,0	38,0	23,0	318	2,04
B 24 H 300	18F	St	24	1615	42	97,02	95,65	103		73,5	84,0	38,0	23,0	320	2,29
B 25 H 300	18F	St	25	1615	42	101,06	99,69	106		77	84,0	38,0	23,0	321	2,54
B 26 H 300	18F	St	26	1615	42	105,11	103,73	111		82	84,0	38,0	23,0	322	2,73
B 27 H 300	18F	St	27	2012	50	109,15	107,78	115		85	84,0	32,0	26,0	323	2,54
B 28 H 300	18F	St	28	2012	50	113,19	111,82	119		90,5	84,0	32,0	26,0	325	2,68
B 30 H 300	18F	St	30	2012	50	121,28	119,90	127		98	84,0	32,0	26,0	327	3,21
B 32 H 300	18F	St	32	2517	60	129,36	127,99	135		106	84,0	45,0	19,5	328	3,58
B 36 H 300	18F	St	36	2517	60	145,53	144,16	152		121	84,0	45,0	19,5	334	4,99
B 40 H 300	18F	St	40	2517	60	161,70	160,33	168		138	84,0	45,0	19,5	338	6,50
B 44 H 300	19F	St	44	2517	60	177,87	176,50	184	119	152	86,0	45,0	20,5	339	7,55
B 48 H 300	19F	St	48	2517	60	194,04	192,67	200	119	169	86,0	45,0	20,5	342	8,66
B 60 H 300	20	GG	60	2517	60	242,55	241,18		119	223	86,0	45,0	20,5		7,42
B 72 H 300	20	GG	72	2517	60	291,06	289,69		119	270	86,0	45,0	20,5		9,33
B 84 H 300	20	GG	84	2517	60	339,57	338,20		119	320	86,0	45,0	20,5		11,19
B 96 H 300	20	GG	96	3030	75	388,08	386,71		150	362	86,0	76,0	5,0		17,96
B 120 H 300	20	GG	120	3030	75	485,10	483,73		150	460	86,0	76,0	5,0		22,23

3M

Passo 3 mm

Per cinghie larghezza 9 mm

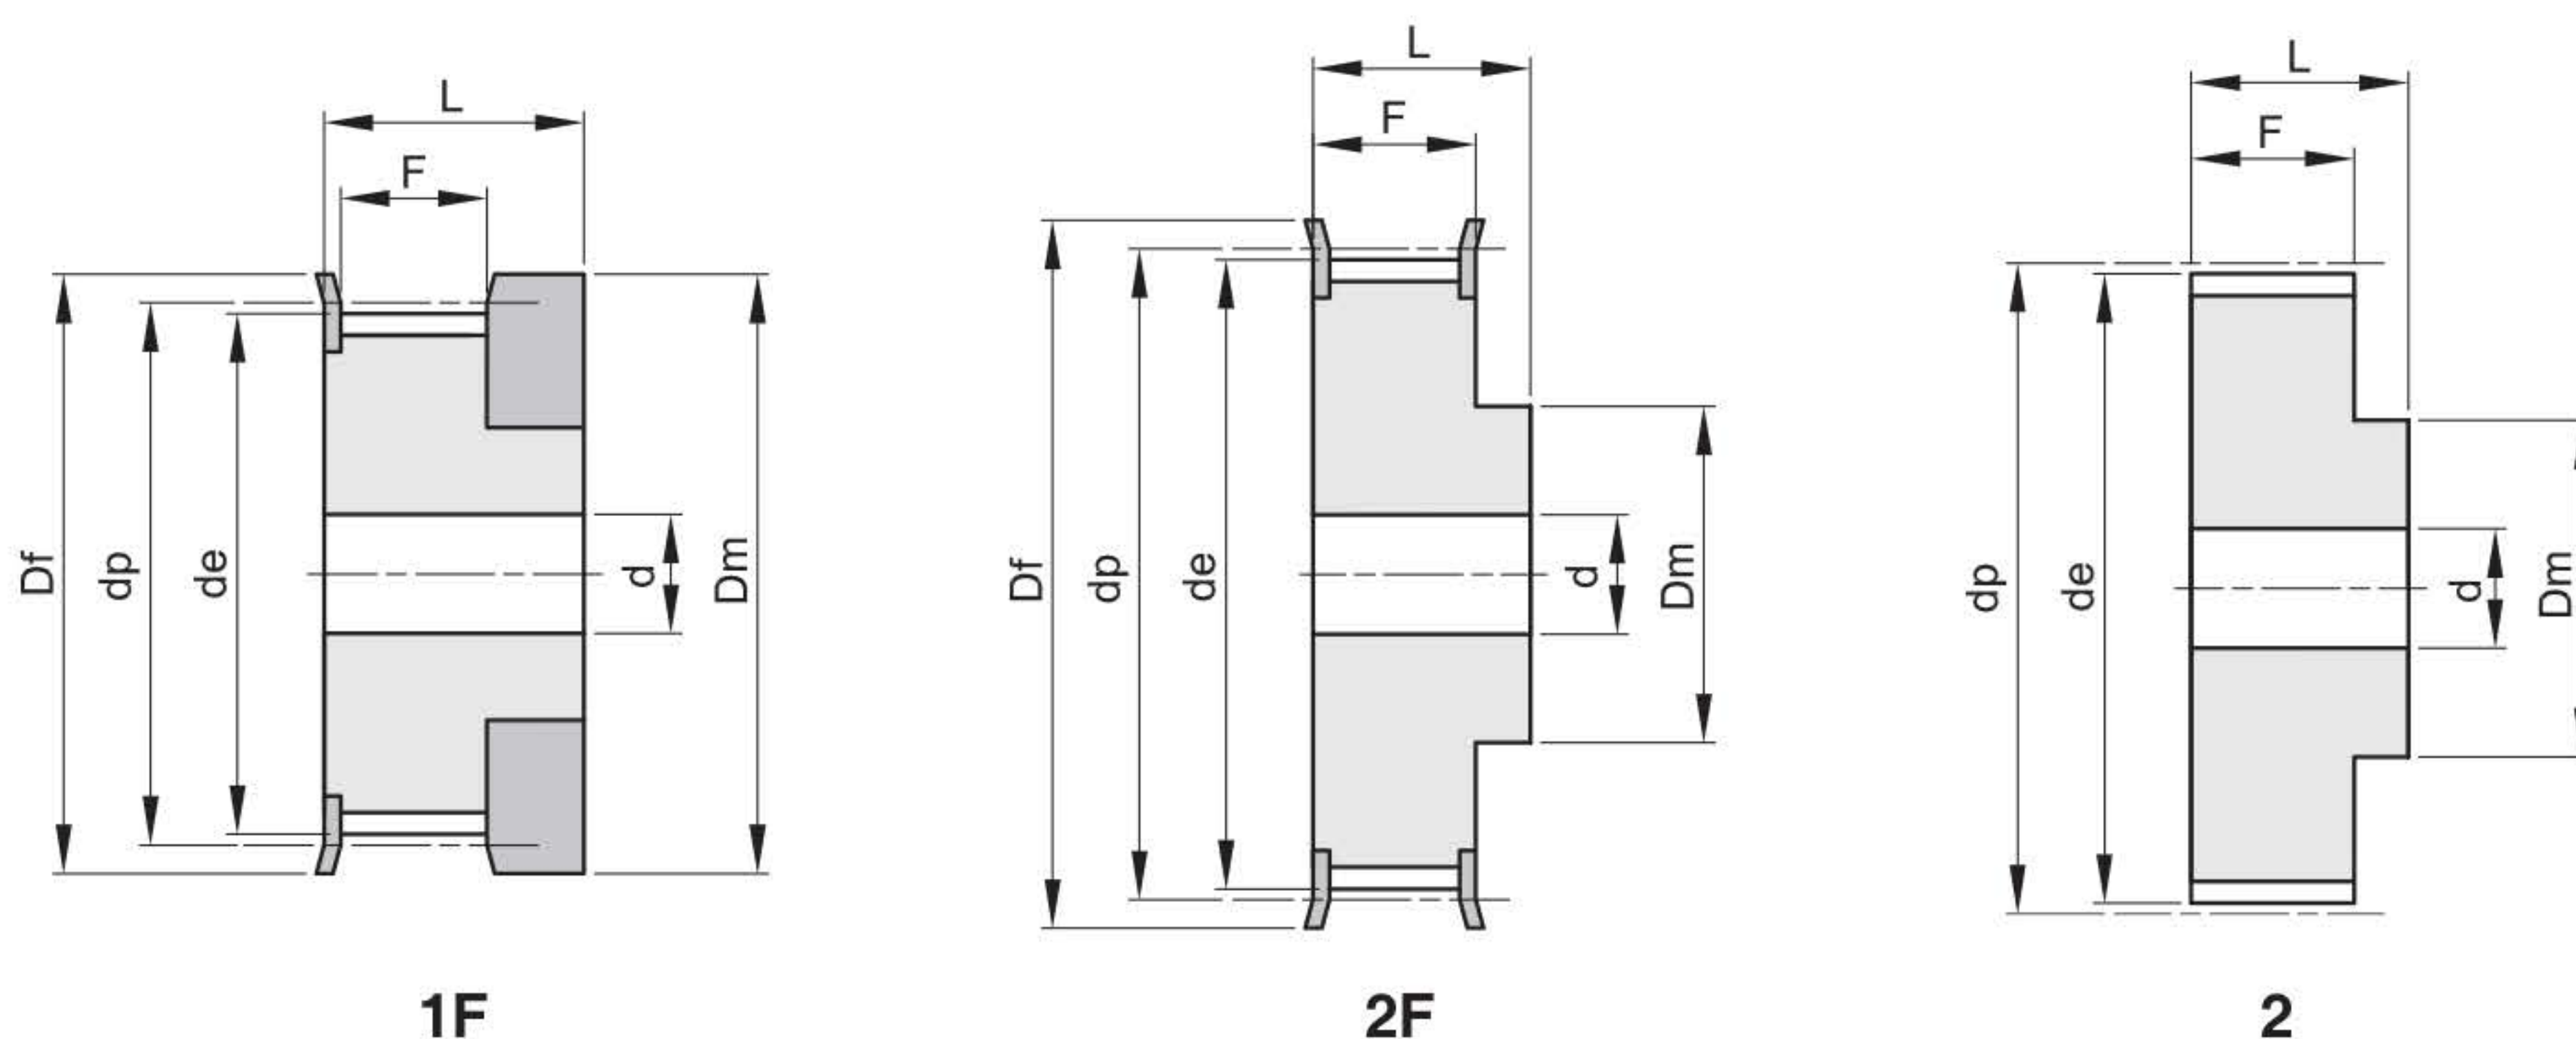


codice	tipo	mat.	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
10 3M 09	1F	Al	10	9,55	8,79	13,0	12,0		10,2	17,5		100	0,01
12 3M 09	1F	Al	12	11,46	10,70	15,0	15,0		10,2	17,5		101	0,01
14 3M 09	1F	Al	14	13,37	12,61	16,0	16,0		10,2	17,5		102	0,01
15 3M 09	1F	Al	15	14,32	13,56	18,0	17,5		10,2	17,5		104	0,01
16 3M 09	2F	Al	16	15,28	14,52	18,0	10,0		12,8	20,6	4	104	0,01
18 3M 09	2F	Al	18	17,19	16,43	19,5	11,0		12,8	20,6	6	105	0,01
20 3M 09	2F	Al	20	19,10	18,34	23,0	13,0		12,8	20,6	6	107	0,01
21 3M 09	2F	Al	21	20,05	19,29	25,0	14,0		12,8	20,6	6	108	0,01
22 3M 09	2F	Al	22	21,01	20,25	25,0	14,0		12,8	20,6	6	108	0,01
24 3M 09	2F	Al	24	22,92	22,16	25,0	14,0		12,8	20,6	6	108	0,02
26 3M 09	2F	Al	26	24,83	24,07	28,0	16,0		12,8	20,6	6	109	0,02
28 3M 09	2F	Al	28	26,74	25,98	32,0	18,0		12,8	20,6	6	110	0,02
30 3M 09	2F	Al	30	28,65	27,89	32,0	20,0		12,8	20,6	6	110	0,03
32 3M 09	2F	Al	32	30,56	29,80	36,0	22,0		12,8	20,6	6	111	0,03
36 3M 09	2F	Al	36	34,38	33,62	38,0	26,0		13,4	22,2	6	112	0,05
40 3M 09	2F	Al	40	38,20	37,44	42,0	28,0		13,4	22,2	6	113	0,06
44 3M 09	2F	Al	44	42,02	41,26	48,0	33,0		13,4	22,2	6	114	0,07
48 3M 09	2	Al	48	45,84	45,08		33,0		13,4	22,2	8		0,11
60 3M 09	2	Al	60	57,30	56,54		33,0		13,4	22,2	8		0,11
72 3M 09	2	Al	72	68,76	68,00		33,0		13,4	22,2	8		0,15

3M

Passo 3 mm

Per cinghie larghezza 15 mm

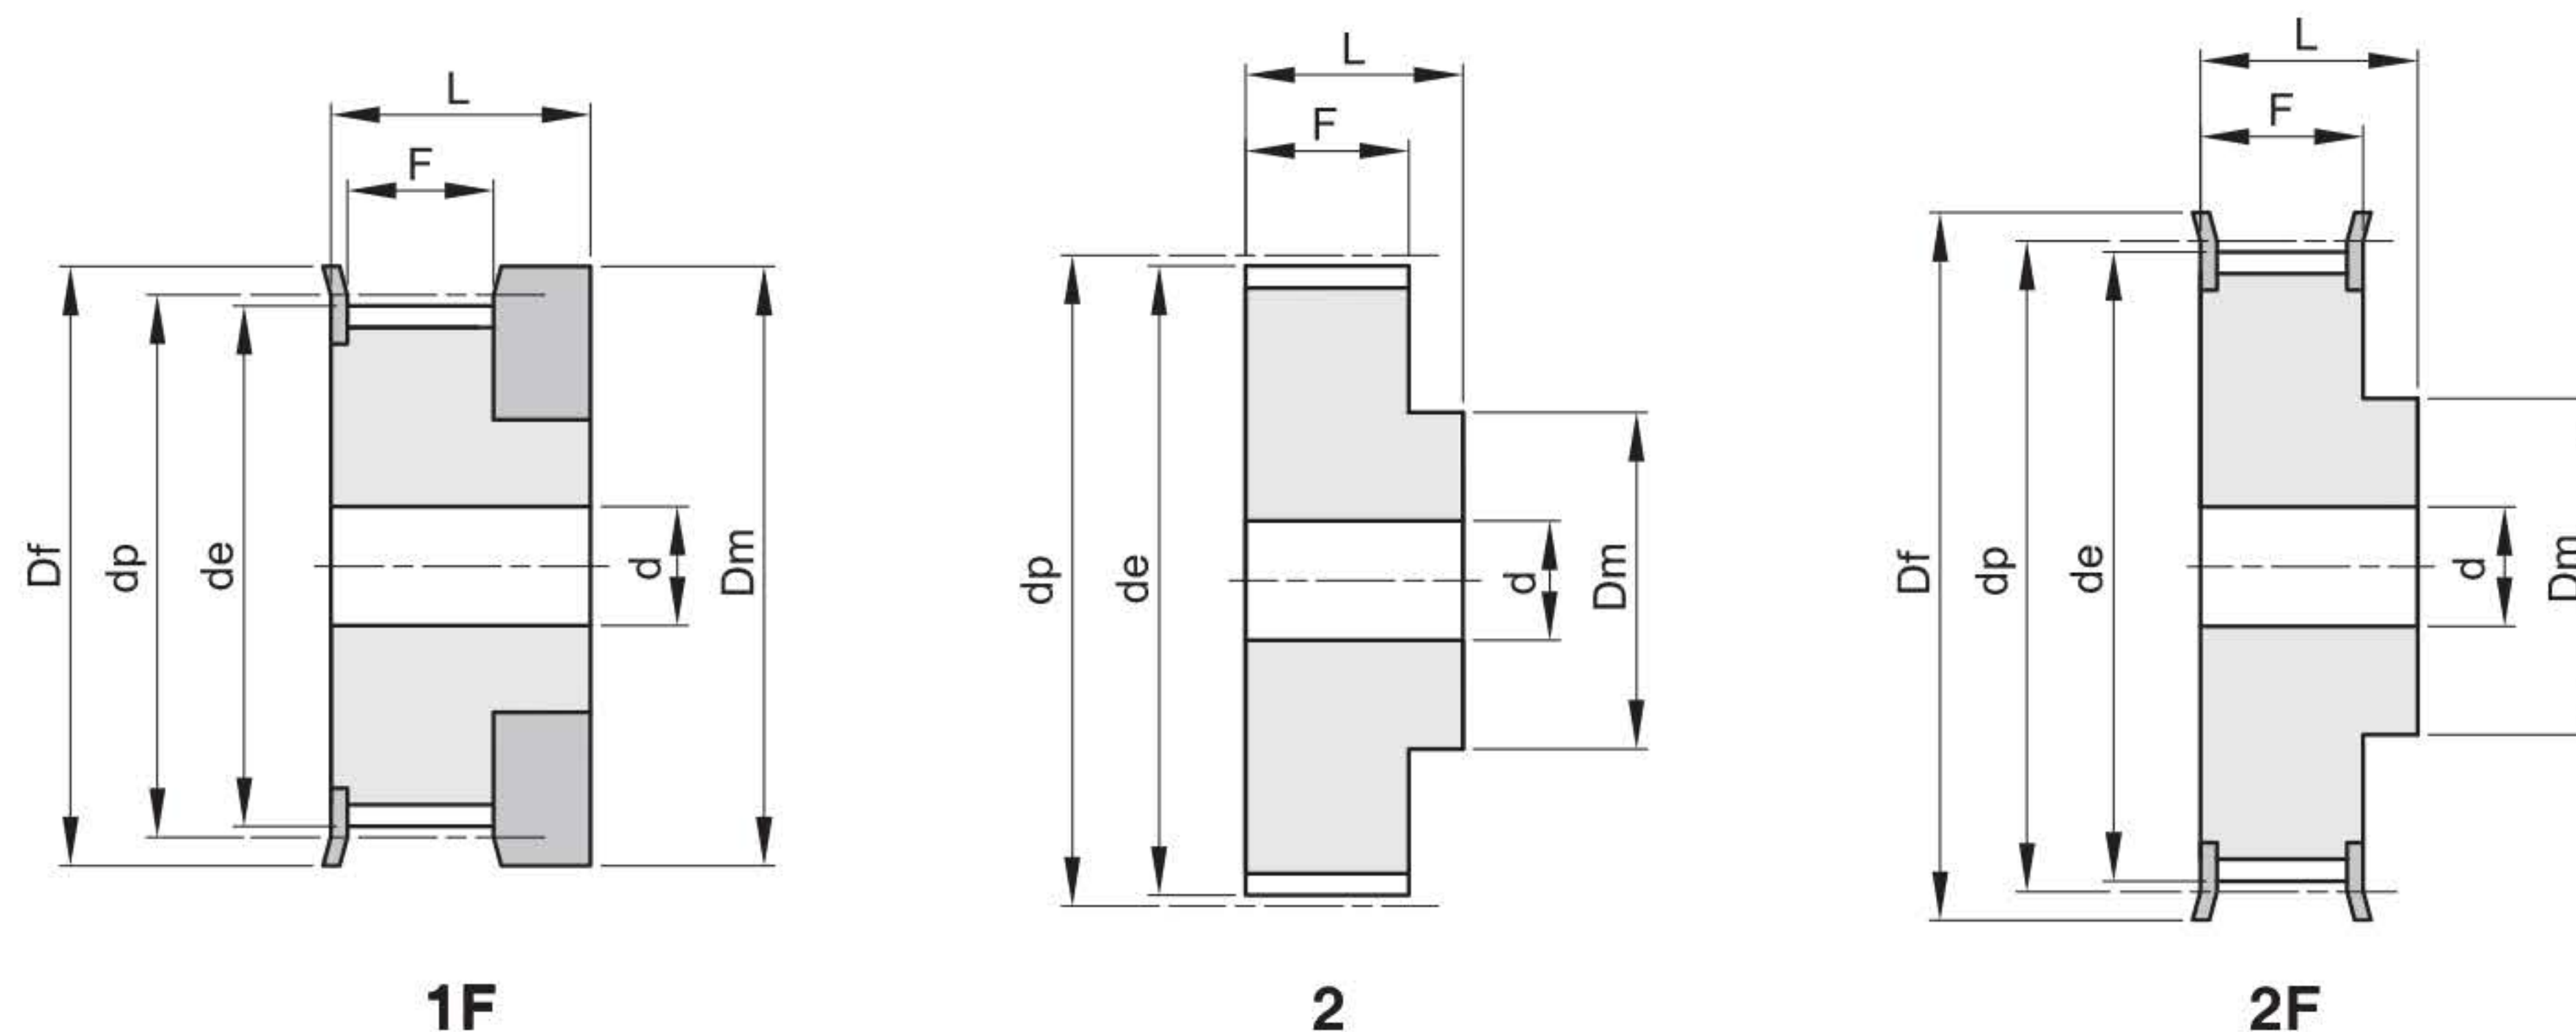


codice	tipo	mat.	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
10 3M 15	1F	Al	10	9,55	8,79	13,0	12,0		17,0	26,0		100	0,01
12 3M 15	1F	Al	12	11,46	10,70	15,0	15,0		17,0	26,0		101	0,01
14 3M 15	1F	Al	14	13,37	12,61	16,0	16,0		17,0	26,0		102	0,01
15 3M 15	1F	Al	15	14,32	13,56	18,0	17,5		17,0	26,0		104	0,01
16 3M 15	2F	Al	16	15,28	14,52	18,0	10,0		19,5	26,0	4	104	0,01
18 3M 15	2F	Al	18	17,19	16,43	19,5	11,0		19,5	26,0	6	105	0,01
20 3M 15	2F	Al	20	19,10	18,34	23,0	13,0		19,5	26,0	6	107	0,01
21 3M 15	2F	Al	21	20,05	19,29	25,0	14,0		19,5	26,0	6	108	0,02
22 3M 15	2F	Al	22	21,01	20,25	25,0	14,0		19,5	26,0	6	108	0,02
24 3M 15	2F	Al	24	22,92	22,16	25,0	14,0		19,5	26,0	6	108	0,02
26 3M 15	2F	Al	26	24,83	24,07	28,0	16,0		19,5	26,0	6	109	0,03
28 3M 15	2F	Al	28	26,74	25,98	32,0	18,0		19,5	26,0	6	110	0,03
30 3M 15	2F	Al	30	28,65	27,89	32,0	20,0		19,5	26,0	6	110	0,04
32 3M 15	2F	Al	32	30,56	29,80	36,0	22,0		19,5	26,0	6	111	0,04
36 3M 15	2F	Al	36	34,38	33,62	38,0	26,0		20,0	30,0	6	112	0,06
40 3M 15	2F	Al	40	38,20	37,44	42,0	28,0		20,0	30,0	6	113	0,08
44 3M 15	2F	Al	44	42,02	41,26	48,0	33,0		20,0	30,0	6	114	0,10
48 3M 15	2	Al	48	45,84	45,08		33,0		20,0	30,0	8		0,10
60 3M 15	2	Al	60	57,30	56,54		33,0		20,0	30,0	8		0,15
72 3M 15	2	Al	72	68,76	68,00		33,0		20,0	30,0	8		0,21


5M

Passo 5 mm

Per cinghie larghezza 9 mm

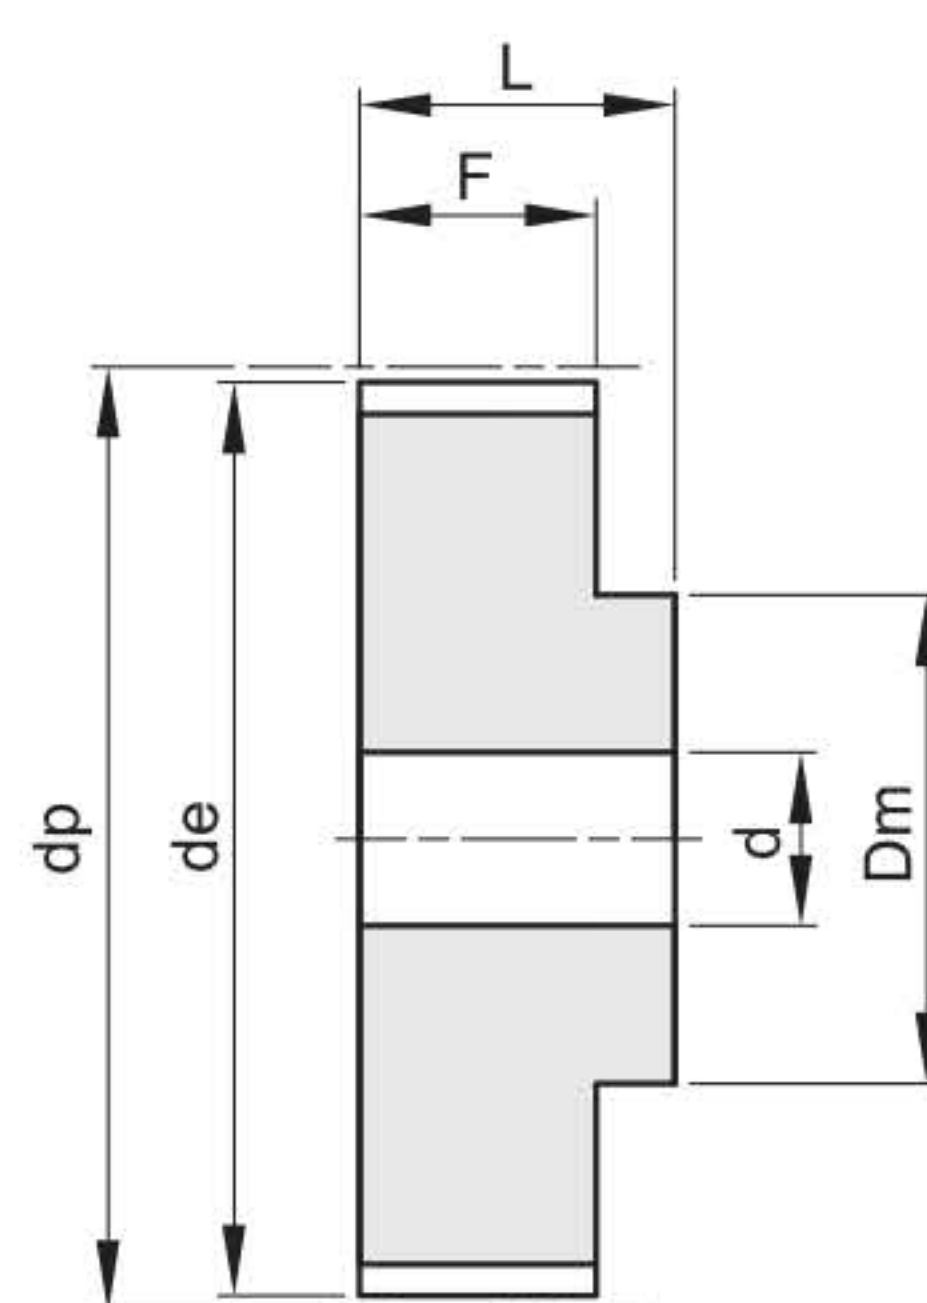

2

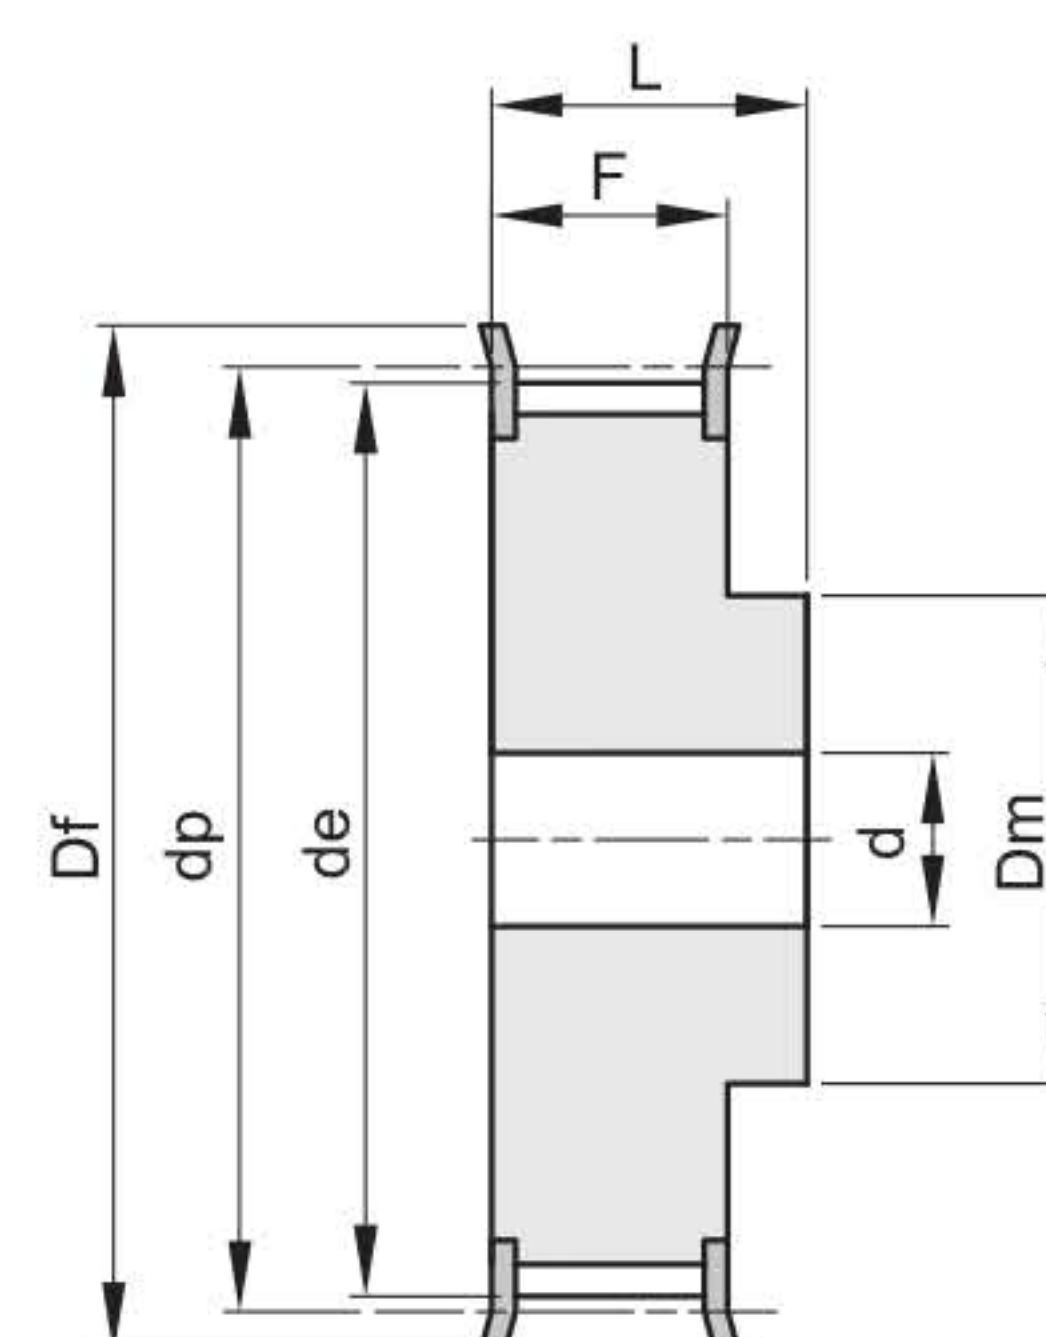


2F

codice	tipo	mat.	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
12 5M 09	2F	St	12	19,10	17,96	23	12,5		14,5	20,0	6	202	0,03
14 5M 09	2F	St	14	22,28	21,14	25	13,5		14,5	20,0	6	203	0,04
15 5M 09	2F	St	15	23,87	22,73	28	16,0		14,5	20,0	6	204	0,05
16 5M 09	2F	St	16	25,46	24,32	28	16,5		14,5	20,0	6	204	0,06
18 5M 09	2F	St	18	28,65	27,51	32	20,0		14,5	20,0	6	205	0,07
20 5M 09	2F	St	20	31,83	30,69	36	23,0		14,5	22,5	6	206	0,10
21 5M 09	2F	St	21	33,42	32,28	38	24,0		14,5	22,5	6	207	0,12
22 5M 09	2F	St	22	35,01	33,87	38	25,5		14,5	22,5	6	207	0,13
24 5M 09	2F	St	24	38,20	37,06	42	27,0		14,5	22,5	6	208	0,15
26 5M 09	2F	St	26	41,38	40,24	44	30,0		14,5	22,5	6	209	0,18
28 5M 09	2F	St	28	44,56	43,42	48	30,5		14,5	22,5	6	210	0,21
30 5M 09	2F	St	30	47,75	46,60	51	35,0		14,5	22,5	6	211	0,25
32 5M 09	2F	St	32	50,93	49,79	54	38,0		14,5	22,5	8	212	0,28
36 5M 09	2F	St	36	57,30	56,16	60	38,0		14,5	22,5	8	214	0,33
40 5M 09	2F	St	40	63,66	62,52	71	38,0		14,5	22,5	8	217	0,42
44 5M 09	2	Al	44	70,03	68,89		38,0		14,5	25,5	8		0,17
48 5M 09	2	Al	48	76,39	75,25		45,0		14,5	25,5	8		0,18
60 5M 09	2	Al	60	95,49	94,35		45,0		14,5	25,5	8		0,23
72 5M 09	2	Al	72	114,59	113,45		45,0		14,5	25,5	8		0,42


5M

Passo 5 mm

Per cinghie larghezza 15 mm

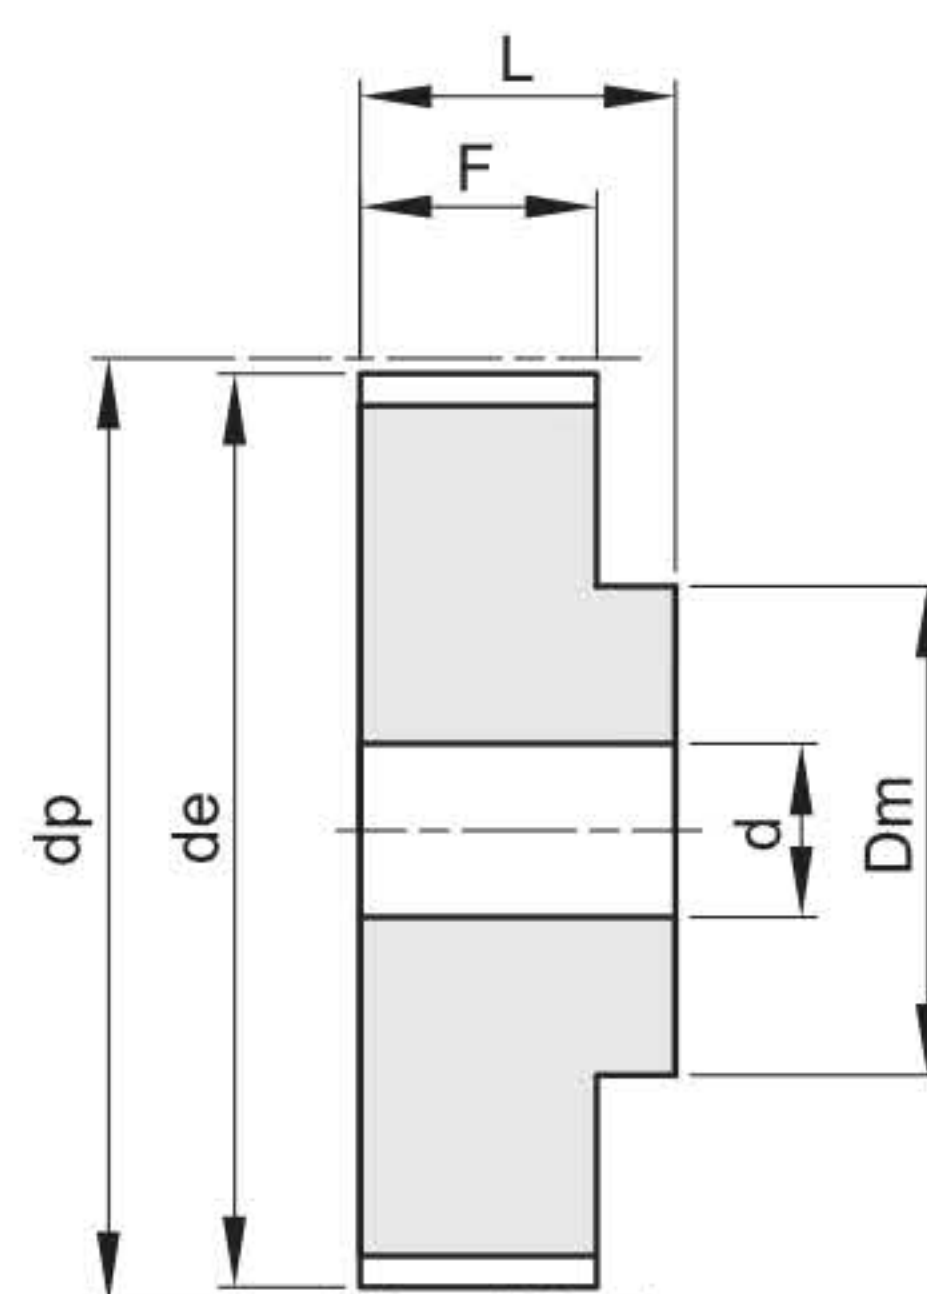

2

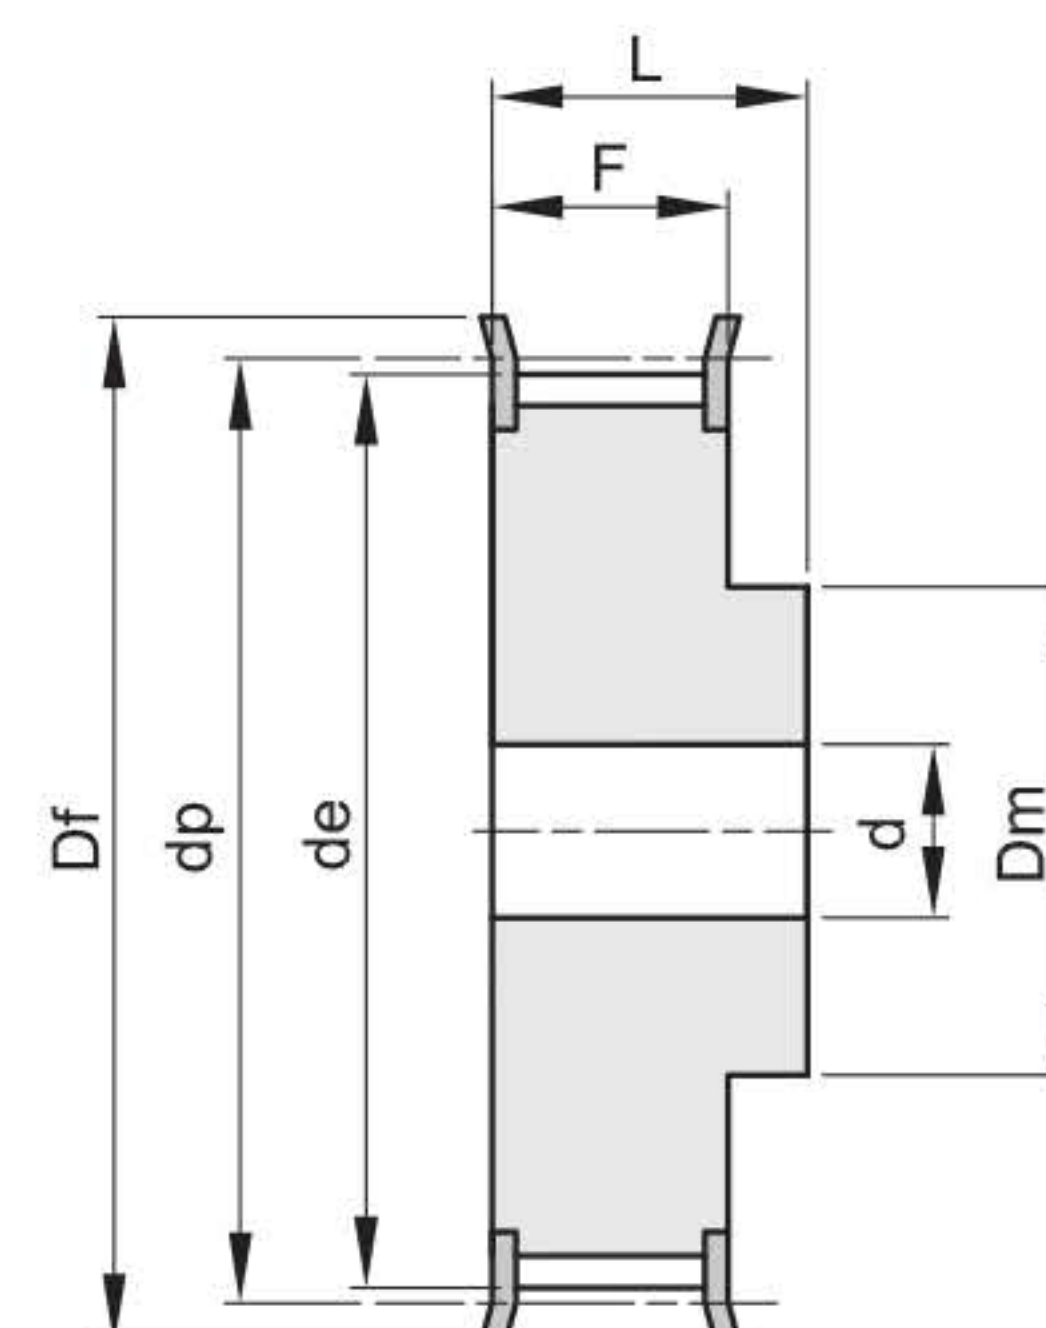


2F

codice	tipo	mat.	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
12 5M 15	2F	St	12	19,10	17,96	23	12,5		20,5	26	6	202	0,03
14 5M 15	2F	St	14	22,28	21,14	25	13,5		20,5	26	6	203	0,04
15 5M 15	2F	St	15	23,87	22,73	28	16,0		20,5	26	6	204	0,05
16 5M 15	2F	St	16	25,46	24,32	28	16,5		20,5	26	6	204	0,06
18 5M 15	2F	St	18	28,65	27,51	32	20,0		20,5	26	6	205	0,09
20 5M 15	2F	St	20	31,83	30,69	36	23,0		20,5	26	6	206	0,12
21 5M 15	2F	St	21	33,42	32,28	38	24,0		20,5	26	6	207	0,14
22 5M 15	2F	St	22	35,01	33,87	38	25,5		20,5	26	6	207	0,15
24 5M 15	2F	St	24	38,20	37,06	42	27,0		20,5	28	6	208	0,19
26 5M 15	2F	St	26	41,38	40,24	44	30,0		20,5	28	6	209	0,23
28 5M 15	2F	St	28	44,56	43,42	48	30,5		20,5	28	6	210	0,26
30 5M 15	2F	St	30	47,75	46,60	51	35,0		20,5	28	6	211	0,32
32 5M 15	2F	St	32	50,93	49,79	54	38,0		20,5	28	8	212	0,35
36 5M 15	2F	St	36	57,30	56,16	60	38,0		20,5	28	8	214	0,43
40 5M 15	2F	St	40	63,66	62,52	71	38,0		20,5	28	8	217	0,52
44 5M 15	2	Al	44	70,03	68,89		38,0		20,5	30	8		0,23
48 5M 15	2	Al	48	76,39	75,25		38,0		20,5	30	8		0,29
60 5M 15	2	Al	60	95,49	94,35		50,0		20,5	30	8		0,30
72 5M 15	2	Al	72	114,59	113,45		50,0		20,5	30	8		0,59


5M

Passo 5 mm

Per cinghie larghezza 25 mm

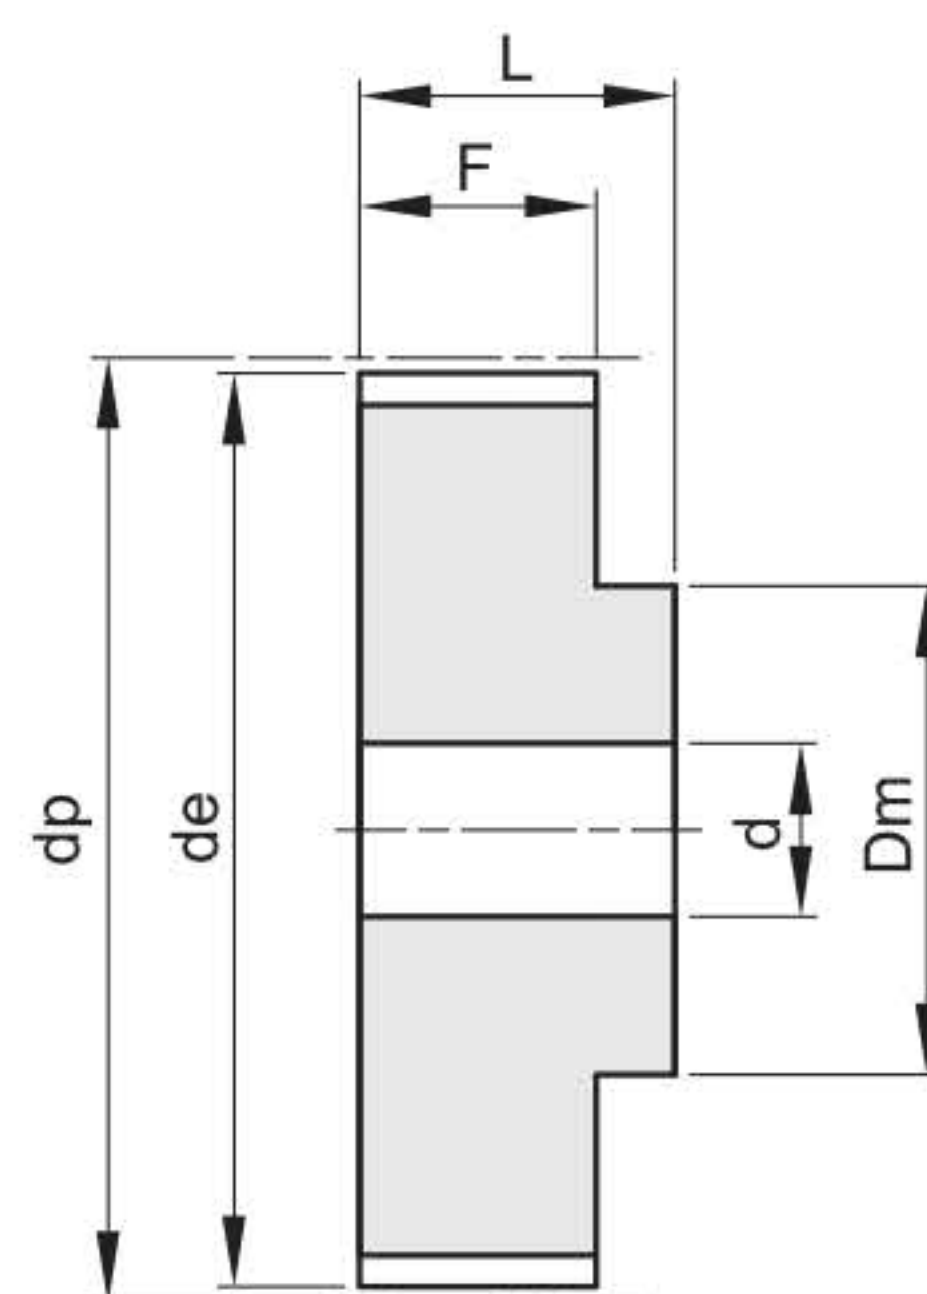

2

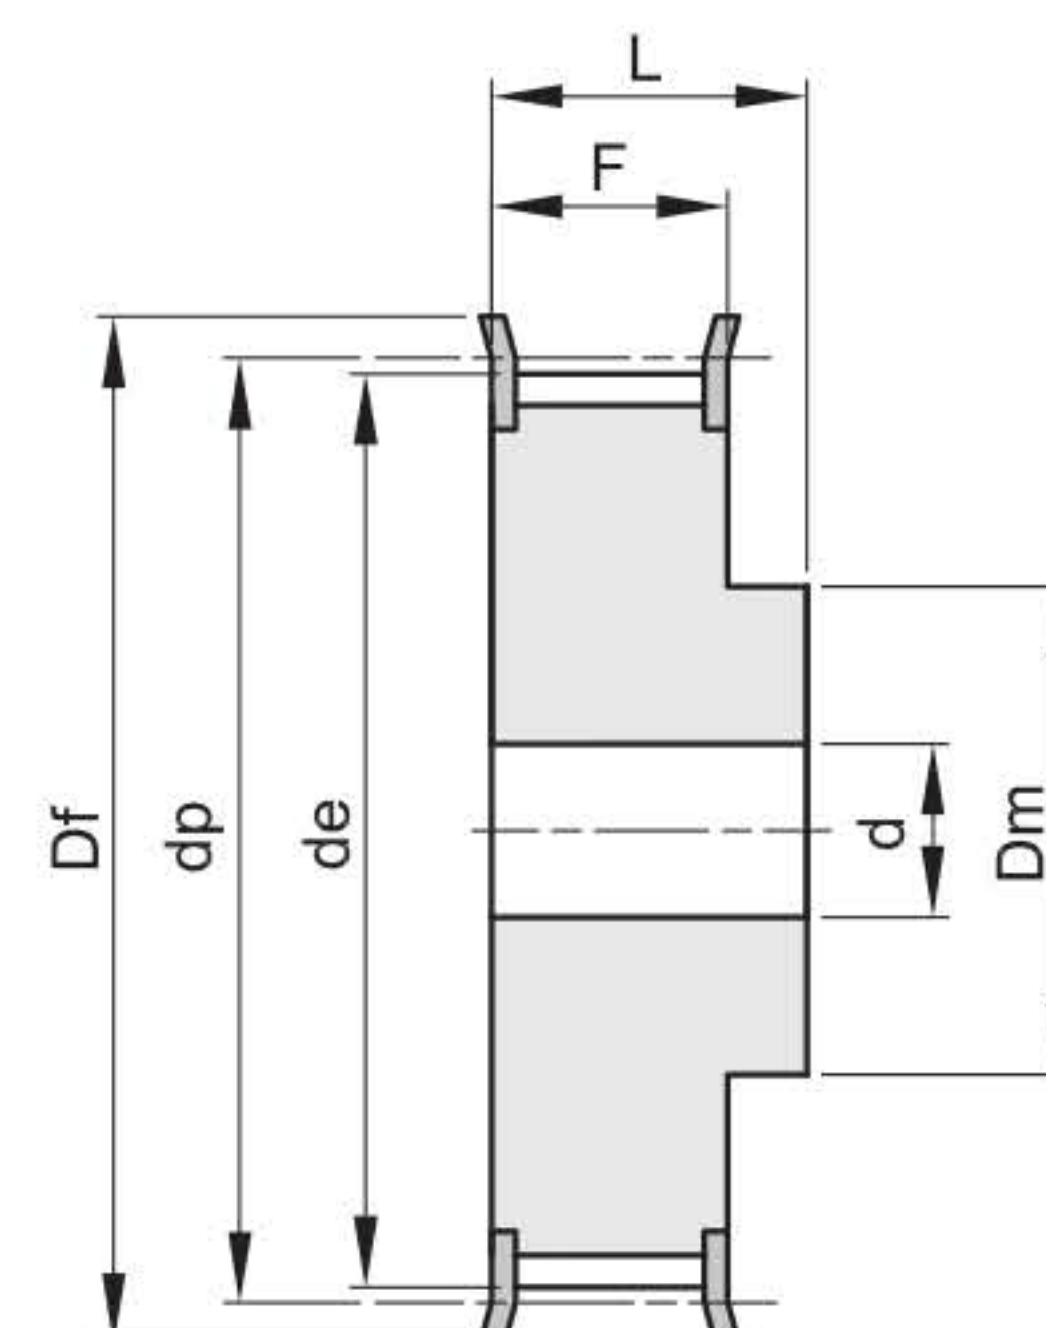


2F

codice	tipo	mat.	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
12 5M 25	2F	St	12	19,10	17,96	23	12,5		30,5	36	6	202	0,05
14 5M 25	2F	St	14	22,28	21,14	25	13,5		30,5	36	6	203	0,08
15 5M 25	2F	St	15	23,87	22,73	28	16,0		30,5	36	6	204	0,09
16 5M 25	2F	St	16	25,46	24,32	28	16,5		30,5	36	6	204	0,11
18 5M 25	2F	St	18	28,65	27,51	32	20,0		30,5	36	6	205	0,13
20 5M 25	2F	St	20	31,83	30,69	36	23,0		30,5	36	6	206	0,17
21 5M 25	2F	St	21	33,42	32,28	38	24,0		30,5	38	6	207	0,20
22 5M 25	2F	St	22	35,01	33,87	38	25,5		30,5	38	6	207	0,22
24 5M 25	2F	St	24	38,20	37,06	42	27,0		30,5	38	6	208	0,26
26 5M 25	2F	St	26	41,38	40,24	44	30,0		30,5	38	6	209	0,32
28 5M 25	2F	St	28	44,56	43,42	48	30,5		30,5	38	6	210	0,37
30 5M 25	2F	St	30	47,75	46,60	51	35,0		30,5	38	6	211	0,42
32 5M 25	2F	St	32	50,93	49,79	54	38,0		30,5	38	8	212	0,48
36 5M 25	2F	St	36	57,30	56,16	60	38,0		30,5	38	8	214	0,59
40 5M 25	2F	St	40	63,66	62,52	71	38,0		30,5	38	8	217	0,75
44 5M 25	2	Al	44	70,03	68,89		38,0		30,5	40	8		0,32
48 5M 25	2	Al	48	76,39	75,25		38,0		30,5	40	8		0,28
60 5M 25	2	Al	60	95,49	94,35		50,0		30,5	40	8		0,44
72 5M 25	2	Al	72	114,59	113,45		50,0		30,5	40	8		0,85


8M

Passo 8 mm


Per cinghie larghezza 20 mm

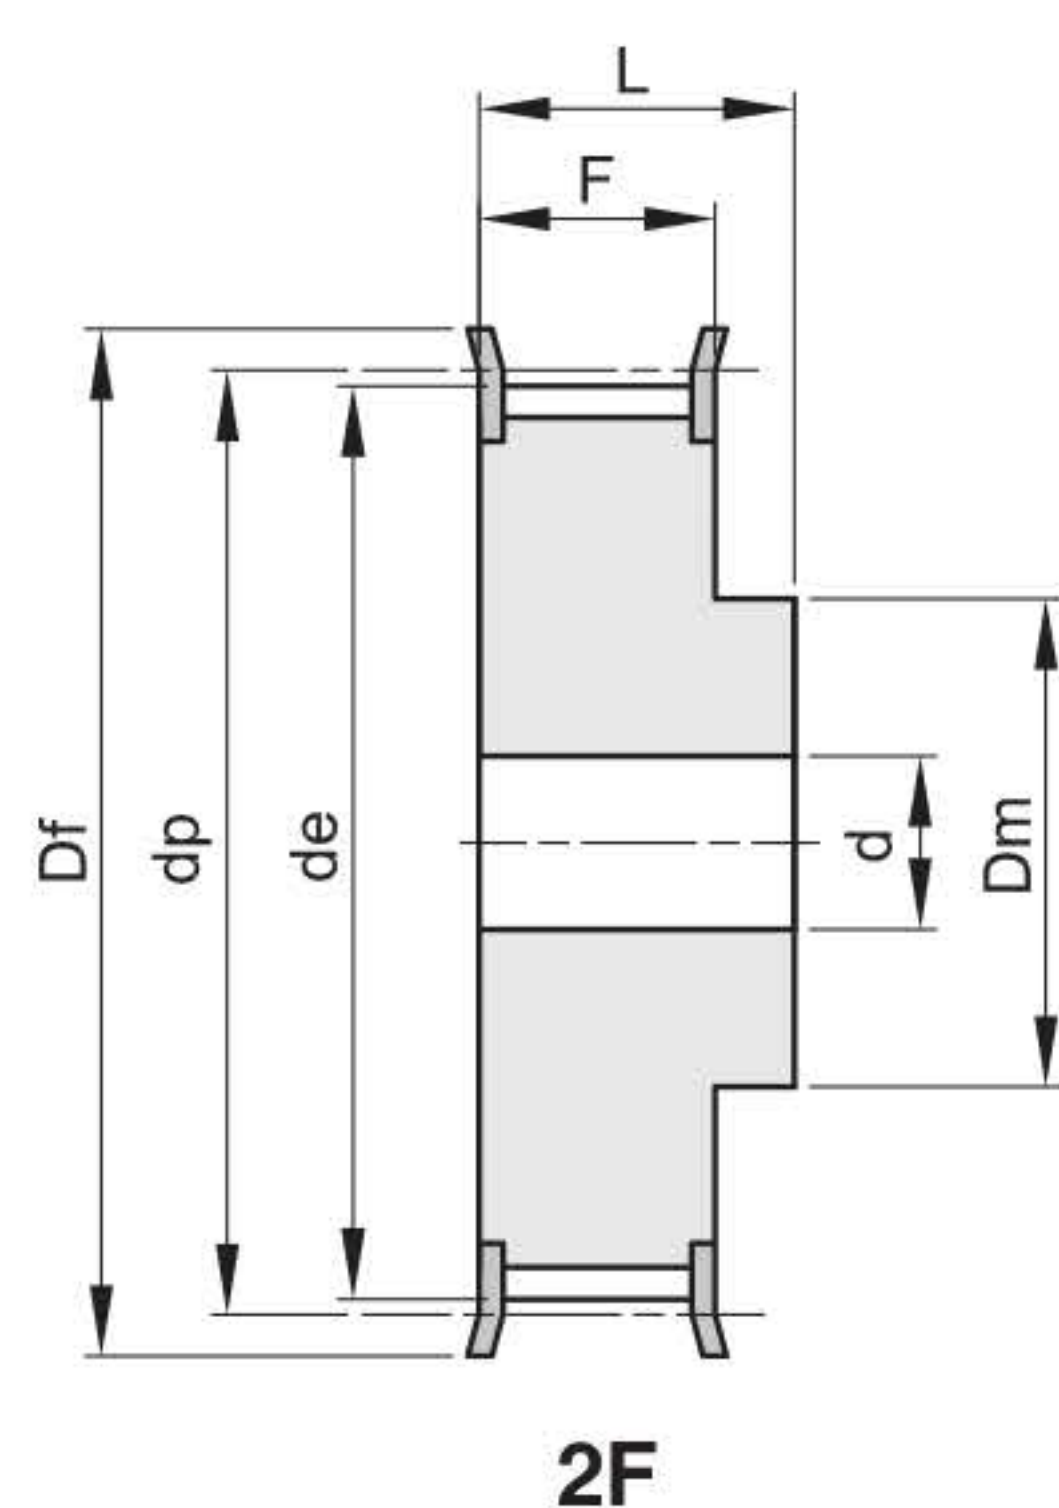


2F

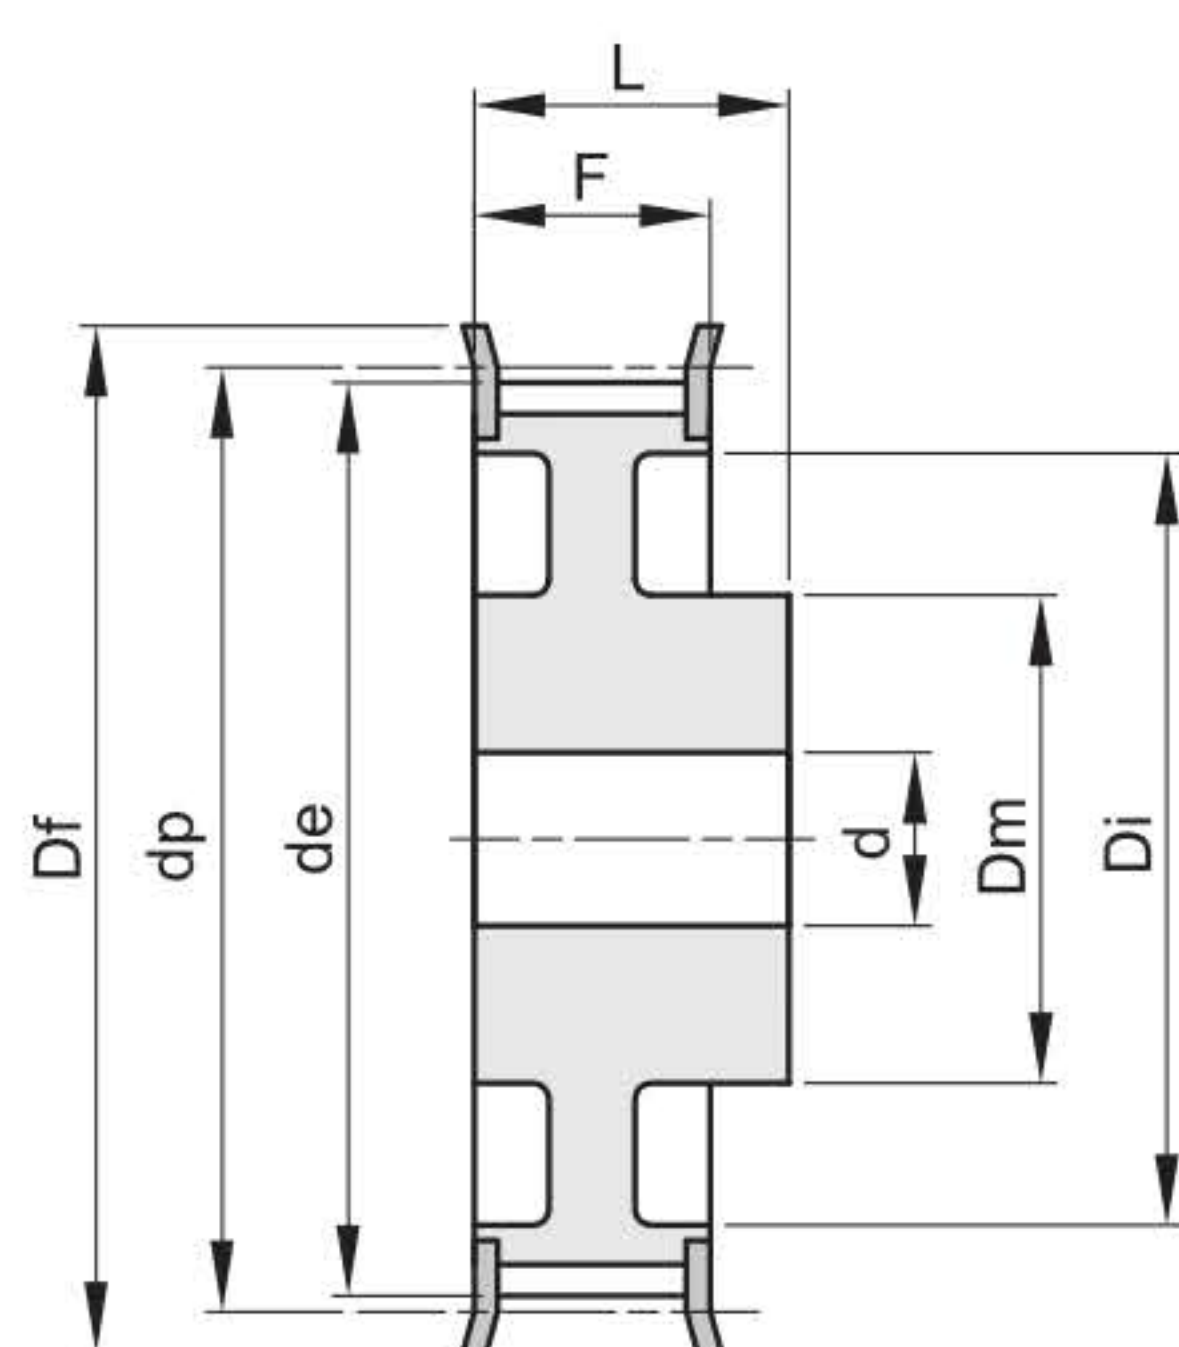

3F

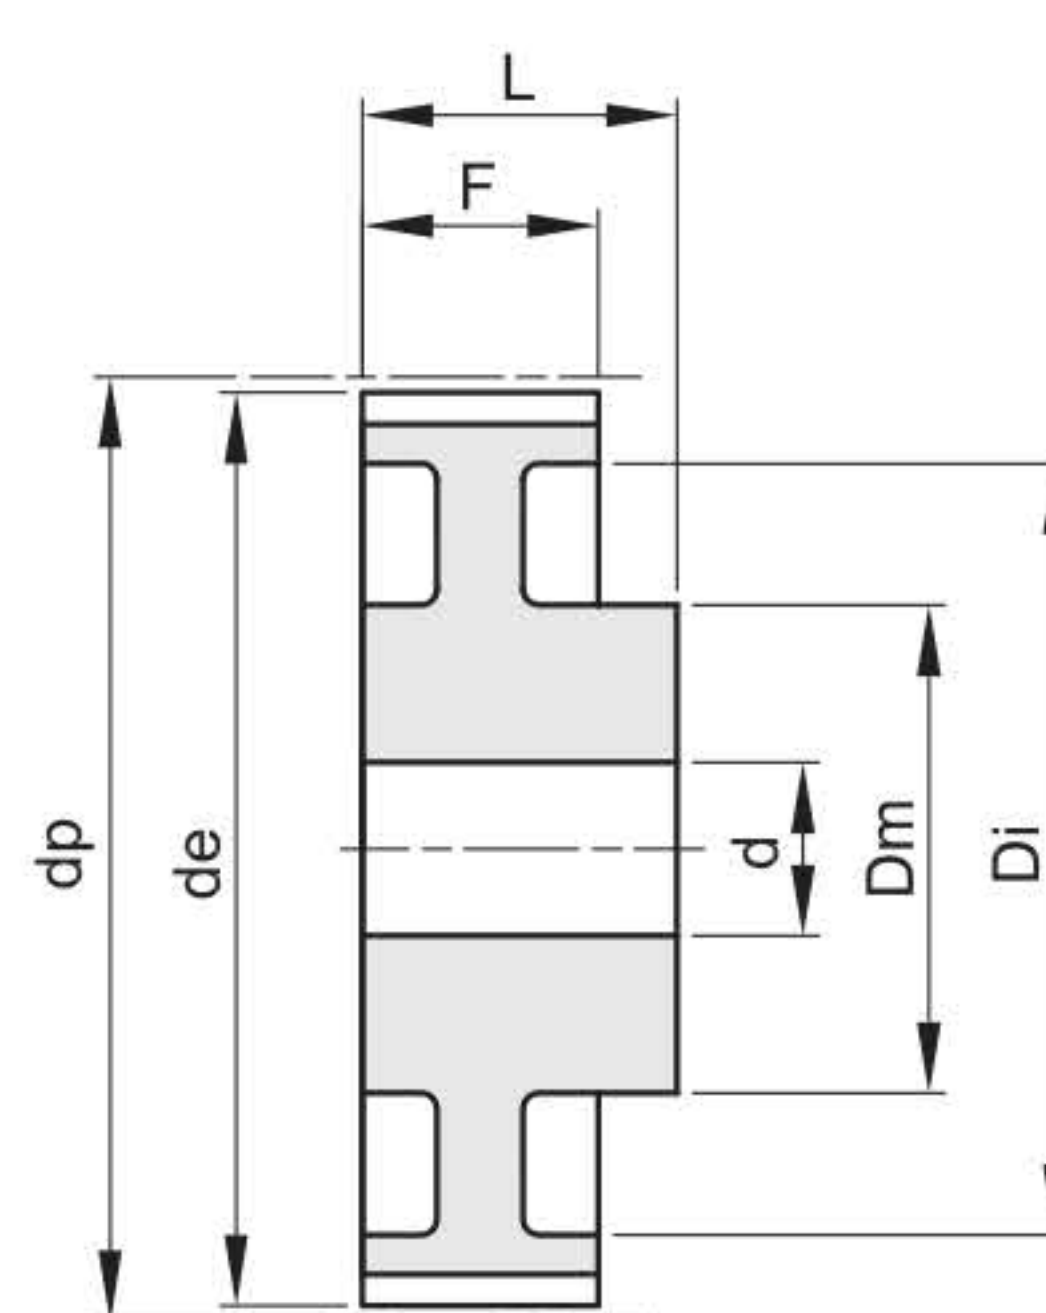

3

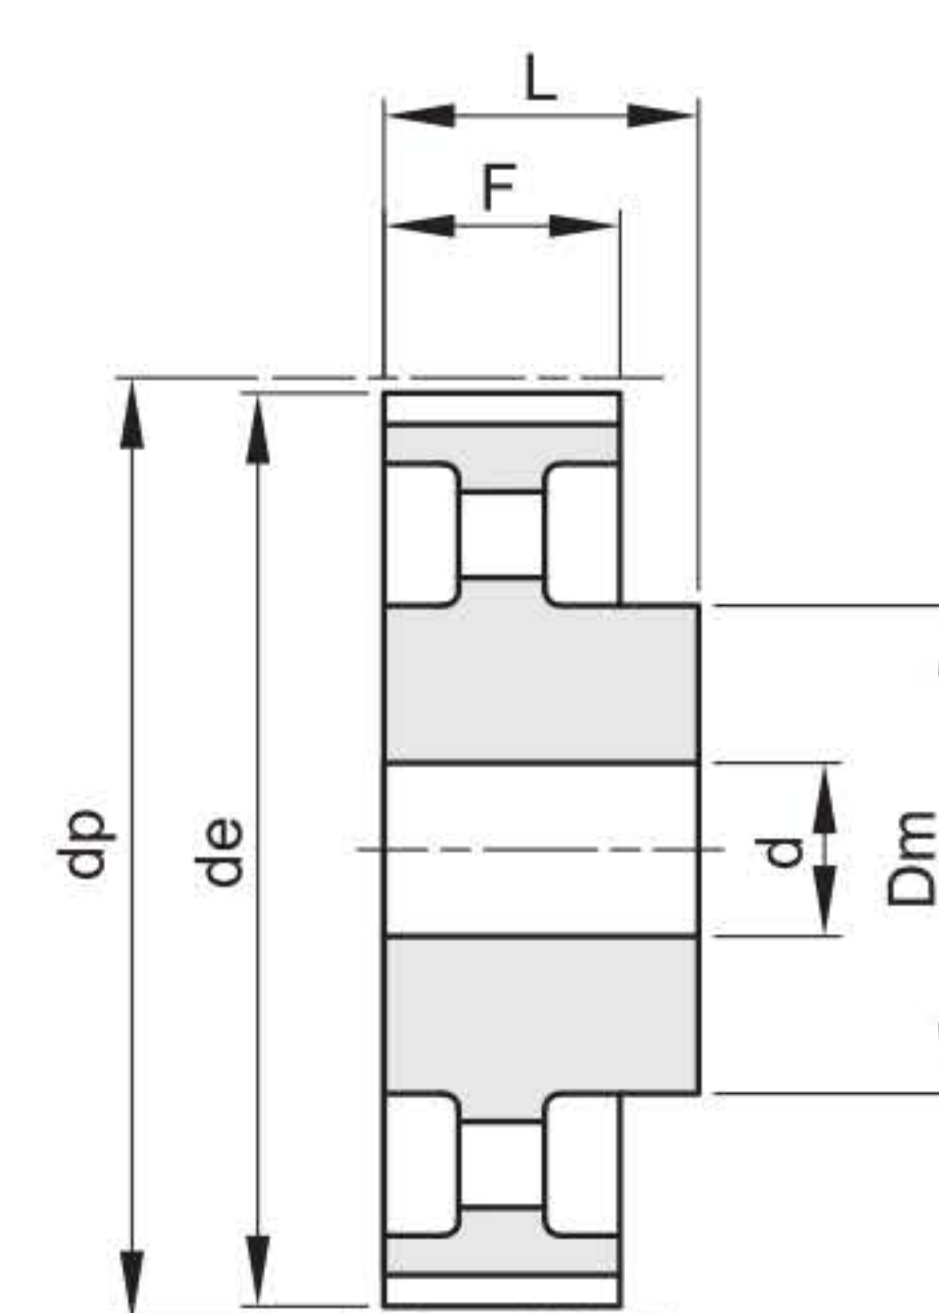


4

codice	tipo	mat.	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
22 8M 20	2F	St	22	56,02	54,65	60	43		28	38	12	308	0,54
24 8M 20	2F	St	24	61,11	59,74	66	45		28	38	12	310	0,65
26 8M 20	2F	St	26	66,21	64,84	71	48		28	38	12	311	0,80
28 8M 20	2F	St	28	71,30	70,08	75	50		28	38	14	312	0,88
30 8M 20	2F	St	30	76,39	75,13	83	55		28	38	14	314	1,00
32 8M 20	2F	St	32	81,49	80,16	87	60		28	38	14	315	1,20
34 8M 20	2F	St	34	86,58	85,21	91	66		28	38	14	316	1,40
36 8M 20	2F	St	36	91,67	90,30	98	70		28	38	14	319	1,60
38 8M 20	2F	St	38	96,77	95,39	103	75		28	38	14	320	1,70
40 8M 20	2F	St	40	101,86	100,49	106	75		28	38	14	321	1,85
44 8M 20	2F	St	44	112,05	110,67	119	75		28	38	14	325	2,10
48 8M 20	2F	St	48	122,23	120,86	127	75		28	38	14	327	2,50
56 8M 20	3F	St	56	142,60	141,23	148	80	116	28	38	14	333	2,82
64 8M 20	3F	St	64	162,97	161,60	168	80	137	28	38	14	338	3,22
72 8M 20	3F	St	72	183,35	181,97	192	80	158	28	38	14	340	3,74
80 8M 20	3	GG	80	203,72	202,35		90	180	28	38	14		3,78
90 8M 20	3	GG	90	229,18	227,81		90	204	28	38	14		4,57

8M

Passo 8 mm

Per cinghie larghezza 30 mm

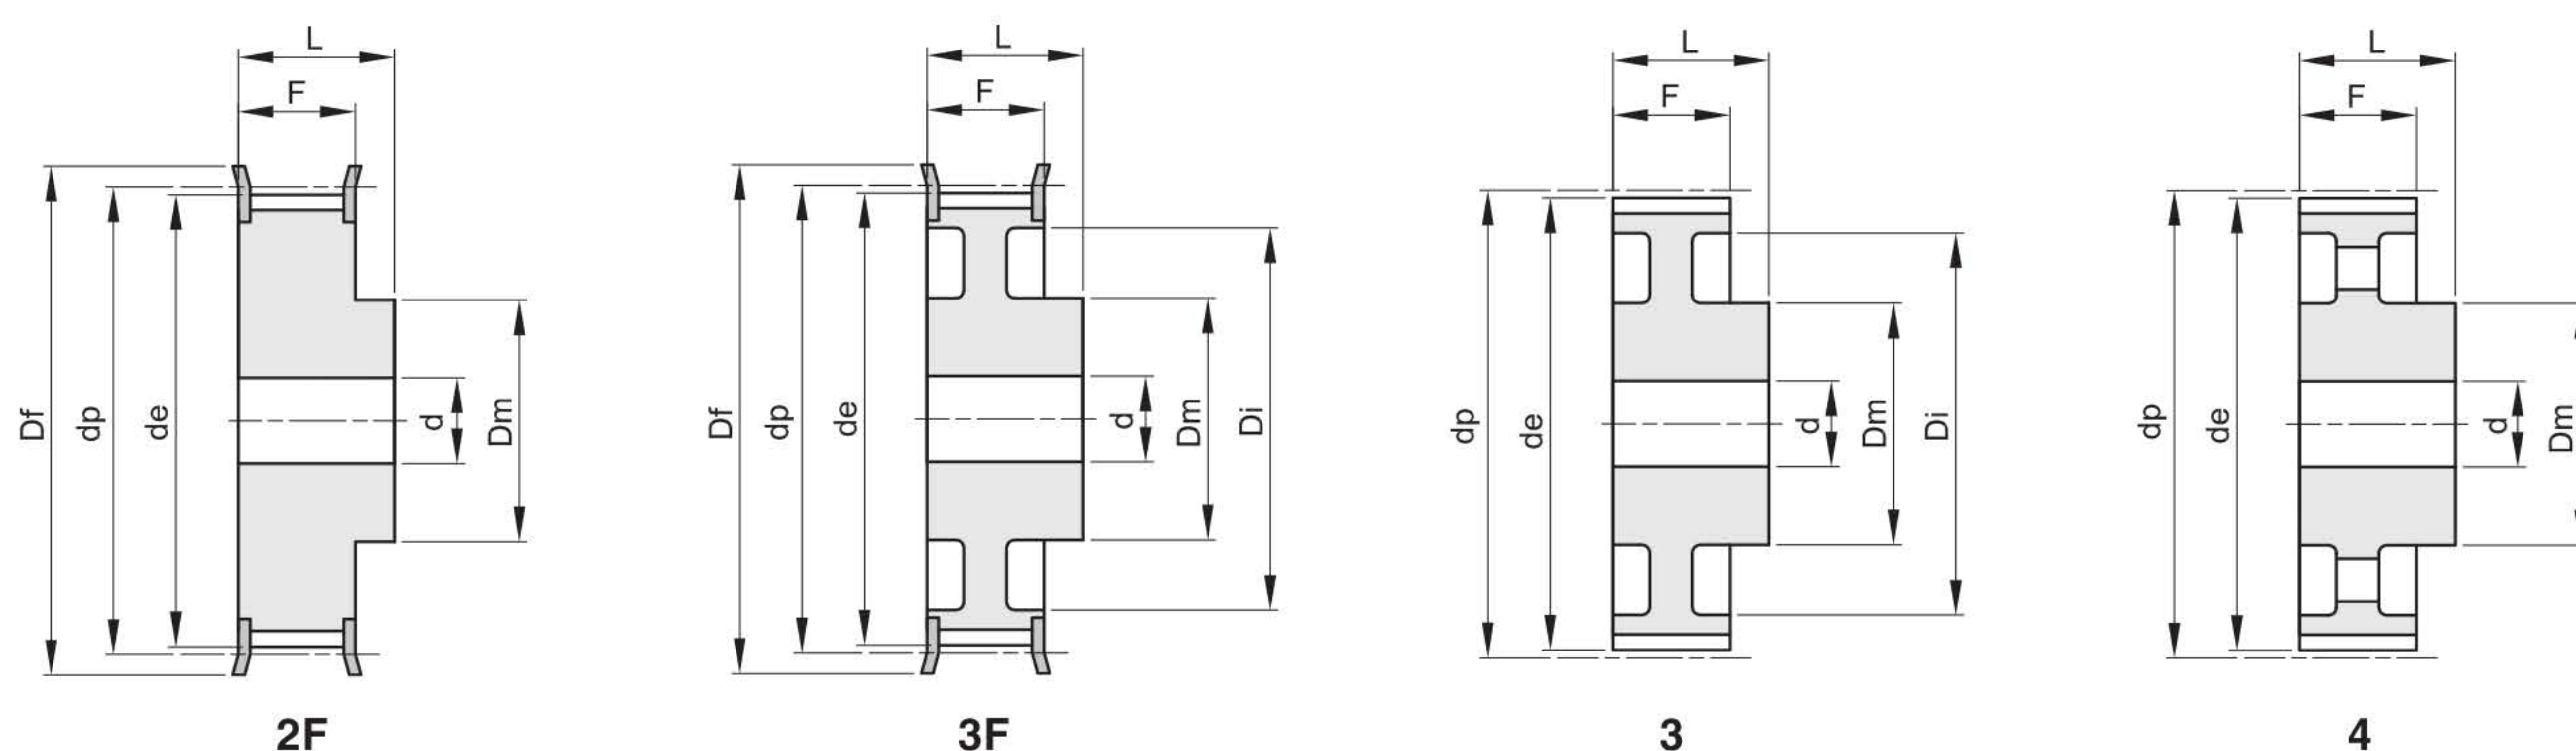


codice	tipo	mat.	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
22 8M 30	2F	St	22	56,02	54,65	60	43		38	48	12	308	0,75
24 8M 30	2F	St	24	61,11	59,74	66	45		38	48	12	310	0,90
26 8M 30	2F	St	26	66,21	64,84	71	48		38	48	12	311	1,10
28 8M 30	2F	St	28	71,30	70,08	75	50		38	48	14	312	1,20
30 8M 30	2F	St	30	76,39	75,13	83	55		38	48	14	314	1,32
32 8M 30	2F	St	32	81,49	80,16	87	60		38	48	14	315	1,55
34 8M 30	2F	St	34	86,58	85,21	91	66		38	48	14	316	1,80
36 8M 30	2F	St	36	91,67	90,30	98	70		38	48	14	319	2,10
38 8M 30	2F	St	38	96,77	95,39	103	75		38	48	14	320	2,30
40 8M 30	2F	St	40	101,86	100,49	106	75		38	48	14	321	2,47
44 8M 30	2F	St	44	112,05	110,67	119	75		38	48	14	325	2,95
48 8M 30	2F	St	48	122,23	120,86	127	75		38	48	14	327	3,30
56 8M 30	3F	St	56	142,60	141,23	148	90	116	38	48	14	333	4,02
64 8M 30	3F	St	64	162,97	161,60	168	90	137	38	48	14	338	4,60
72 8M 30	3F	St	72	183,35	181,97	192	95	158	38	48	14	340	5,41
80 8M 30	3	GG	80	203,72	202,35		100	180	38	48	14		5,23
90 8M 30	3	GG	90	229,18	227,81		100	204	38	48	14		6,42
112 8M 30	4	GG	112	285,21	283,83		100	254	38	48	18		8,12
144 8M 30	4	GG	144	366,69	365,32		100	336	38	48	20		10,36
168 8M 30	4	GG	168	427,81	426,44		100	400	38	48	20		12,37
192 8M 30	4	GG	192	488,92	487,55		100	460	38	48	20		14,31


8M

Passo 8 mm


Per cinghie larghezza 50 mm

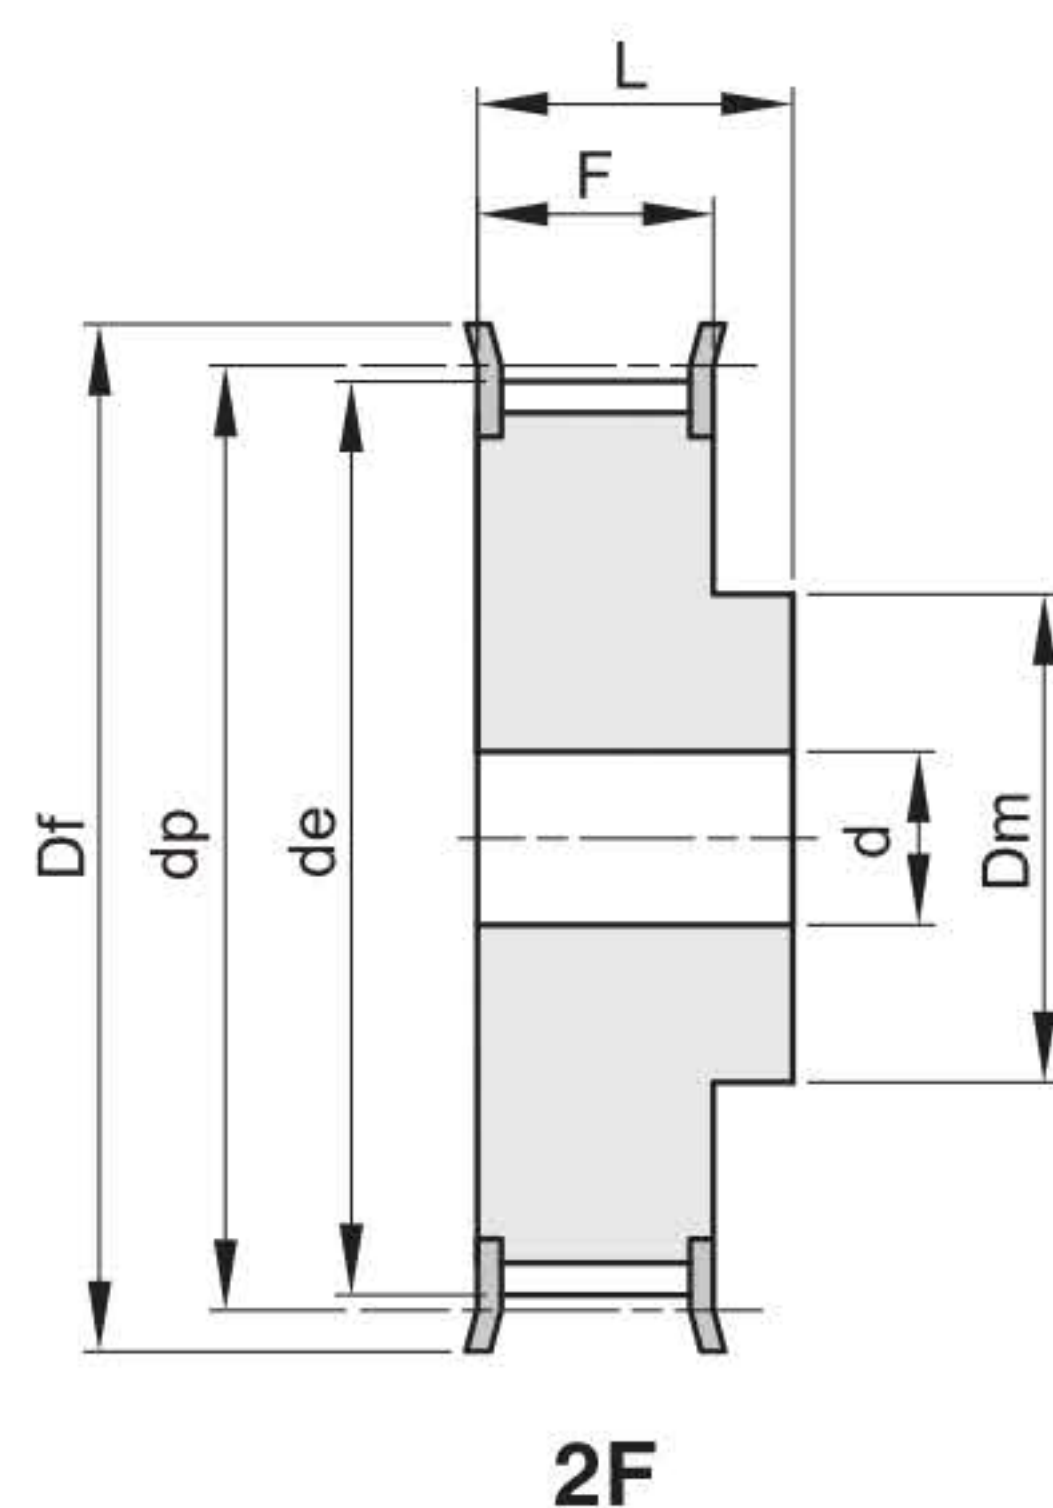


2F

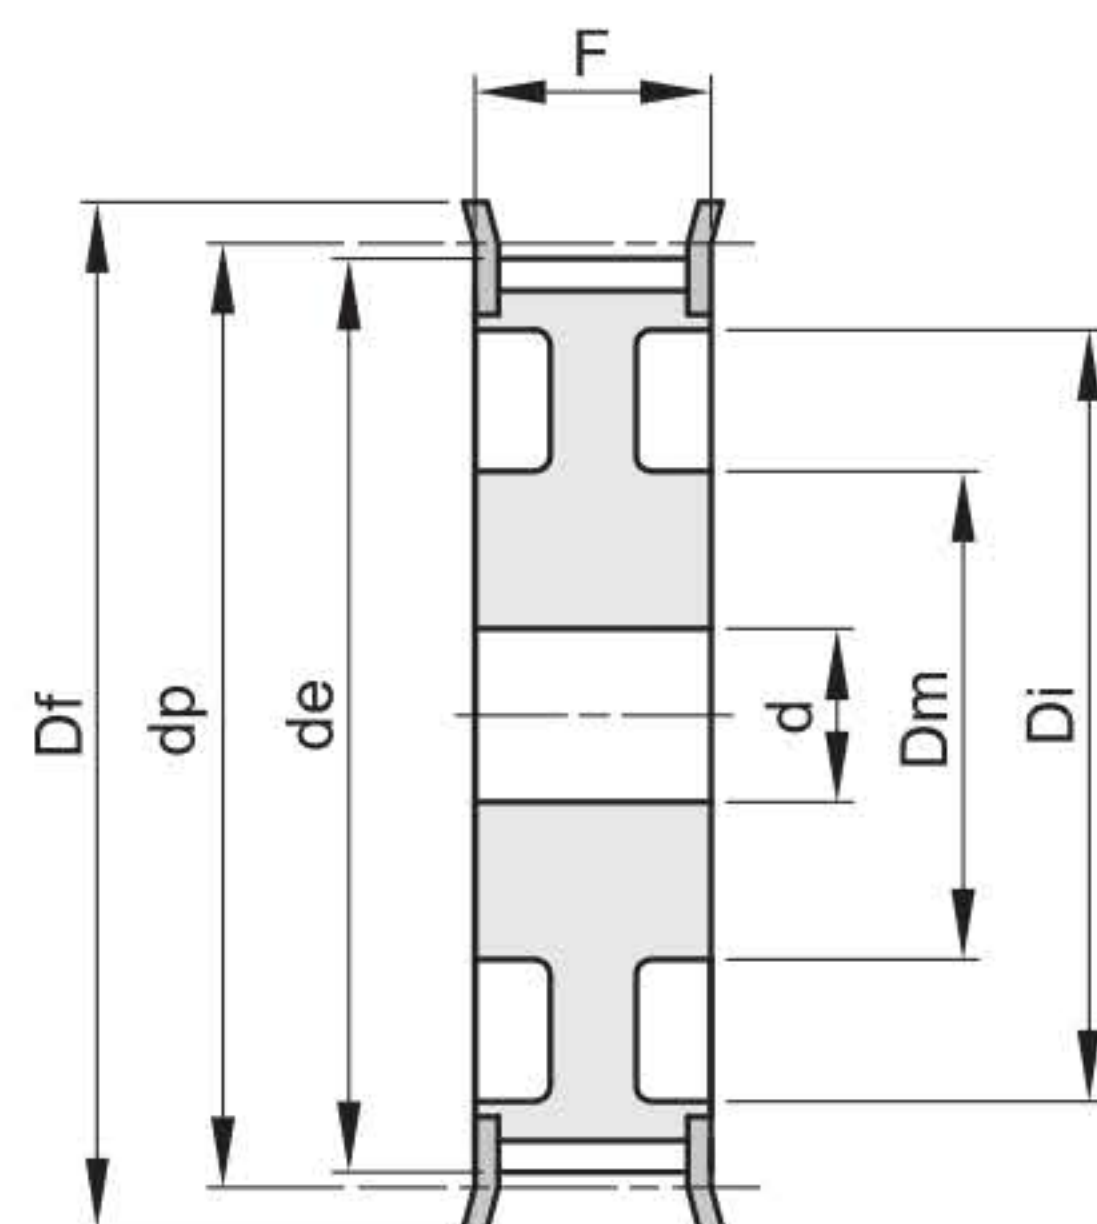

7F

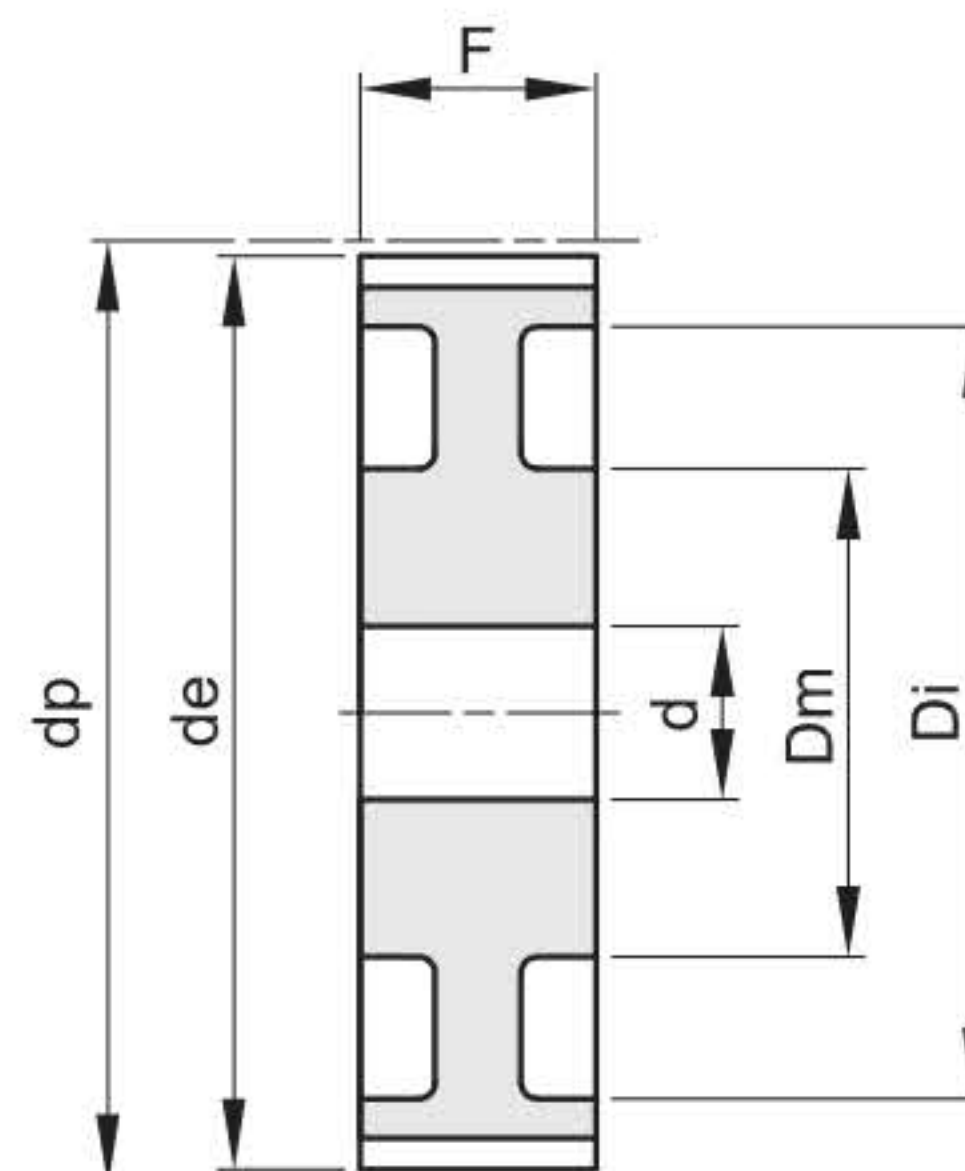

7

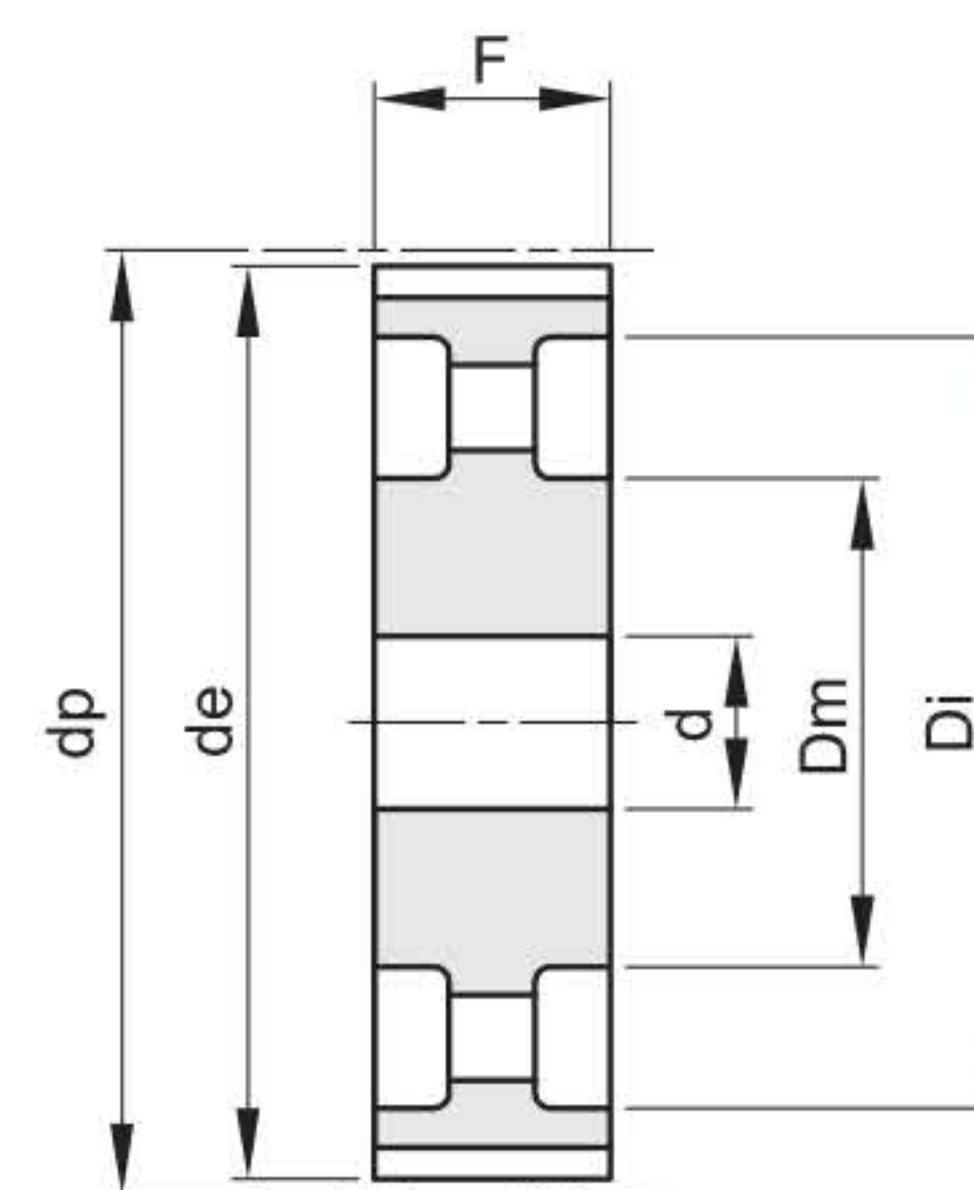


8

codice	tipo	mat.	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
22 8M 50	2F	St	22	56,02	54,65	60	43		60	70	12	308	1,10
24 8M 50	2F	St	24	61,11	59,74	66	45		60	70	12	310	1,30
26 8M 50	2F	St	26	66,21	64,84	71	48		60	70	12	311	1,60
28 8M 50	2F	St	28	71,30	70,08	75	50		60	70	14	312	1,70
30 8M 50	2F	St	30	76,39	75,13	83	55		60	70	14	314	2,00
32 8M 50	2F	St	32	81,49	80,16	87	60		60	70	14	315	2,35
34 8M 50	2F	St	34	86,58	85,21	91	66		60	70	14	316	2,80
36 8M 50	2F	St	36	91,67	90,30	98	70		60	70	14	319	3,10
38 8M 50	2F	St	38	96,77	95,39	103	75		60	70	14	320	3,30
40 8M 50	2F	St	40	101,86	100,49	106	75		60	70	14	321	3,60
44 8M 50	2F	St	44	112,05	110,67	119	75		60	70	14	325	4,40
48 8M 50	2F	St	48	122,23	120,86	127	75		60	70	14	327	5,00
56 8M 50	7F	St	56	142,60	141,23	148	90	116	60	60	18	333	5,68
64 8M 50	7F	St	64	162,97	161,60	168	100	137	60	60	18	338	6,93
72 8M 50	7F	St	72	183,35	181,97	192	100	158	60	60	18	340	7,95
80 8M 50	7	GG	80	203,72	202,35		110	180	60	60	18		7,96
90 8M 50	7	GG	90	229,18	227,81		110	204	60	60	18		9,20
112 8M 50	8	GG	112	285,21	283,83		110	254	60	60	18		12,16
144 8M 50	8	GG	144	366,69	365,32		110	336	60	60	20		15,68
168 8M 50	8	GG	168	427,81	426,44		120	400	60	60	20		18,99
192 8M 50	8	GG	192	488,92	487,55		130	460	60	60	20		24,09


8M

Passo 8 mm


Per cinghie larghezza 85 mm

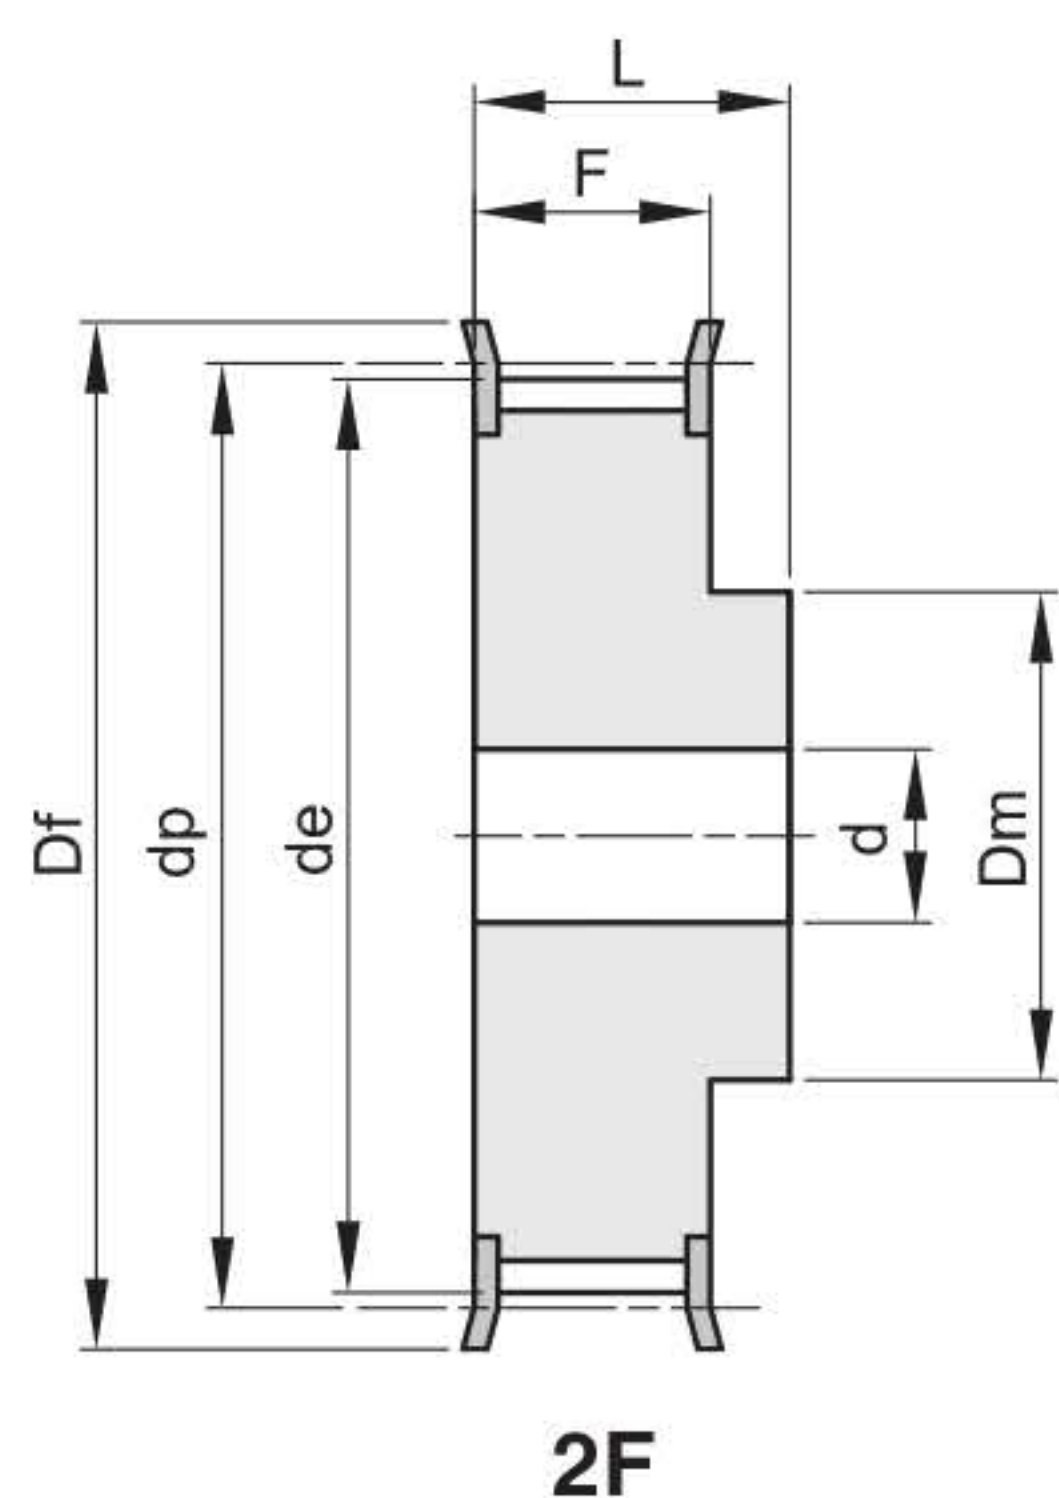

2F

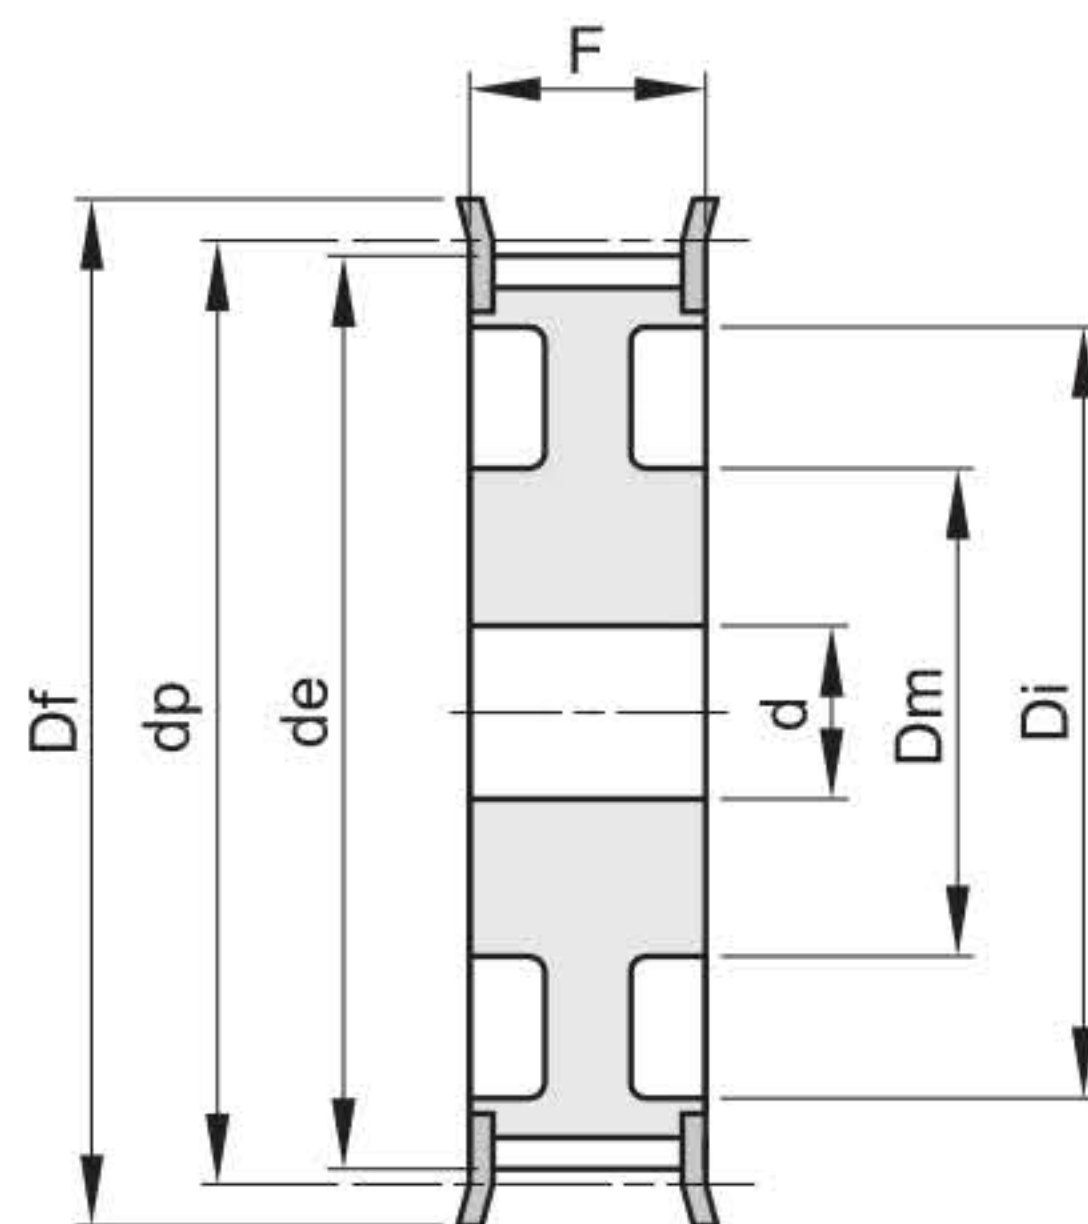

7F

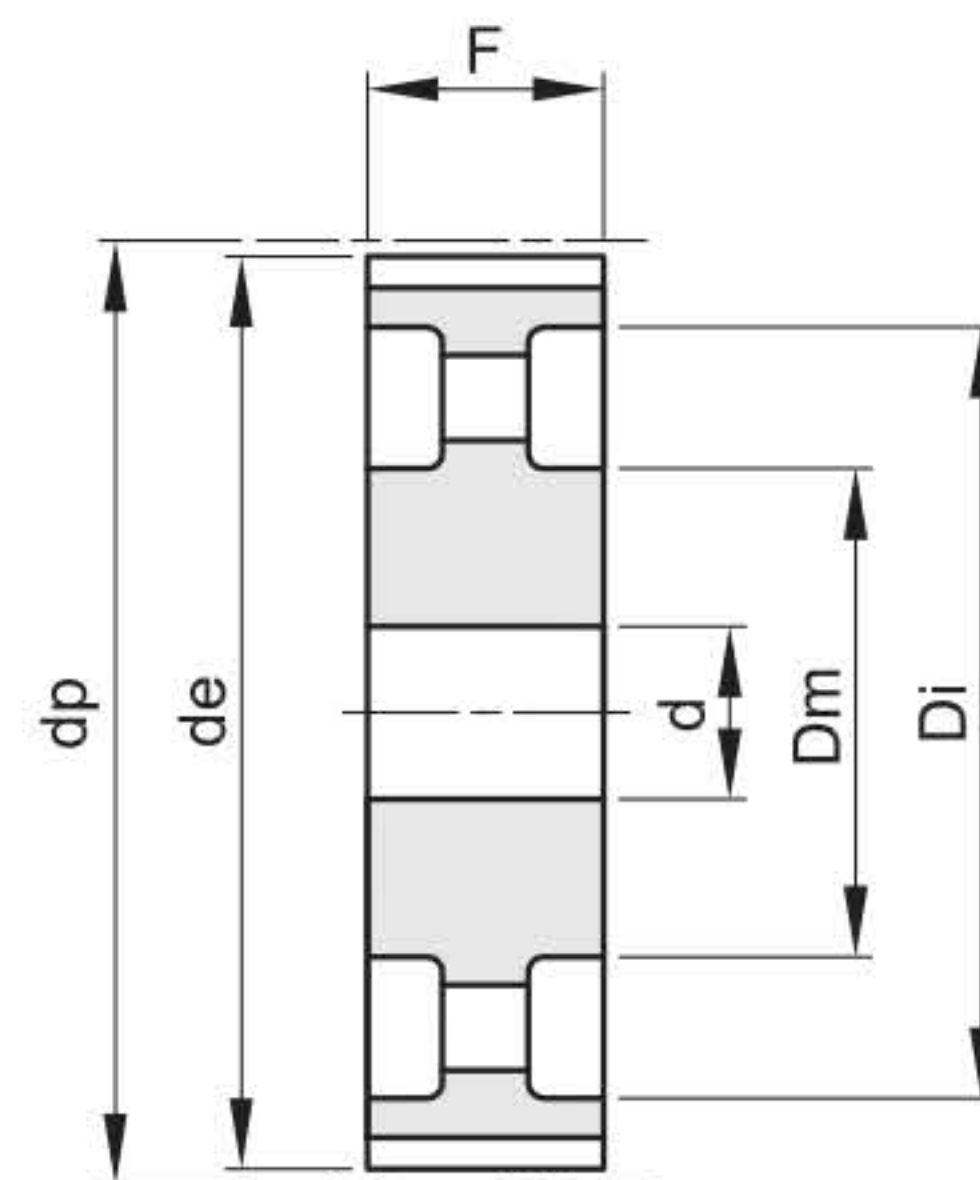


8

codice	tipo	mat.	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
22 8M 85	2F	St	22	56,02	54,65	60	43		95	105	12	308	1,60
24 8M 85	2F	St	24	61,11	59,74	66	45		95	105	12	310	1,95
26 8M 85	2F	St	26	66,21	64,84	71	48		95	105	12	311	2,30
28 8M 85	2F	St	28	71,30	70,08	75	50		95	105	14	312	2,60
30 8M 85	2F	St	30	76,39	75,13	83	55		95	105	14	314	3,10
32 8M 85	2F	St	32	81,49	80,16	87	60		95	105	14	315	3,70
34 8M 85	2F	St	34	86,58	85,21	91	66		95	105	14	316	4,00
36 8M 85	2F	St	36	91,67	90,30	98	70		95	105	14	319	4,70
38 8M 85	2F	St	38	96,77	95,39	103	75		95	105	14	320	5,10
40 8M 85	2F	St	40	101,86	100,49	106	75		95	105	14	321	5,40
44 8M 85	2F	St	44	112,05	110,67	119	75		95	105	14	325	6,70
48 8M 85	2F	St	48	122,23	120,86	127	75		95	105	14	327	7,20
56 8M 85	2F	St	56	142,60	141,23	148	90		95	105	18	333	11,48
64 8M 85	7F	St	64	162,97	161,60	168	100	137	95	95	18	338	11,02
72 8M 85	7F	St	72	183,35	181,97	192	100	158	95	95	18	340	13,45
80 8M 85	8	GG	80	203,72	202,35		110	180	95	95	20		12,36
90 8M 85	8	GG	90	229,18	227,81		110	204	95	95	20		14,38
112 8M 85	8	GG	112	285,21	283,83		110	254	95	95	24		18,66
144 8M 85	8	GG	144	366,69	365,32		110	341	95	95	24		23,00

14M

Passo 14 mm

Per cinghie larghezza 40 mm

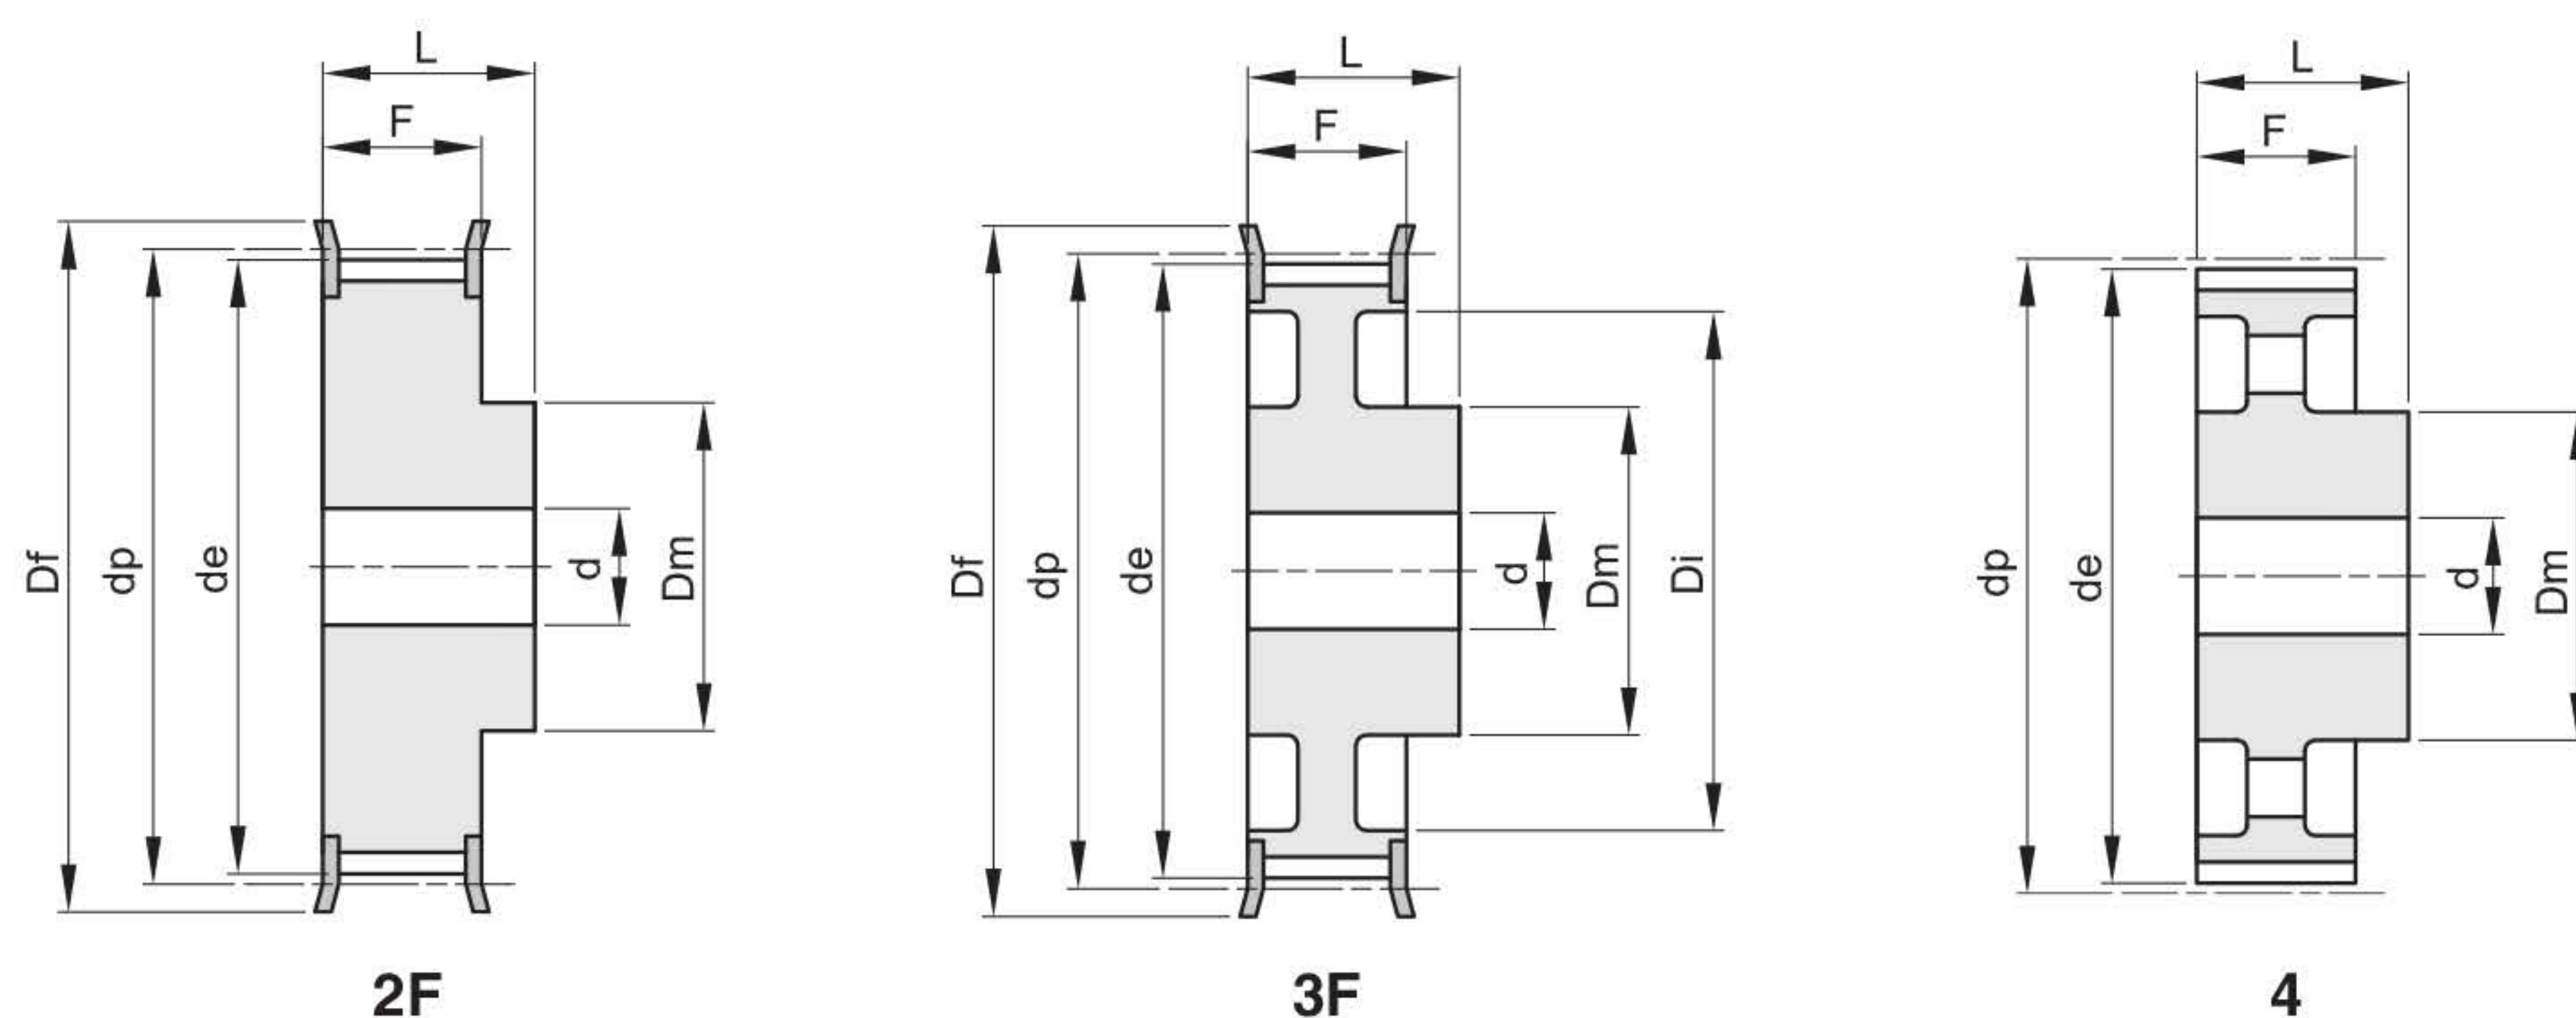


codice	tipo	mat.	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
28 14M 40	2F	St	28	124,78	122,12	127	100		54	69	24	400	4,80
30 14M 40	2F	St	30	133,69	130,99	138	100		54	69	24	401	5,60
32 14M 40	2F	St	32	142,60	139,88	154	100		54	69	24	403	6,20
34 14M 40	2F	St	34	151,52	148,79	160	100		54	69	24	404	6,90
36 14M 40	2F	St	36	160,43	157,68	168	100		54	69	24	405	7,70
38 14M 40	2F	St	38	169,34	166,60	183	120		54	69	24	406	8,90
40 14M 40	2F	St	40	178,25	175,49	188	120		54	69	24	407	9,80
44 14M 40	2F	St	44	196,08	193,28	211	120		54	69	24	411	12,00
48 14M 40	3F	GG	48	213,90	211,11	226	135	170	54	69	24	412	11,98
56 14M 40	3F	GG	56	249,55	246,76	256	135	207	54	69	28	416	14,01
64 14M 40	3F	GG	64	285,21	282,41	296	135	240	54	69	28	418	16,65
72 14M 40	4	GG	72	320,86	318,06		135	278	54	69	28		15,52
80 14M 40	4	GG	80	356,51	353,71		135	314	54	69	28		17,23
90 14M 40	4	GG	90	401,07	398,28		135	358	54	69	28		19,40
112 14M 40	4	GG	112	499,11	496,32		135	456	54	69	28		24,14

14M

Passo 14 mm

Per cinghie larghezza 55 mm

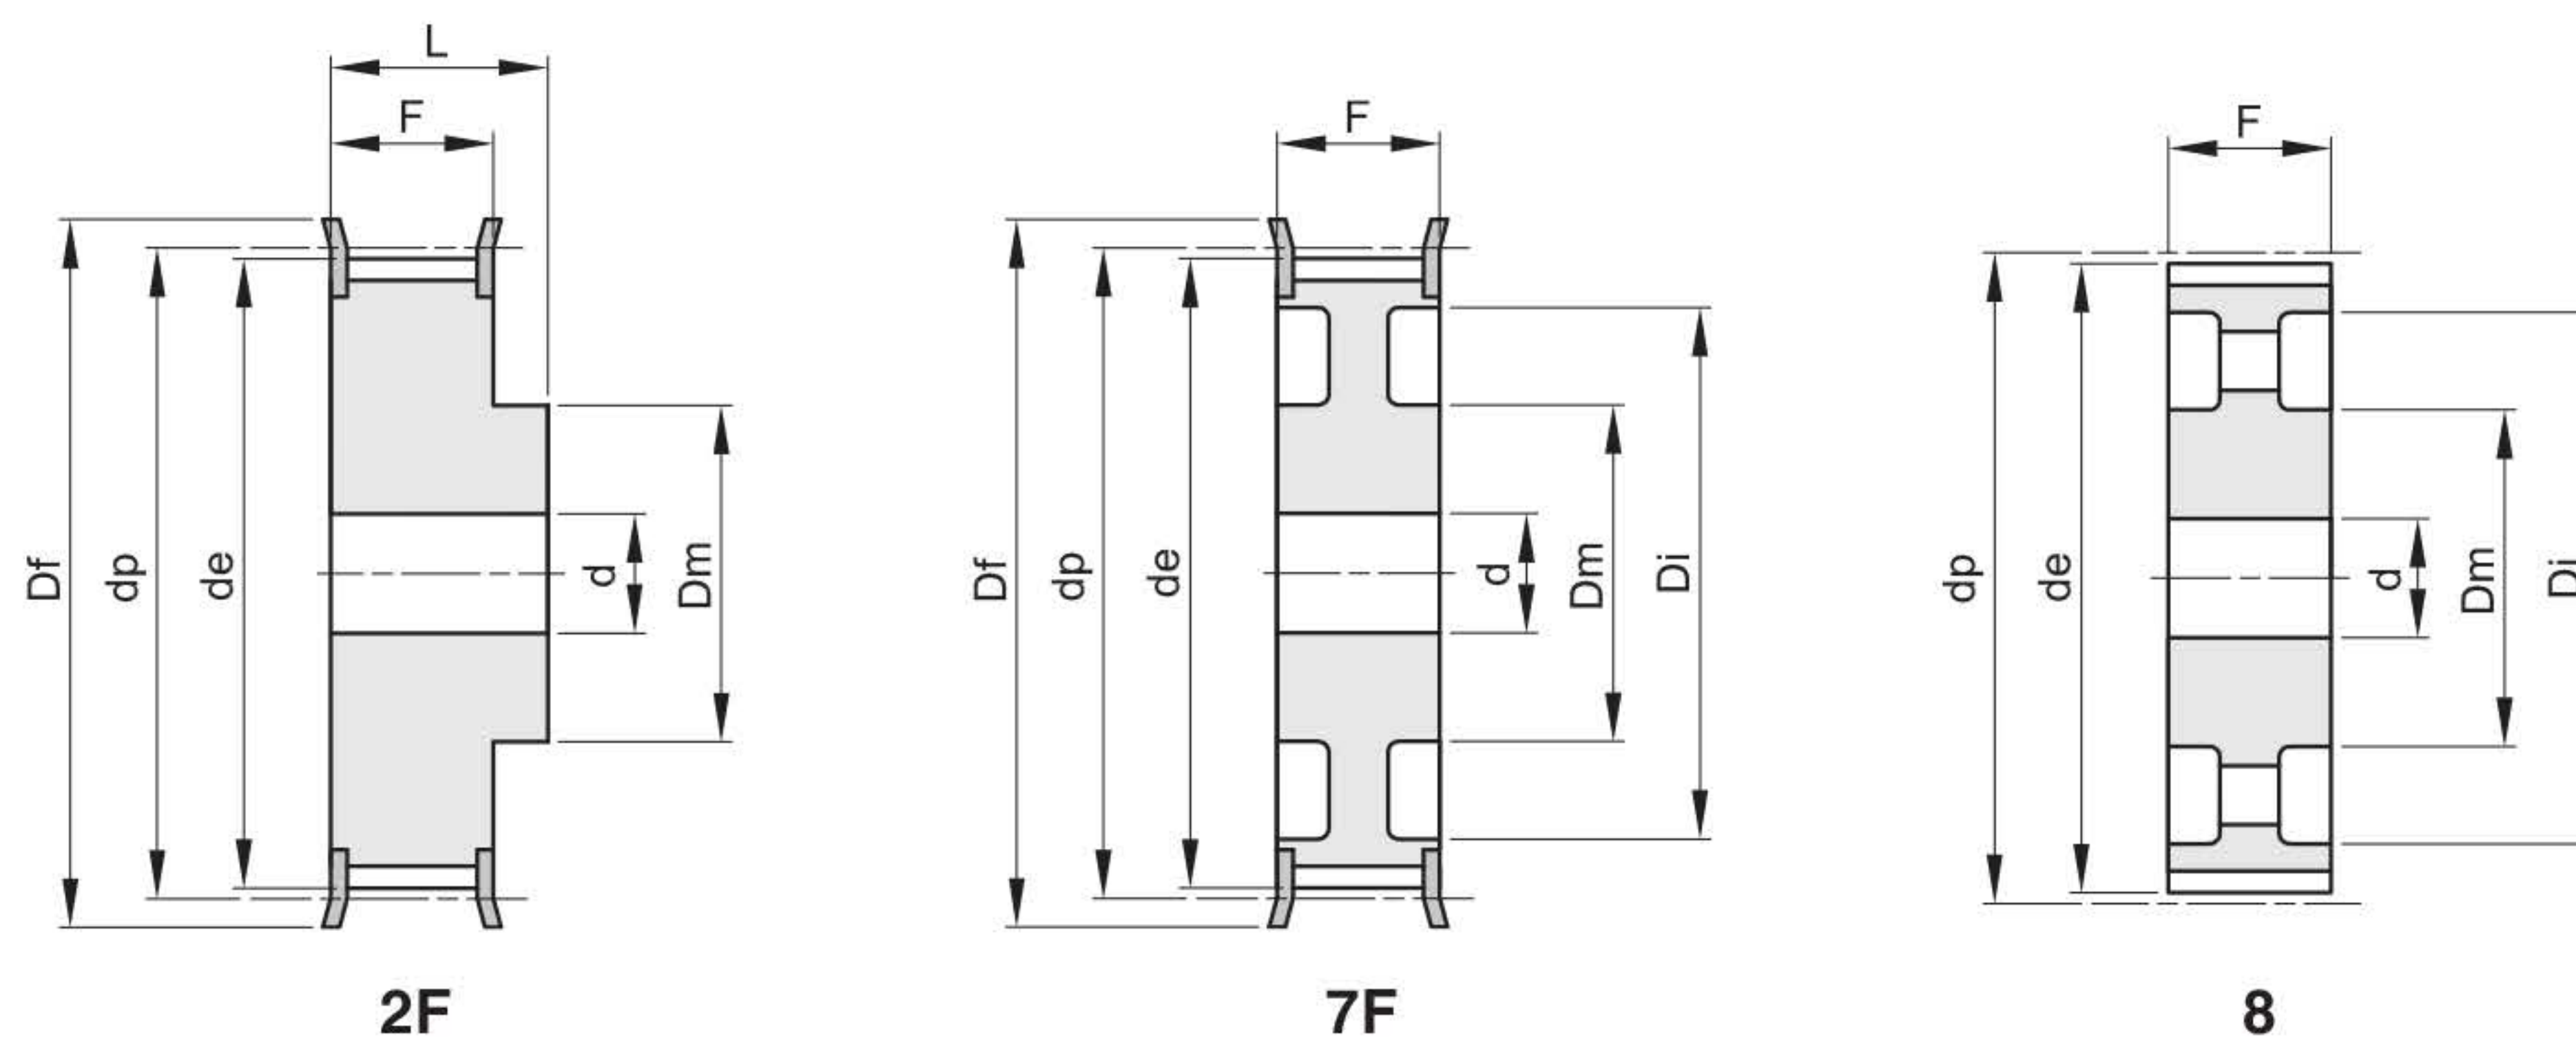


codice	tipo	mat.	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
28 14M 55	2F	St	28	124,78	122,12	127	100		70	85	24	400	5,70
30 14M 55	2F	St	30	133,69	130,99	138	100		70	85	24	401	7,10
32 14M 55	2F	St	32	142,60	139,88	154	100		70	85	24	403	7,90
34 14M 55	2F	St	34	151,52	148,79	160	100		70	85	24	404	9,33
36 14M 55	2F	St	36	160,43	157,68	168	100		70	85	24	405	10,49
38 14M 55	2F	St	38	169,34	166,60	183	120		70	85	24	406	12,11
40 14M 55	2F	St	40	178,25	175,49	188	120		70	85	24	407	13,30
44 14M 55	2F	St	44	196,08	193,28	211	120		70	85	24	411	16,12
48 14M 55	7F	GG	48	213,90	211,11	226	135	170	70	70	24	412	13,50
56 14M 55	7F	GG	56	249,55	246,76	256	135	207	70	70	28	416	15,78
64 14M 55	7F	GG	64	285,21	282,41	296	135	240	70	70	28	418	19,04
72 14M 55	8	GG	72	320,86	318,06		135	278	70	70	28		18,41
80 14M 55	8	GG	80	356,51	353,71		135	314	70	70	28		20,27
90 14M 55	8	GG	90	401,07	398,28		135	358	70	70	28		22,98
112 14M 55	8	GG	112	499,11	496,32		135	456	70	70	28		29,29
144 14M 55	8	GG	144	641,71	638,92		135	600	70	70	28		36,00
168 14M 55	8	GG	168	748,66	745,87		135	706	70	70	28		40,00
192 14M 55	8	GG	192	855,62	852,82		135	813	70	70	28		47,50

14M

Passo 14 mm

Per cinghie larghezza 85 mm

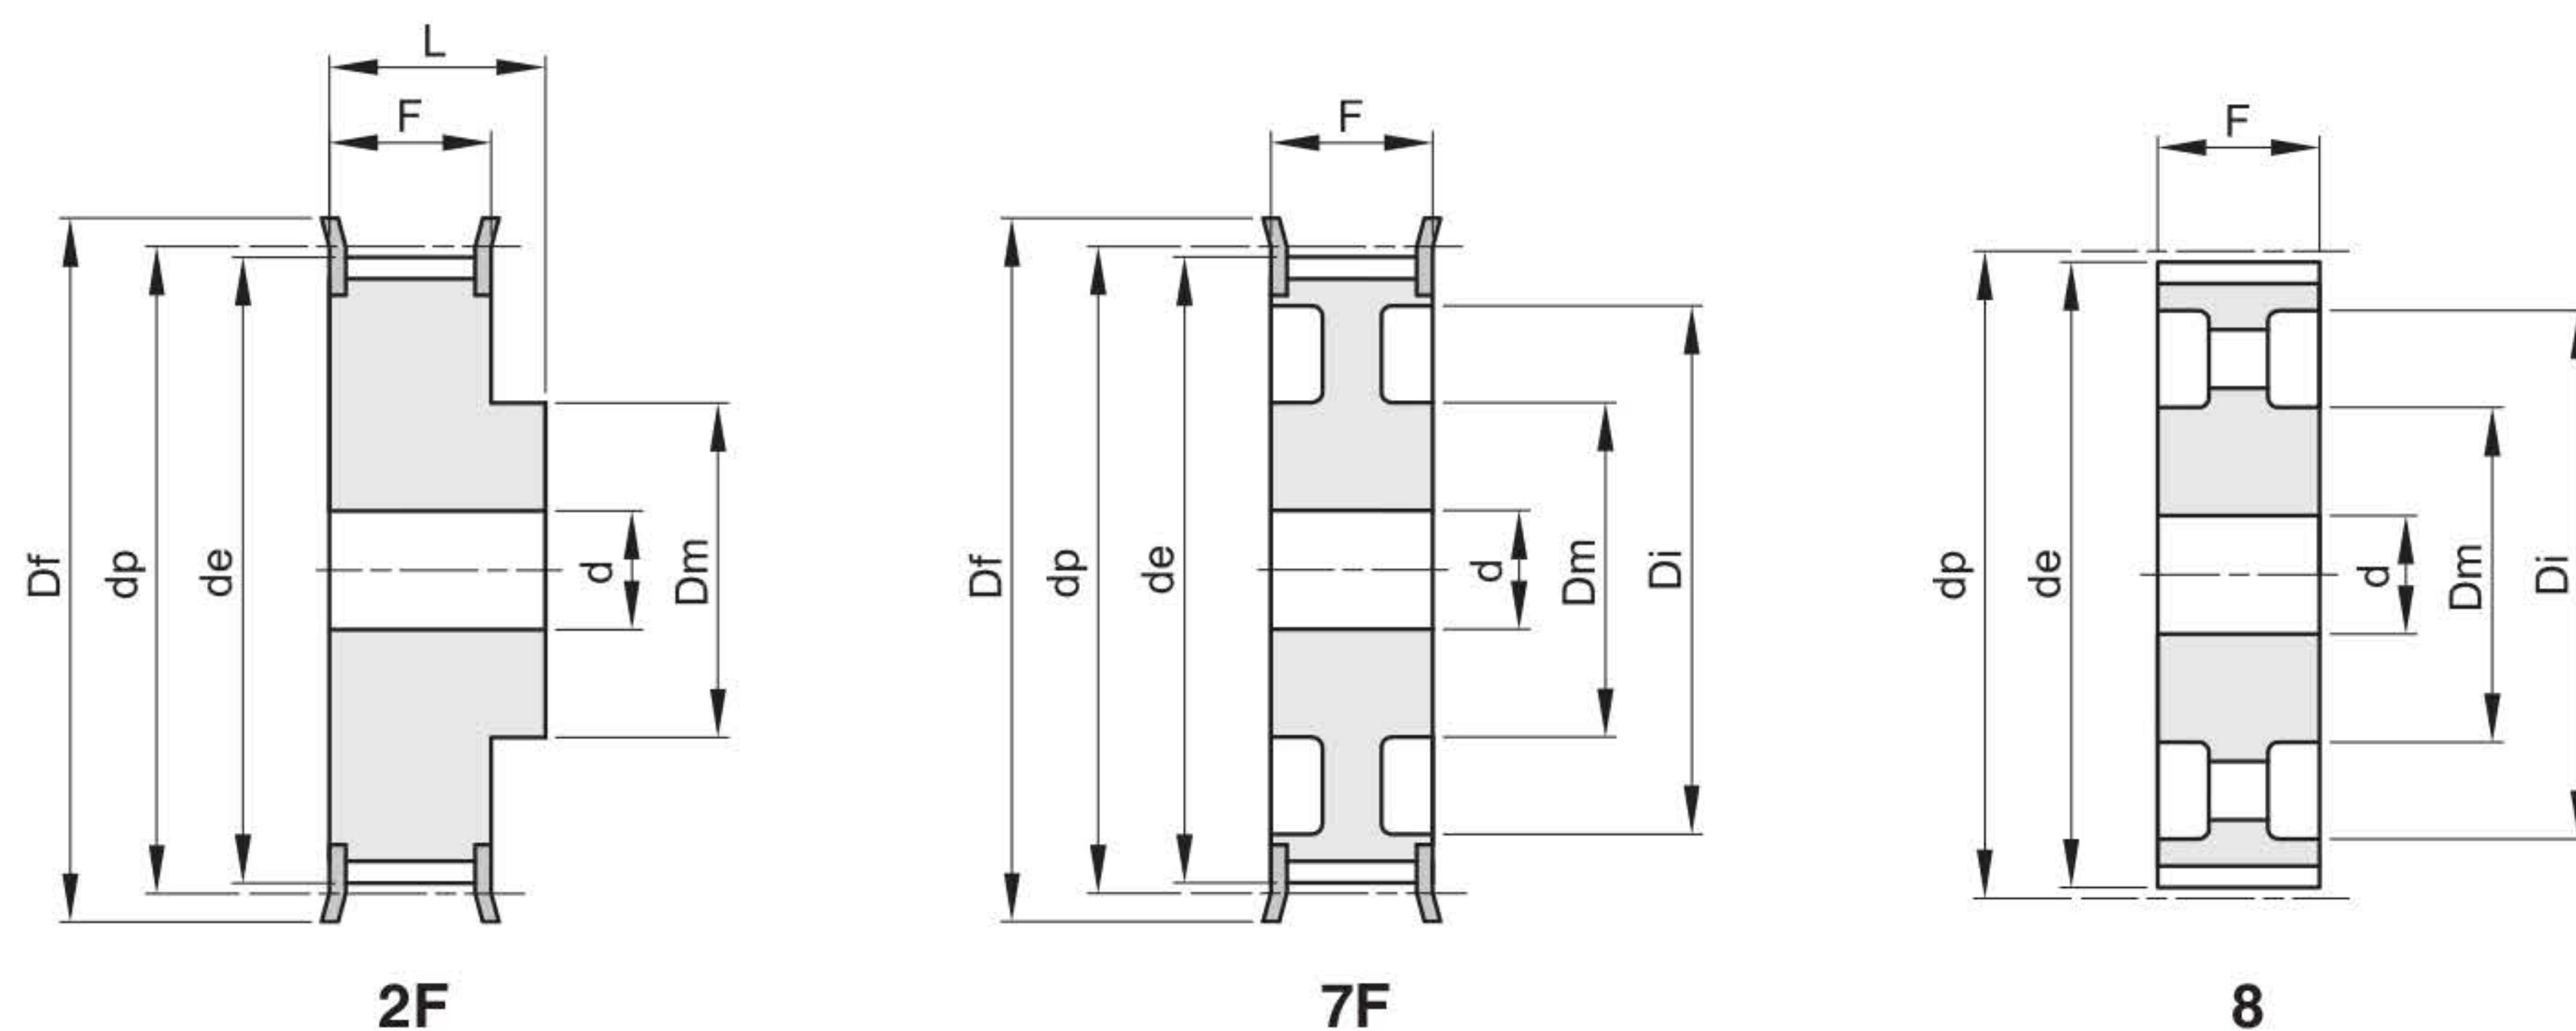


codice	tipo	mat.	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
28 14M 85	2F	St	28	124,78	122,12	127	100		102	117	24	400	8,77
30 14M 85	2F	St	30	133,69	130,99	138	100		102	117	24	401	10,13
32 14M 85	2F	St	32	142,60	139,88	154	100		102	117	24	403	11,65
34 14M 85	2F	St	34	151,52	148,79	160	100		102	117	24	404	13,15
36 14M 85	2F	St	36	160,43	157,68	168	100		102	117	32	405	14,48
38 14M 85	2F	St	38	169,34	166,60	183	120		102	117	32	406	16,62
40 14M 85	2F	St	40	178,25	175,49	188	135		102	117	32	407	18,84
44 14M 85	2F	St	44	196,08	193,28	211	135		102	117	32	411	22,86
48 14M 85	2F	St	48	213,90	211,11	226	150		102	117	32	412	27,58
56 14M 85	7F	GG	56	249,55	246,76	256	150	207	102	102	32	416	24,19
64 14M 85	7F	GG	64	285,21	282,41	296	150	240	102	102	32	418	28,57
72 14M 85	8	GG	72	320,86	318,06		150	278	102	102	32		28,26
80 14M 85	8	GG	80	356,51	353,71		150	314	102	102	32		31,00
90 14M 85	8	GG	90	401,07	398,28		150	358	102	102	32		35,00
112 14M 85	8	GG	112	499,11	496,32		150	456	102	102	32		43,50
144 14M 85	8	GG	144	641,71	638,92		150	600	102	102	32		50,00
168 14M 85	8	GG	168	748,66	745,87		150	706	102	102	32		63,00
192 14M 85	8	GG	192	855,62	852,82		165	813	102	102	32		76,00

14M

Passo 14 mm

Per cinghie larghezza 115 mm



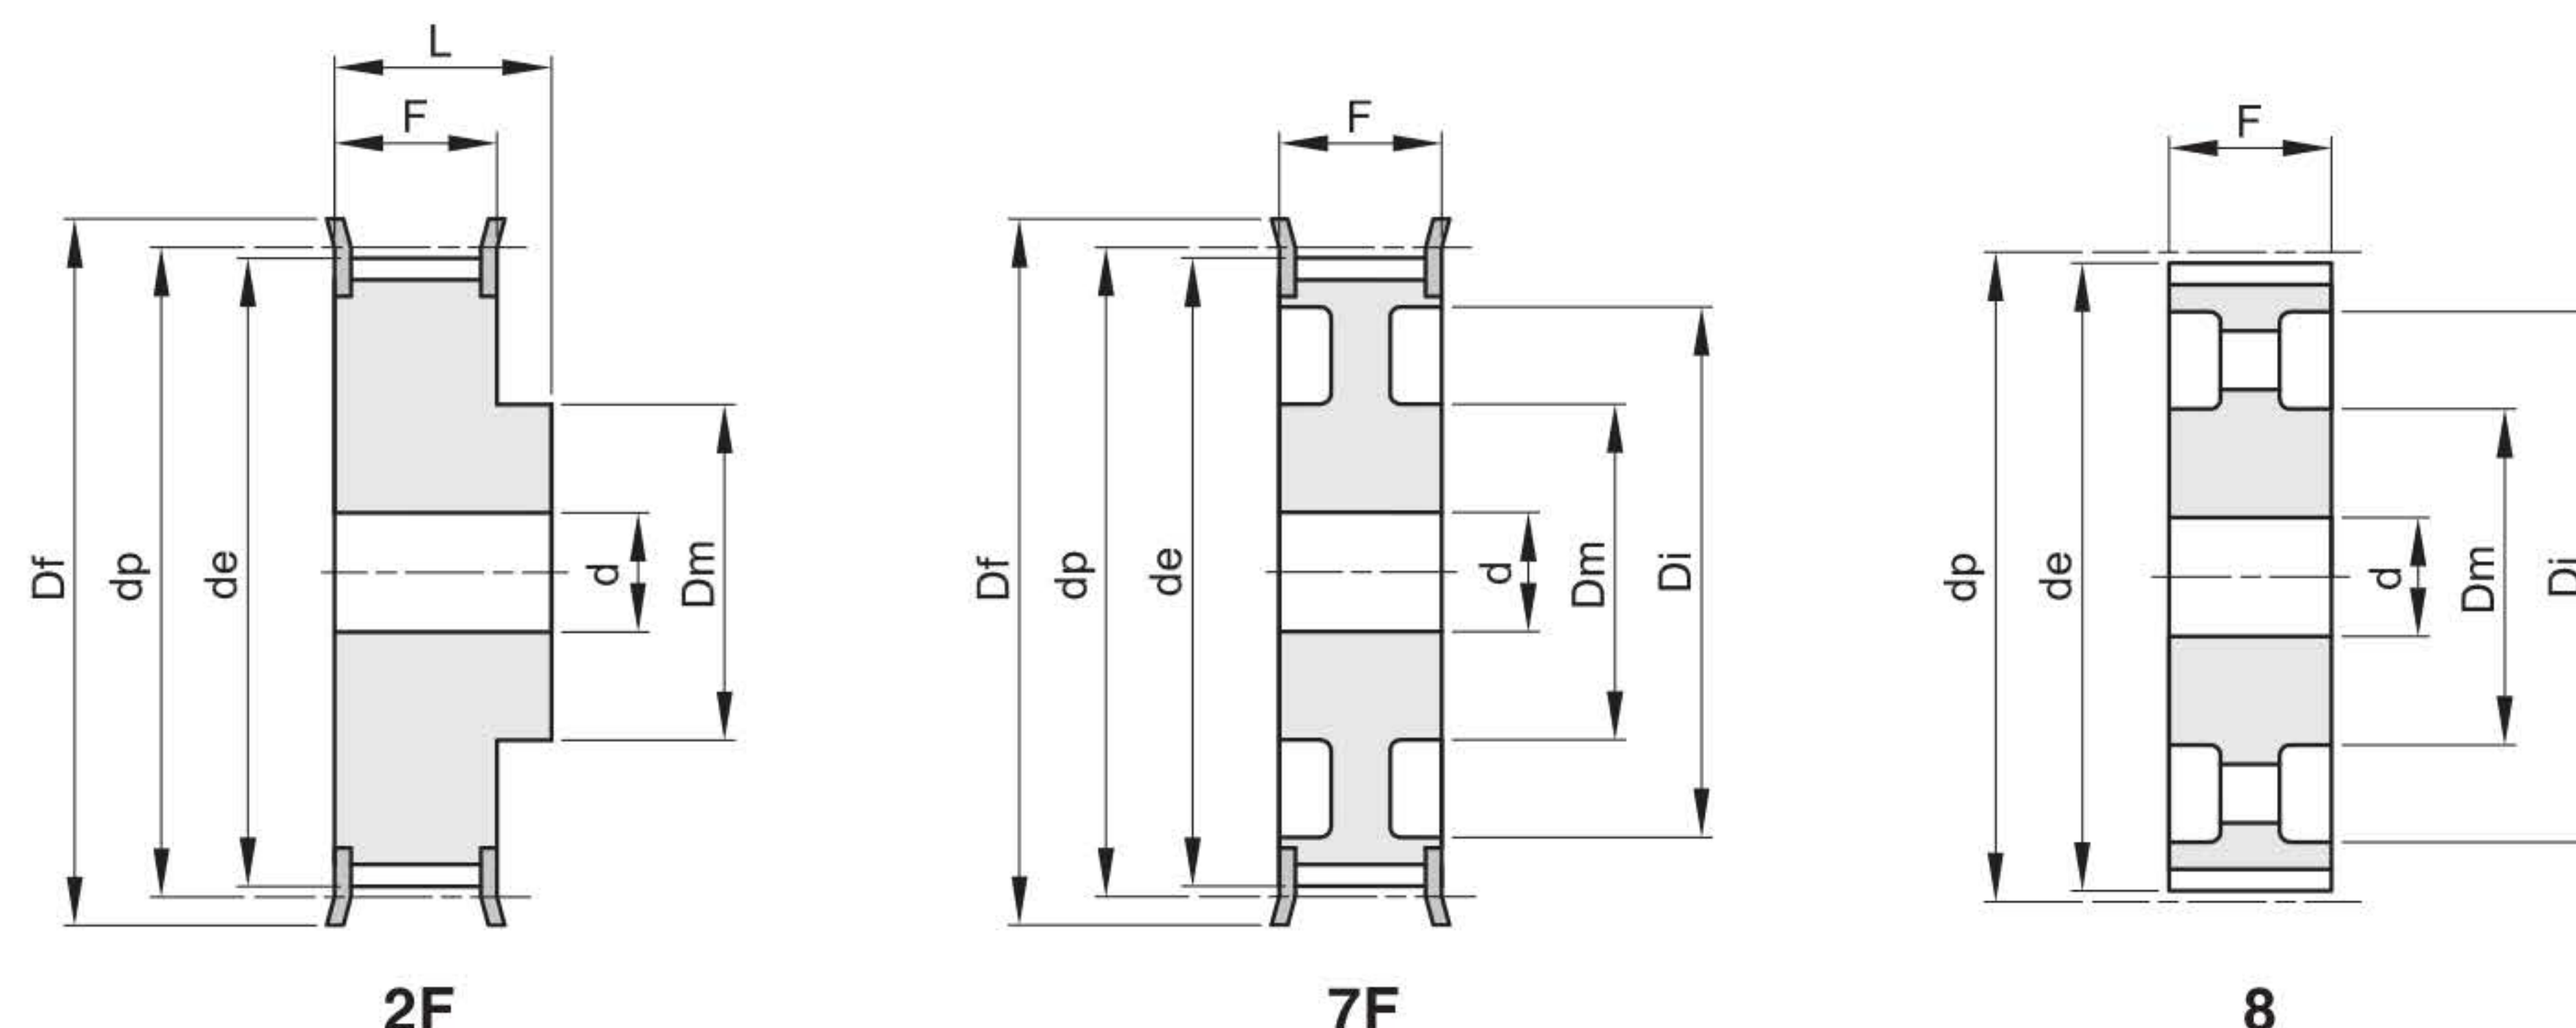


codice	tipo	mat.	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
28 14M 115	2F	St	28	124,78	122,12	127	100		133	148	32	400	10,75
30 14M 115	2F	St	30	133,69	130,99	138	100		133	148	32	401	12,52
32 14M 115	2F	St	32	142,60	139,88	154	100		133	148	32	403	14,48
34 14M 115	2F	St	34	151,52	148,79	160	100		133	148	32	404	16,45
36 14M 115	2F	St	36	160,43	157,68	168	120		133	148	32	405	18,99
38 14M 115	2F	St	38	169,34	166,60	183	120		133	148	32	406	21,31
40 14M 115	2F	St	40	178,25	175,49	188	135		133	148	32	407	24,04
44 14M 115	2F	St	44	196,08	193,28	211	140		133	148	32	411	29,41
48 14M 115	2F	St	48	213,90	211,11	226	150		133	148	32	412	35,00
56 14M 115	2F	St	56	249,55	246,76	256	150		133	148	32	416	48,00
64 14M 115	7F	GG	64	285,21	282,41	296	150	240	133	133	32	418	36,00
72 14M 115	8	GG	72	320,86	318,06		150	278	133	133	32		36,00
80 14M 115	8	GG	80	356,51	353,71		150	314	133	133	32		40,00
90 14M 115	8	GG	90	401,07	398,28		150	358	133	133	32		45,00
112 14M 115	8	GG	112	499,11	496,32		150	456	133	133	32		55,50
144 14M 115	8	GG	144	641,71	638,92		165	600	133	133	32		71,00
168 14M 115	8	GG	168	748,66	745,87		165	706	133	133	32		83,00
192 14M 115	8	GG	192	855,62	852,82		165	813	133	133	32		96,00

14M

Passo 14 mm

Per cinghie larghezza 170 mm

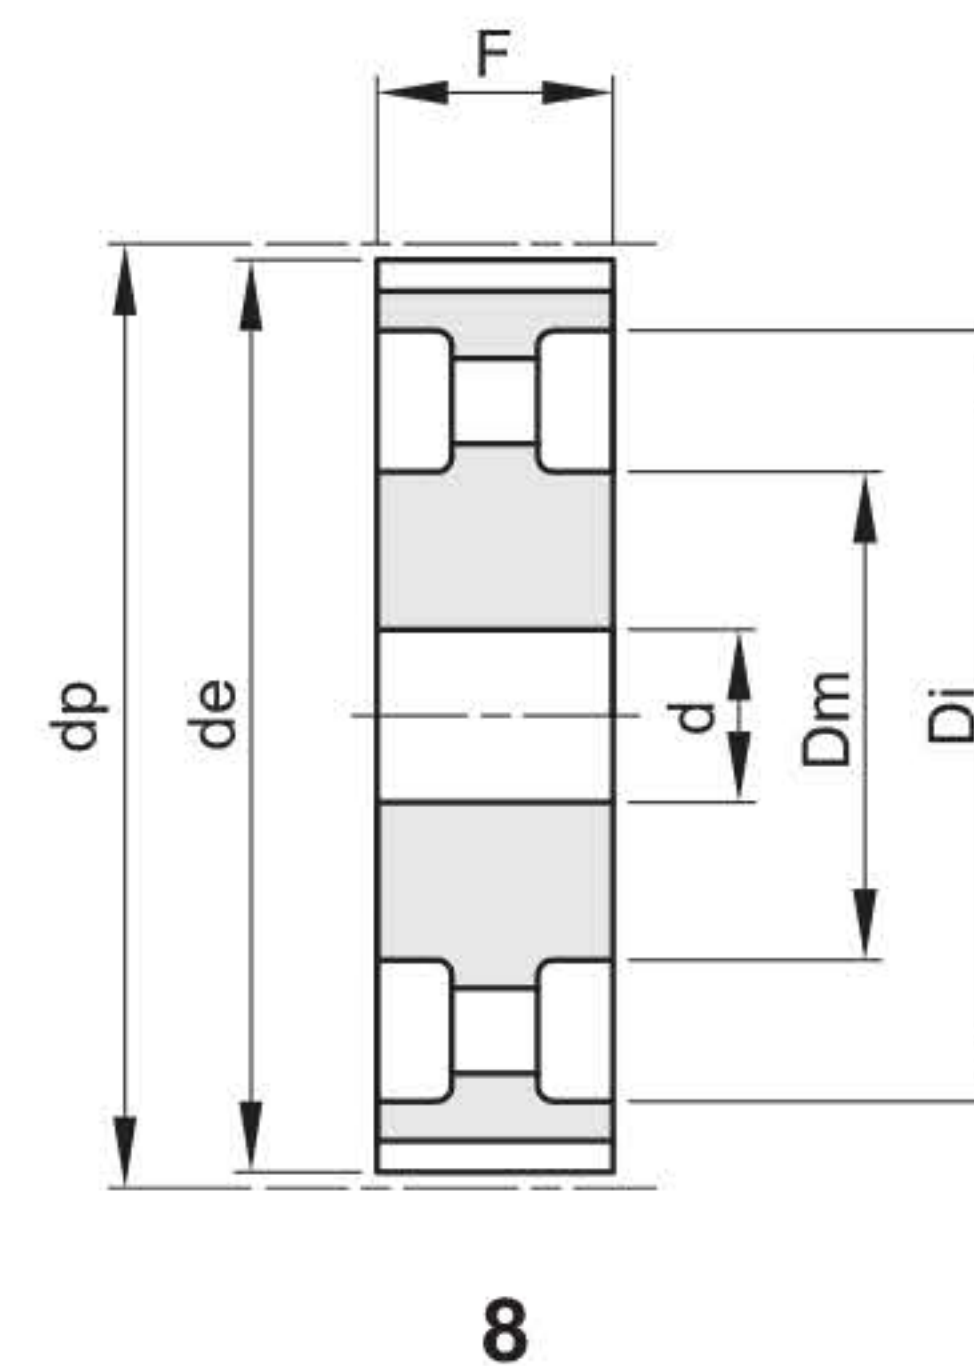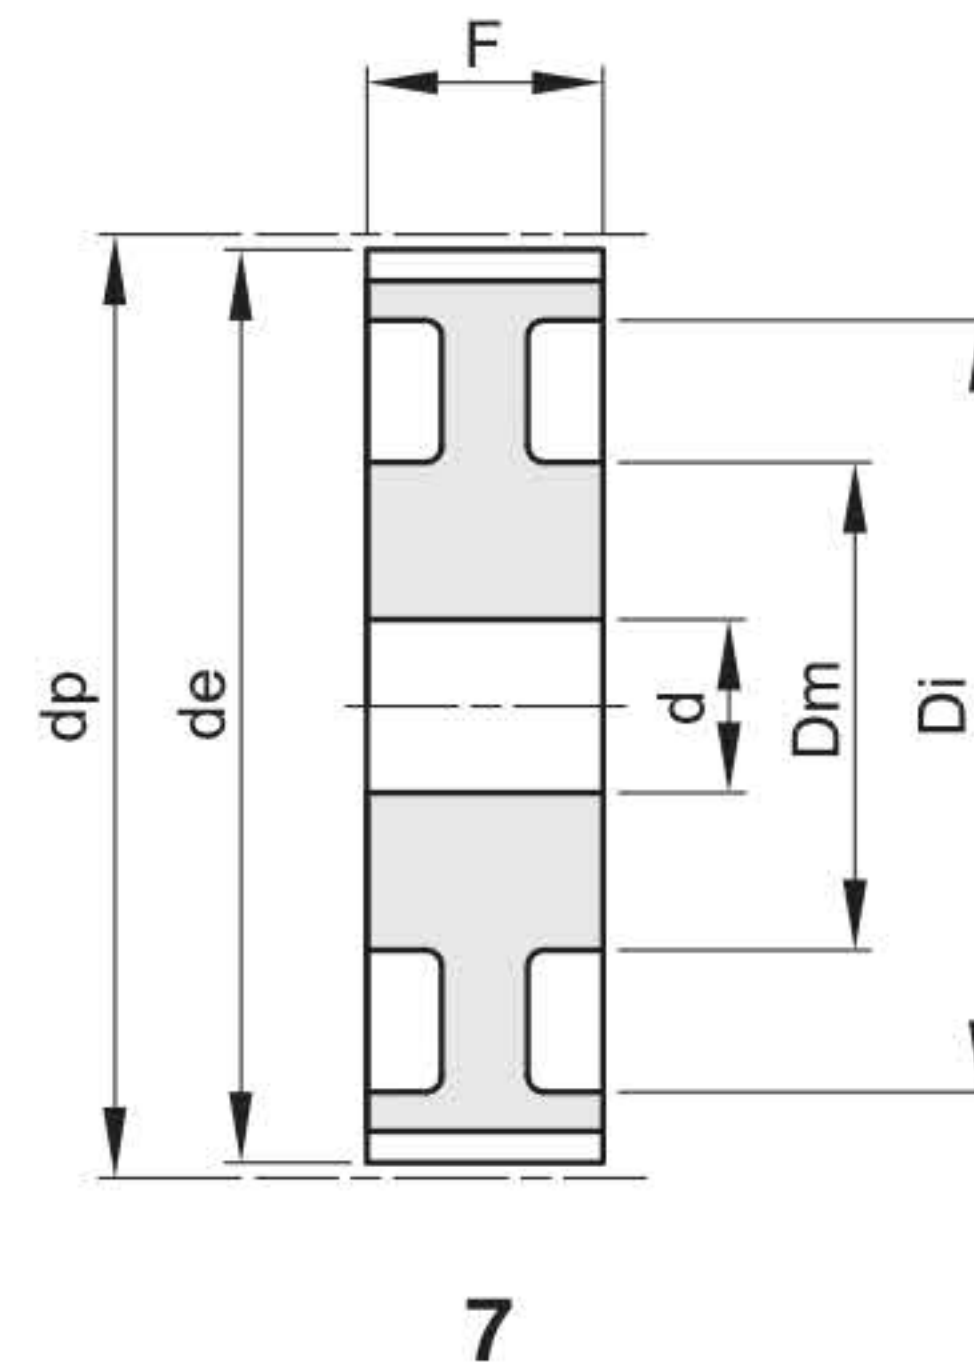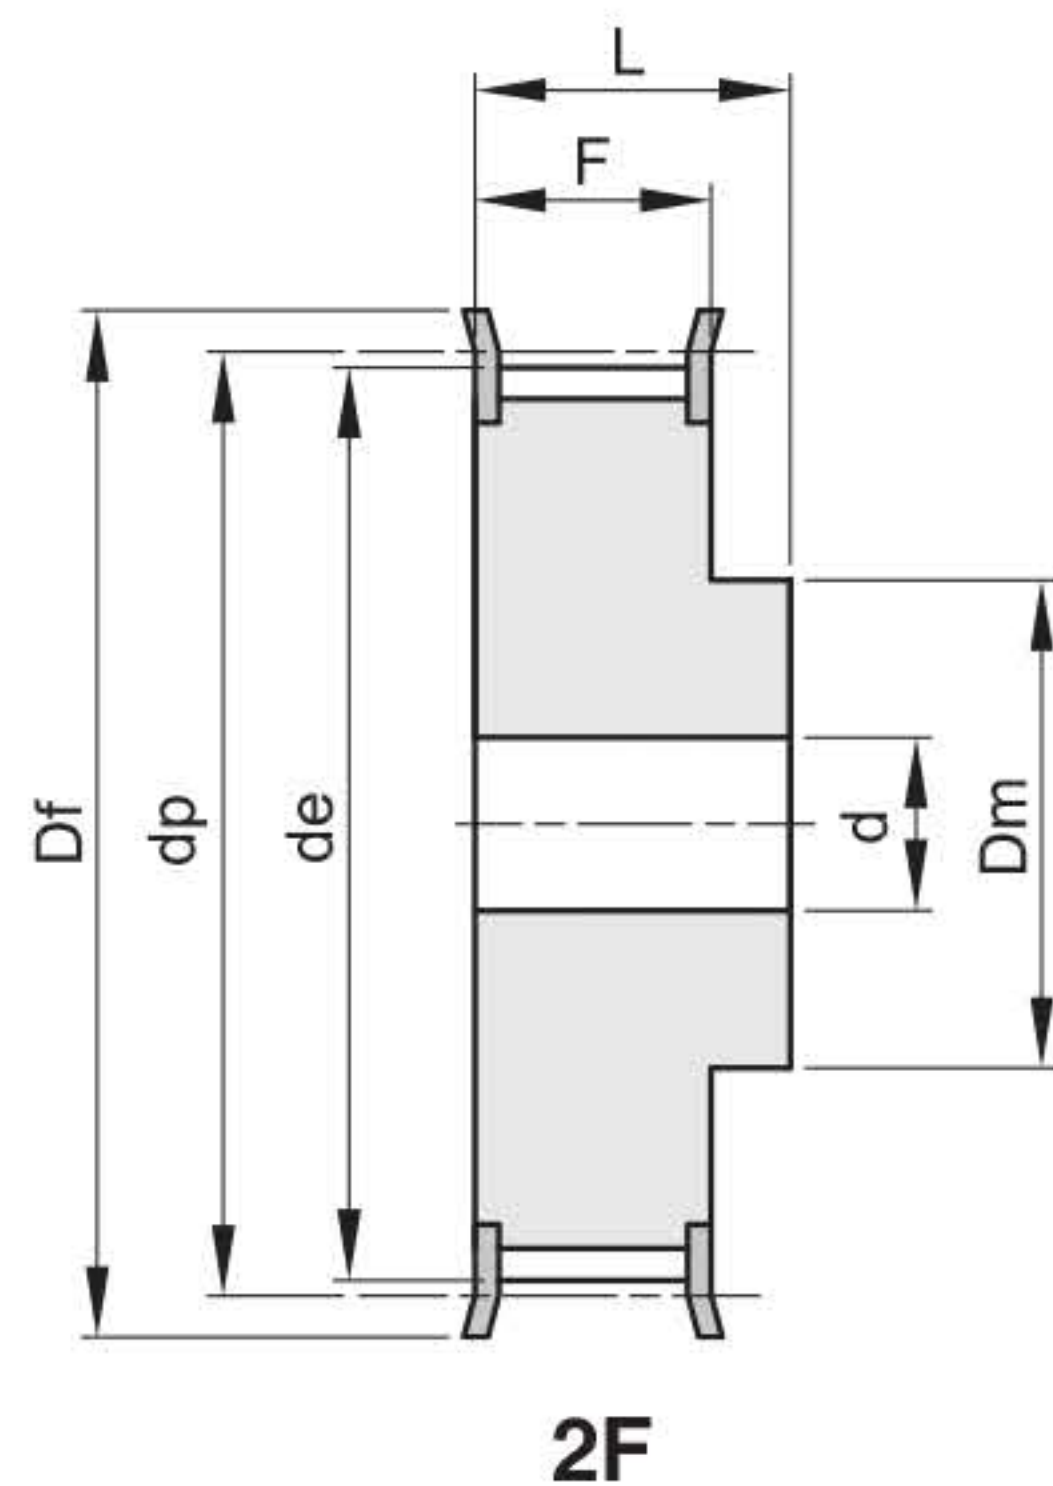


codice	tipo	mat.	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
28 14M 170	2F	St	28	124,78	122,12	127	100		187	202	32	400	14,79
30 14M 170	2F	St	30	133,69	130,99	138	100		187	202	32	401	17,24
32 14M 170	2F	St	32	142,60	139,88	154	100		187	202	32	403	19,92
34 14M 170	2F	St	34	151,52	148,79	160	100		187	202	32	404	22,72
36 14M 170	2F	St	36	160,43	157,68	168	120		187	202	32	405	26,07
38 14M 170	2F	St	38	169,34	166,60	183	135		187	202	32	406	29,71
40 14M 170	2F	St	40	178,25	175,49	188	140		187	202	32	407	33,50
80 14M 170	7	GG	80	356,51	353,71		180	314	187	187	32		71,00
90 14M 170	8	GG	90	401,07	398,28		180	358	187	187	38		73,00
112 14M 170	8	GG	112	499,11	496,32		200	456	187	187	38		95,00
144 14M 170	8	GG	144	641,71	638,92		220	600	187	187	38		114,00
168 14M 170	8	GG	168	748,66	745,87		220	706	187	187	38		142,00


5M

Passo 5 mm


Per cinghie larghezza 15 mm

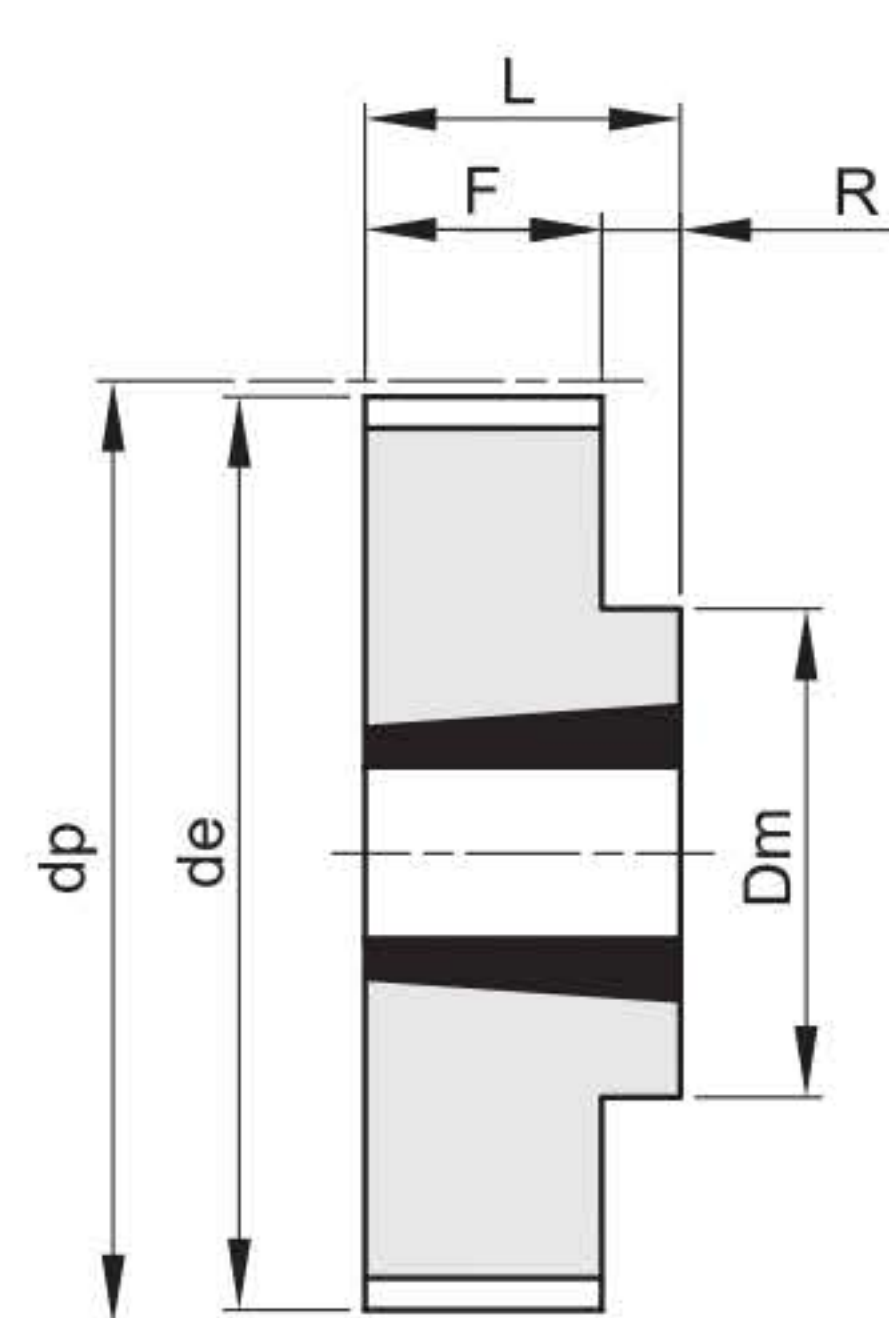


10

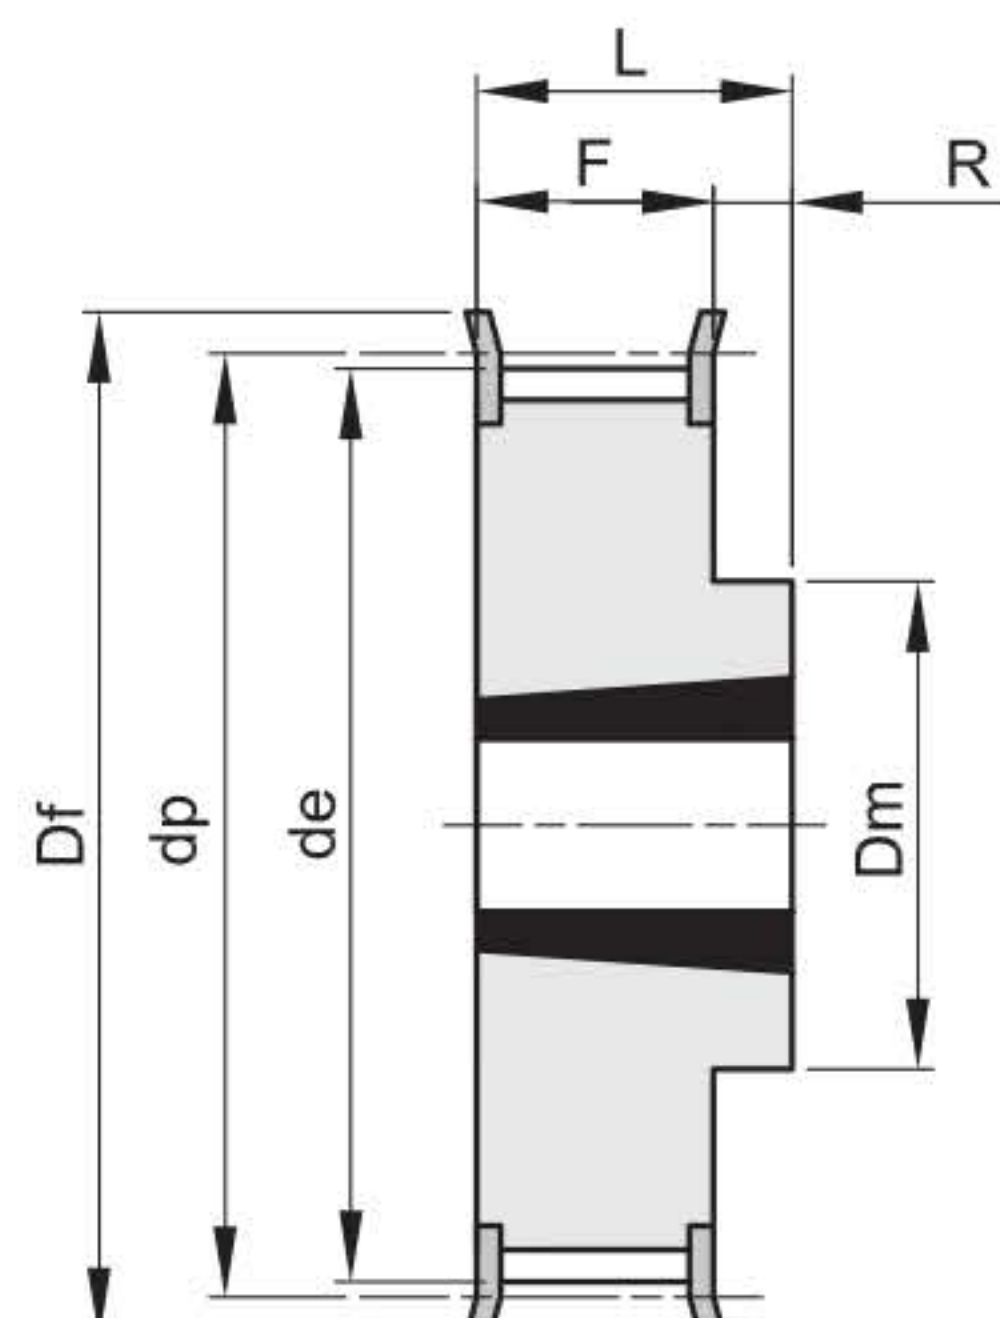

10F

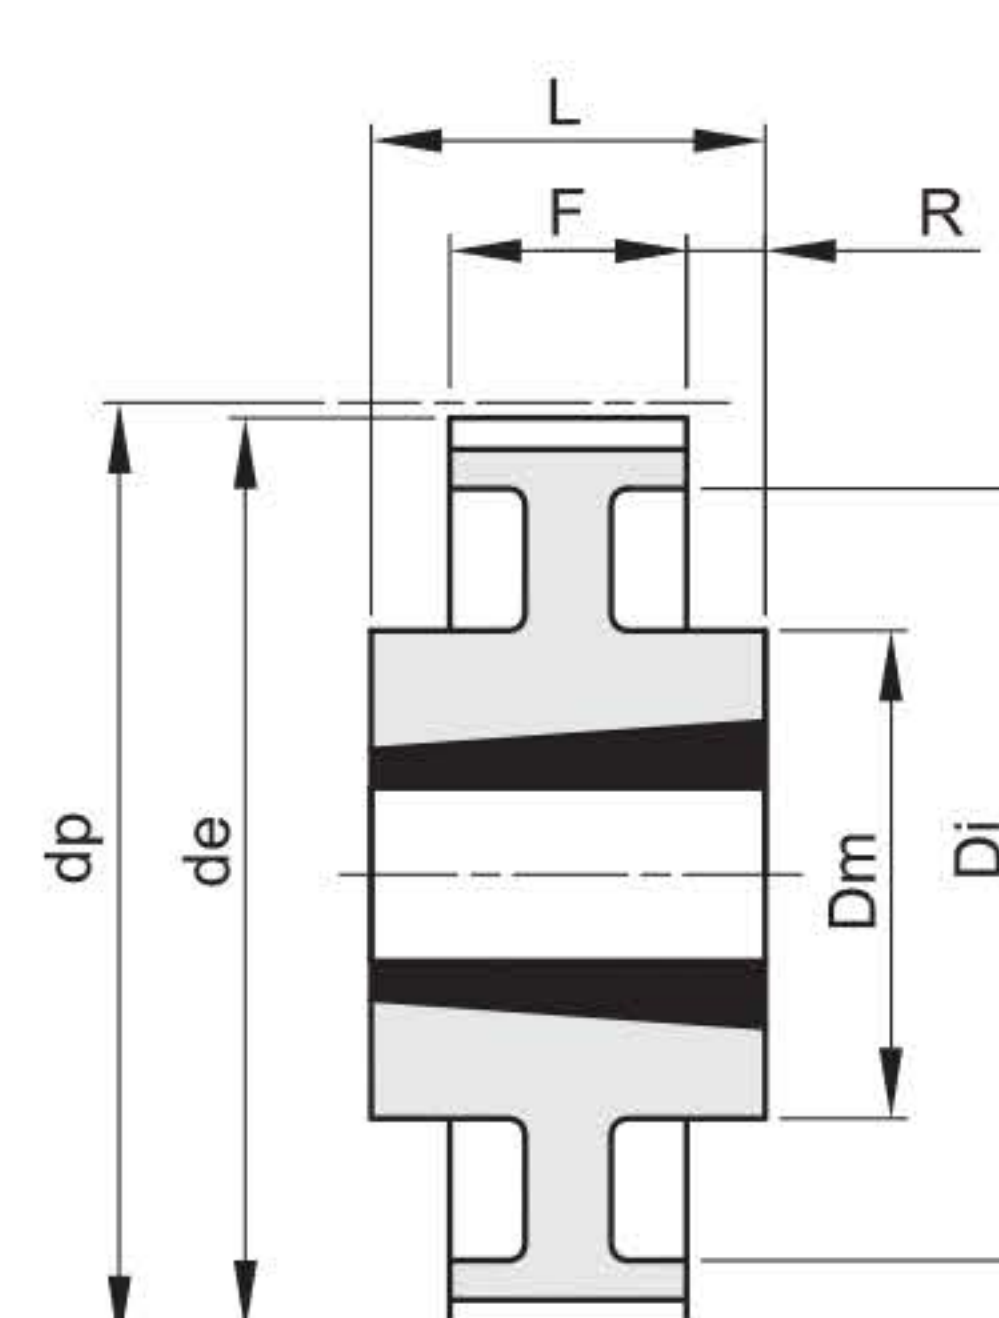

13

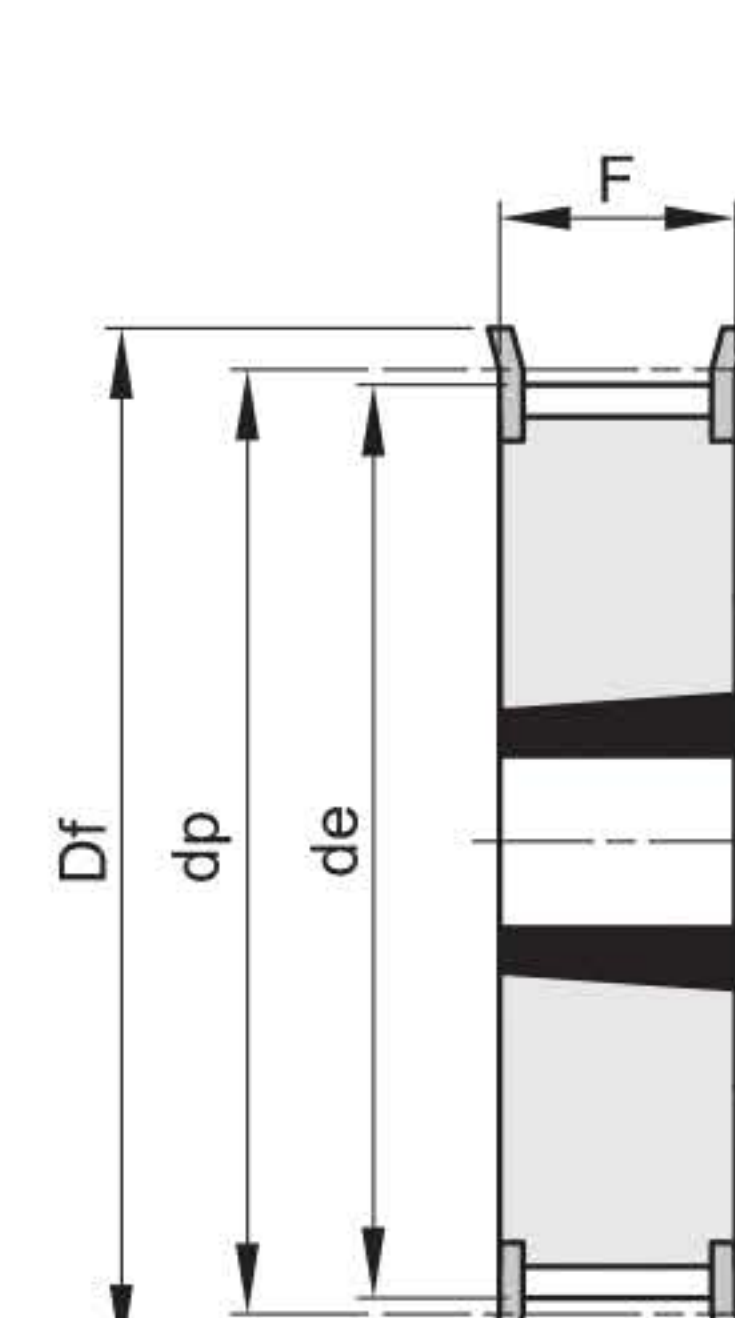


15F

codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 34 5M 15	15F	St	34	1008	25	54,11	52,97	57			22	22		213	0,20
B 36 5M 15	15F	St	36	1108	25	57,30	56,15	60			22	22		214	0,25
B 38 5M 15	15F	St	38	1108	25	60,48	59,34	66			22	22		216	0,30
B 40 5M 15	15F	St	40	1108	25	63,66	62,52	71			22	22		217	0,35
B 44 5M 15	15F	St	44	1108	25	70,03	68,89	75			22	22		218	0,40
B 48 5M 15	10F	St	48	1210	32	76,39	75,25	83	59		22	25	3	219	0,46
B 56 5M 15	10F	St	56	1210	32	89,13	87,99	93	70		22	25	3	222	0,60
B 64 5M 15	10F	St	64	1210	32	101,86	100,72	106	80		22	25	3	224	0,80
B 72 5M 15	10	St	72	1610	42	114,59	113,45		92		22	25	3		1,20
B 80 5M 15	10	St	80	1610	42	127,32	126,18		92		22	25	3		1,76
B 90 5M 15	10	St	90	1610	42	143,24	142,10		92		22	25	3		2,32
B 112 5M 15	10	St	112	2012	50	178,25	177,11		110		20	32	12		3,72
B 136 5M 15	13	St	136	2012	50	216,45	215,31		110	199	20	32	6		3,82


8M

Passo 8 mm


Per cinghie larghezza 20 mm

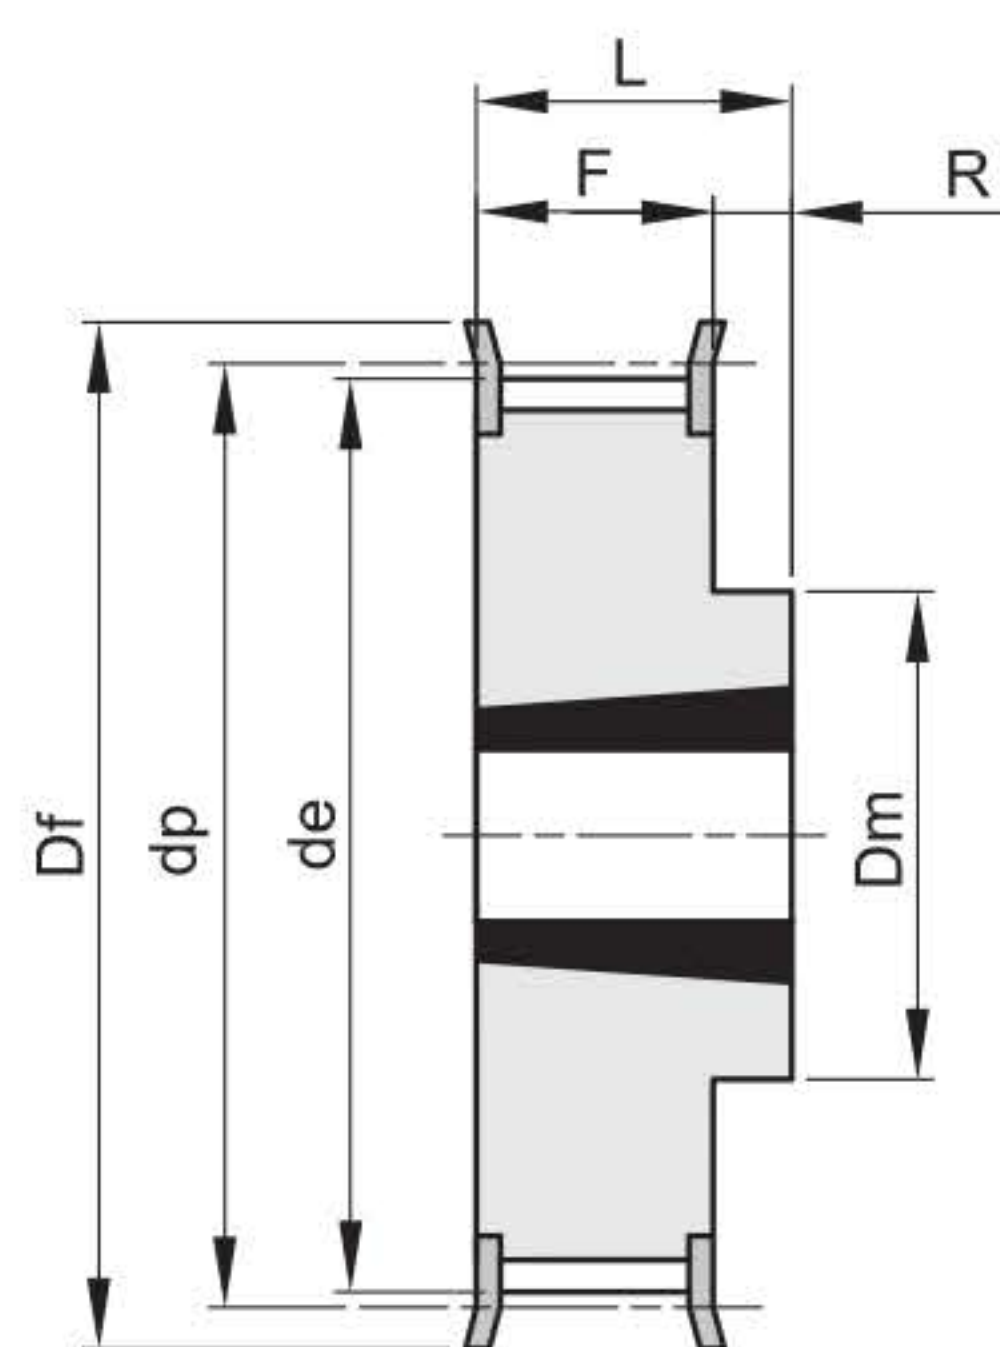


10F

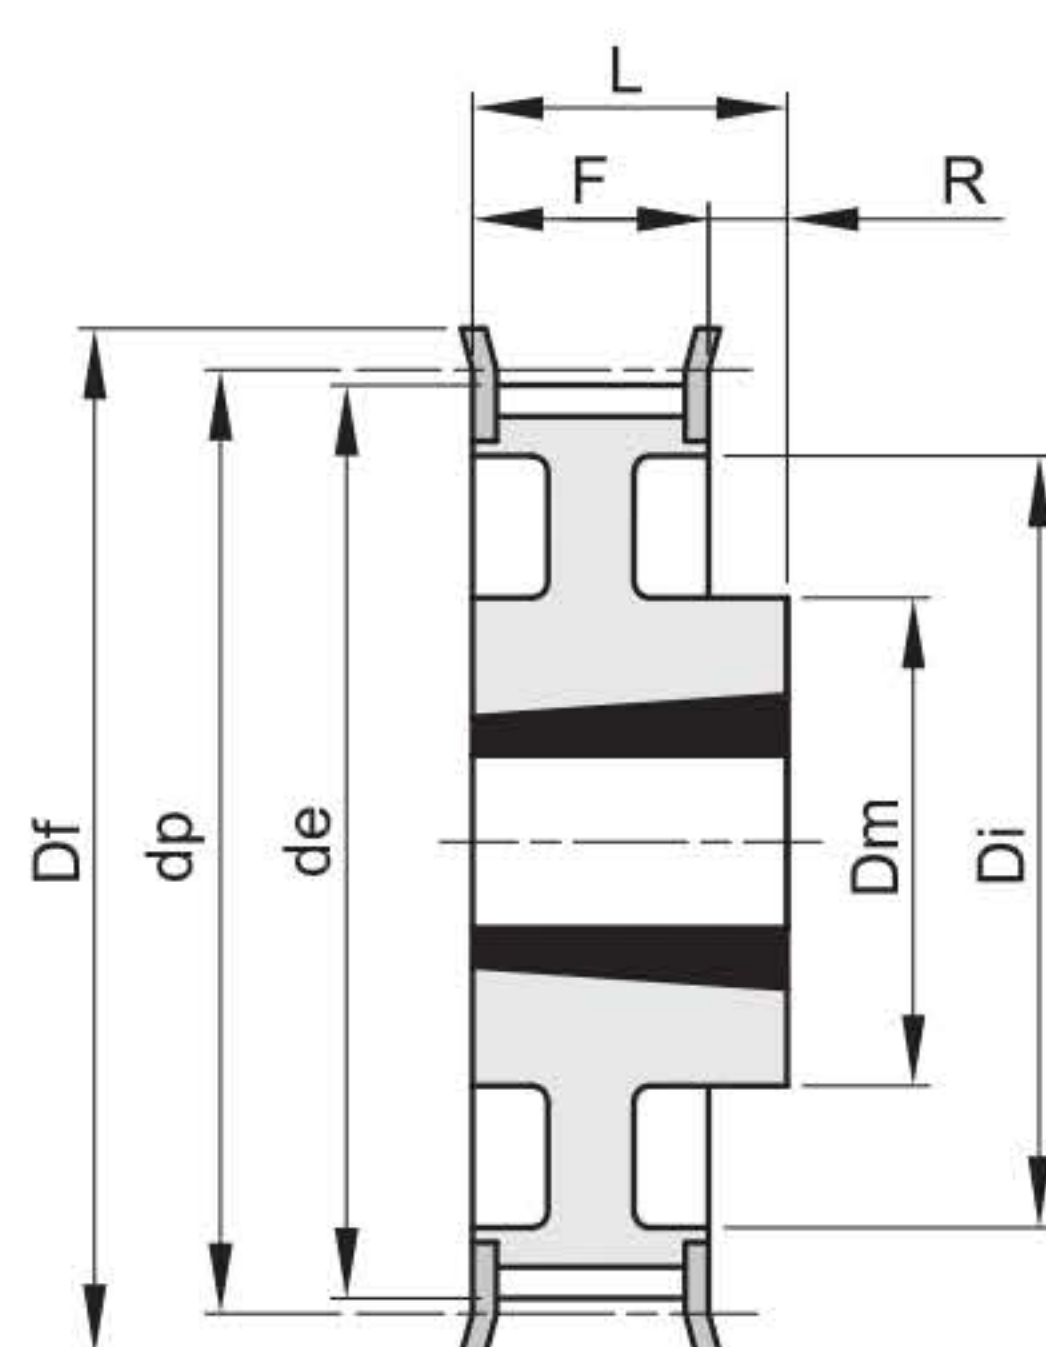

11F

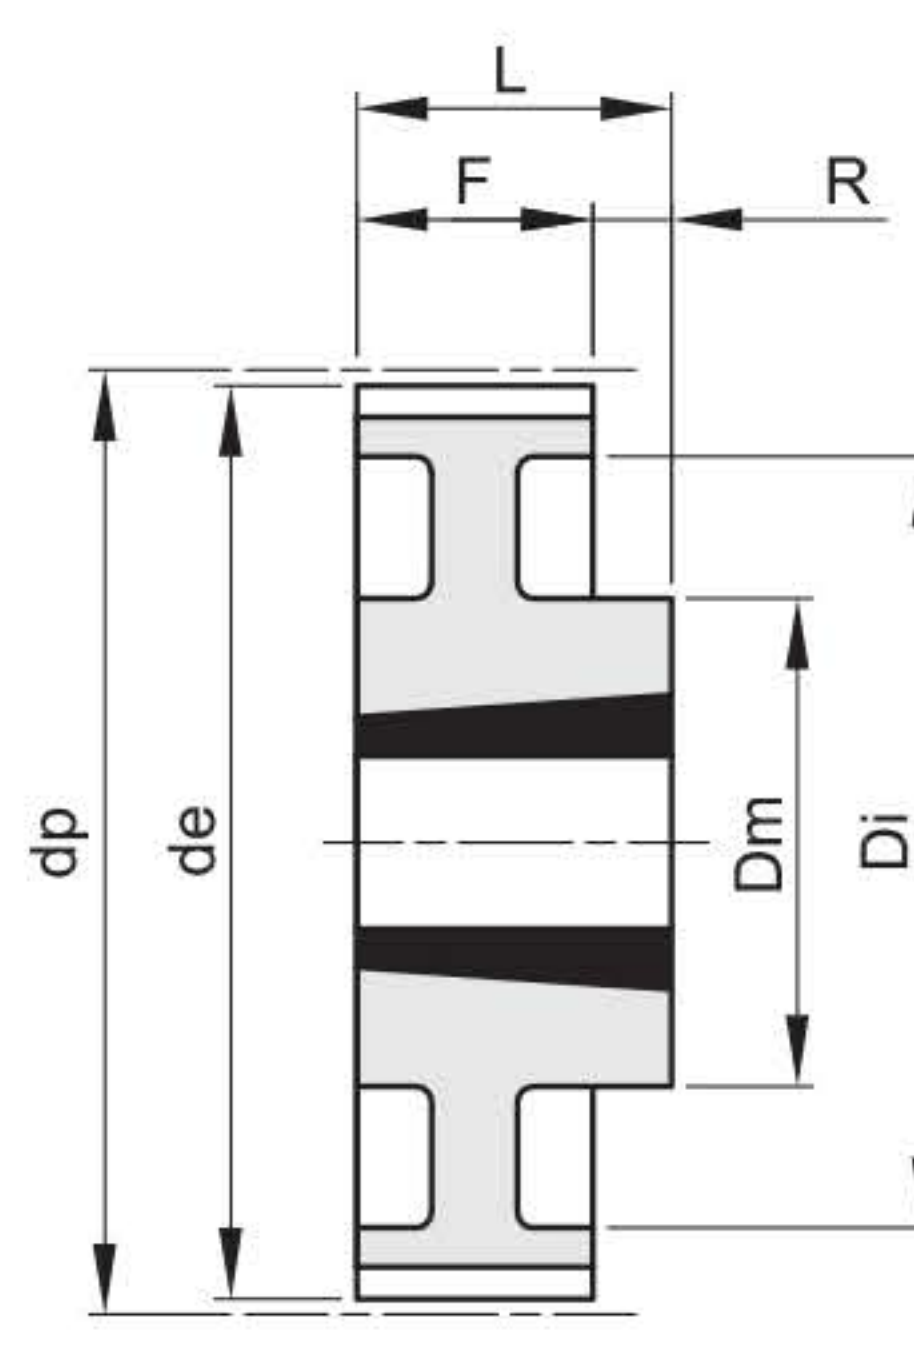

11

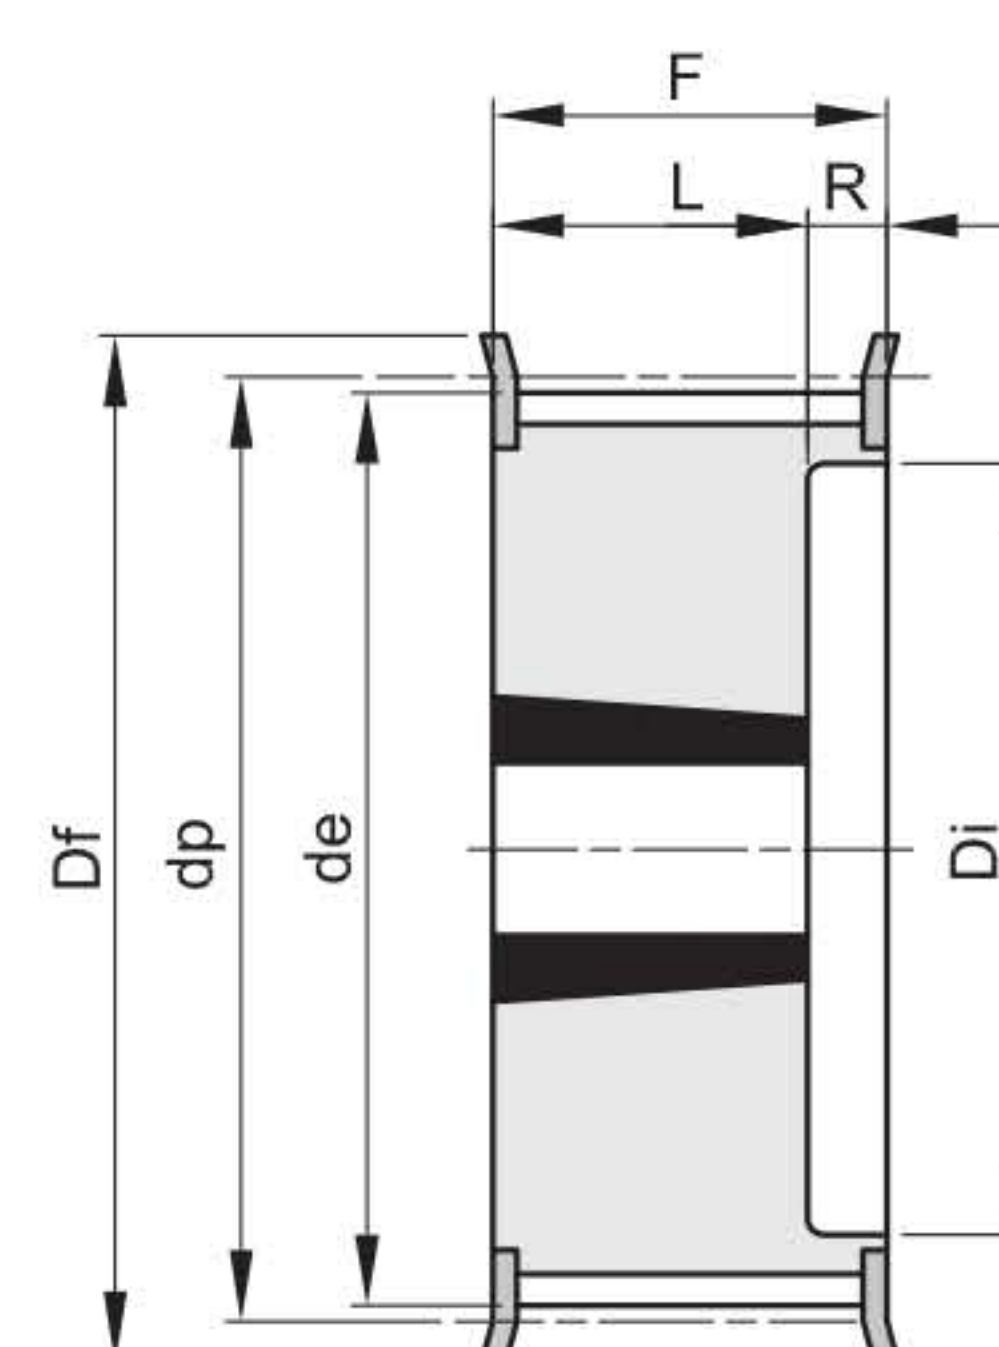


16F

codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 22 8M 20	16F	St	22	1008	25	56,02	54,65	60		37	28	22	6	308	0,25
B 24 8M 20	16F	St	24	1108	25	61,11	59,74	66		44	28	22	6	310	0,30
B 26 8M 20	16F	St	26	1108	25	66,21	64,84	71		45	28	22	6	311	0,36
B 28 8M 20	16F	St	28	1108	25	71,30	70,08	75		50	28	22	6	312	0,45
B 30 8M 20	16F	St	30	1108	25	76,39	75,13	83		58	28	22	6	314	0,55
B 32 8M 20	16F	St	32	1610	42	81,49	80,16	87		63	28	25	3	315	0,43
B 34 8M 20	16F	St	34	1610	42	86,58	85,21	91		64	28	25	3	316	0,57
B 36 8M 20	16F	St	36	1610	42	91,67	90,30	98		68	28	25	3	319	0,70
B 38 8M 20	16F	St	38	1610	42	96,77	95,39	103		72	28	25	3	320	0,82
B 40 8M 20	16F	St	40	1610	42	101,86	100,49	106		76	28	25	3	321	1,10
B 44 8M 20	10F	St	44	2012	50	112,05	110,67	119	92		28	32	4	325	1,20
B 48 8M 20	10F	St	48	2012	50	122,23	120,86	127	96		28	32	4	327	1,65
B 56 8M 20	10F	St	56	2012	50	142,60	141,23	148	110		28	32	4	333	2,50
B 64 8M 20	11F	St	64	2012	50	162,97	161,60	168	110	137	28	32	4	338	2,60
B 72 8M 20	11F	St	72	2012	50	183,35	181,97	192	110	158	28	32	4	340	3,40
B 80 8M 20	11	GG	80	2012	50	203,72	202,35		110	180	28	32	4		3,60
B 90 8M 20	11	GG	90	2012	50	229,18	227,81		110	204	28	32	4		4,10

8M

Passo 8 mm

Per cinghie larghezza 30 mm

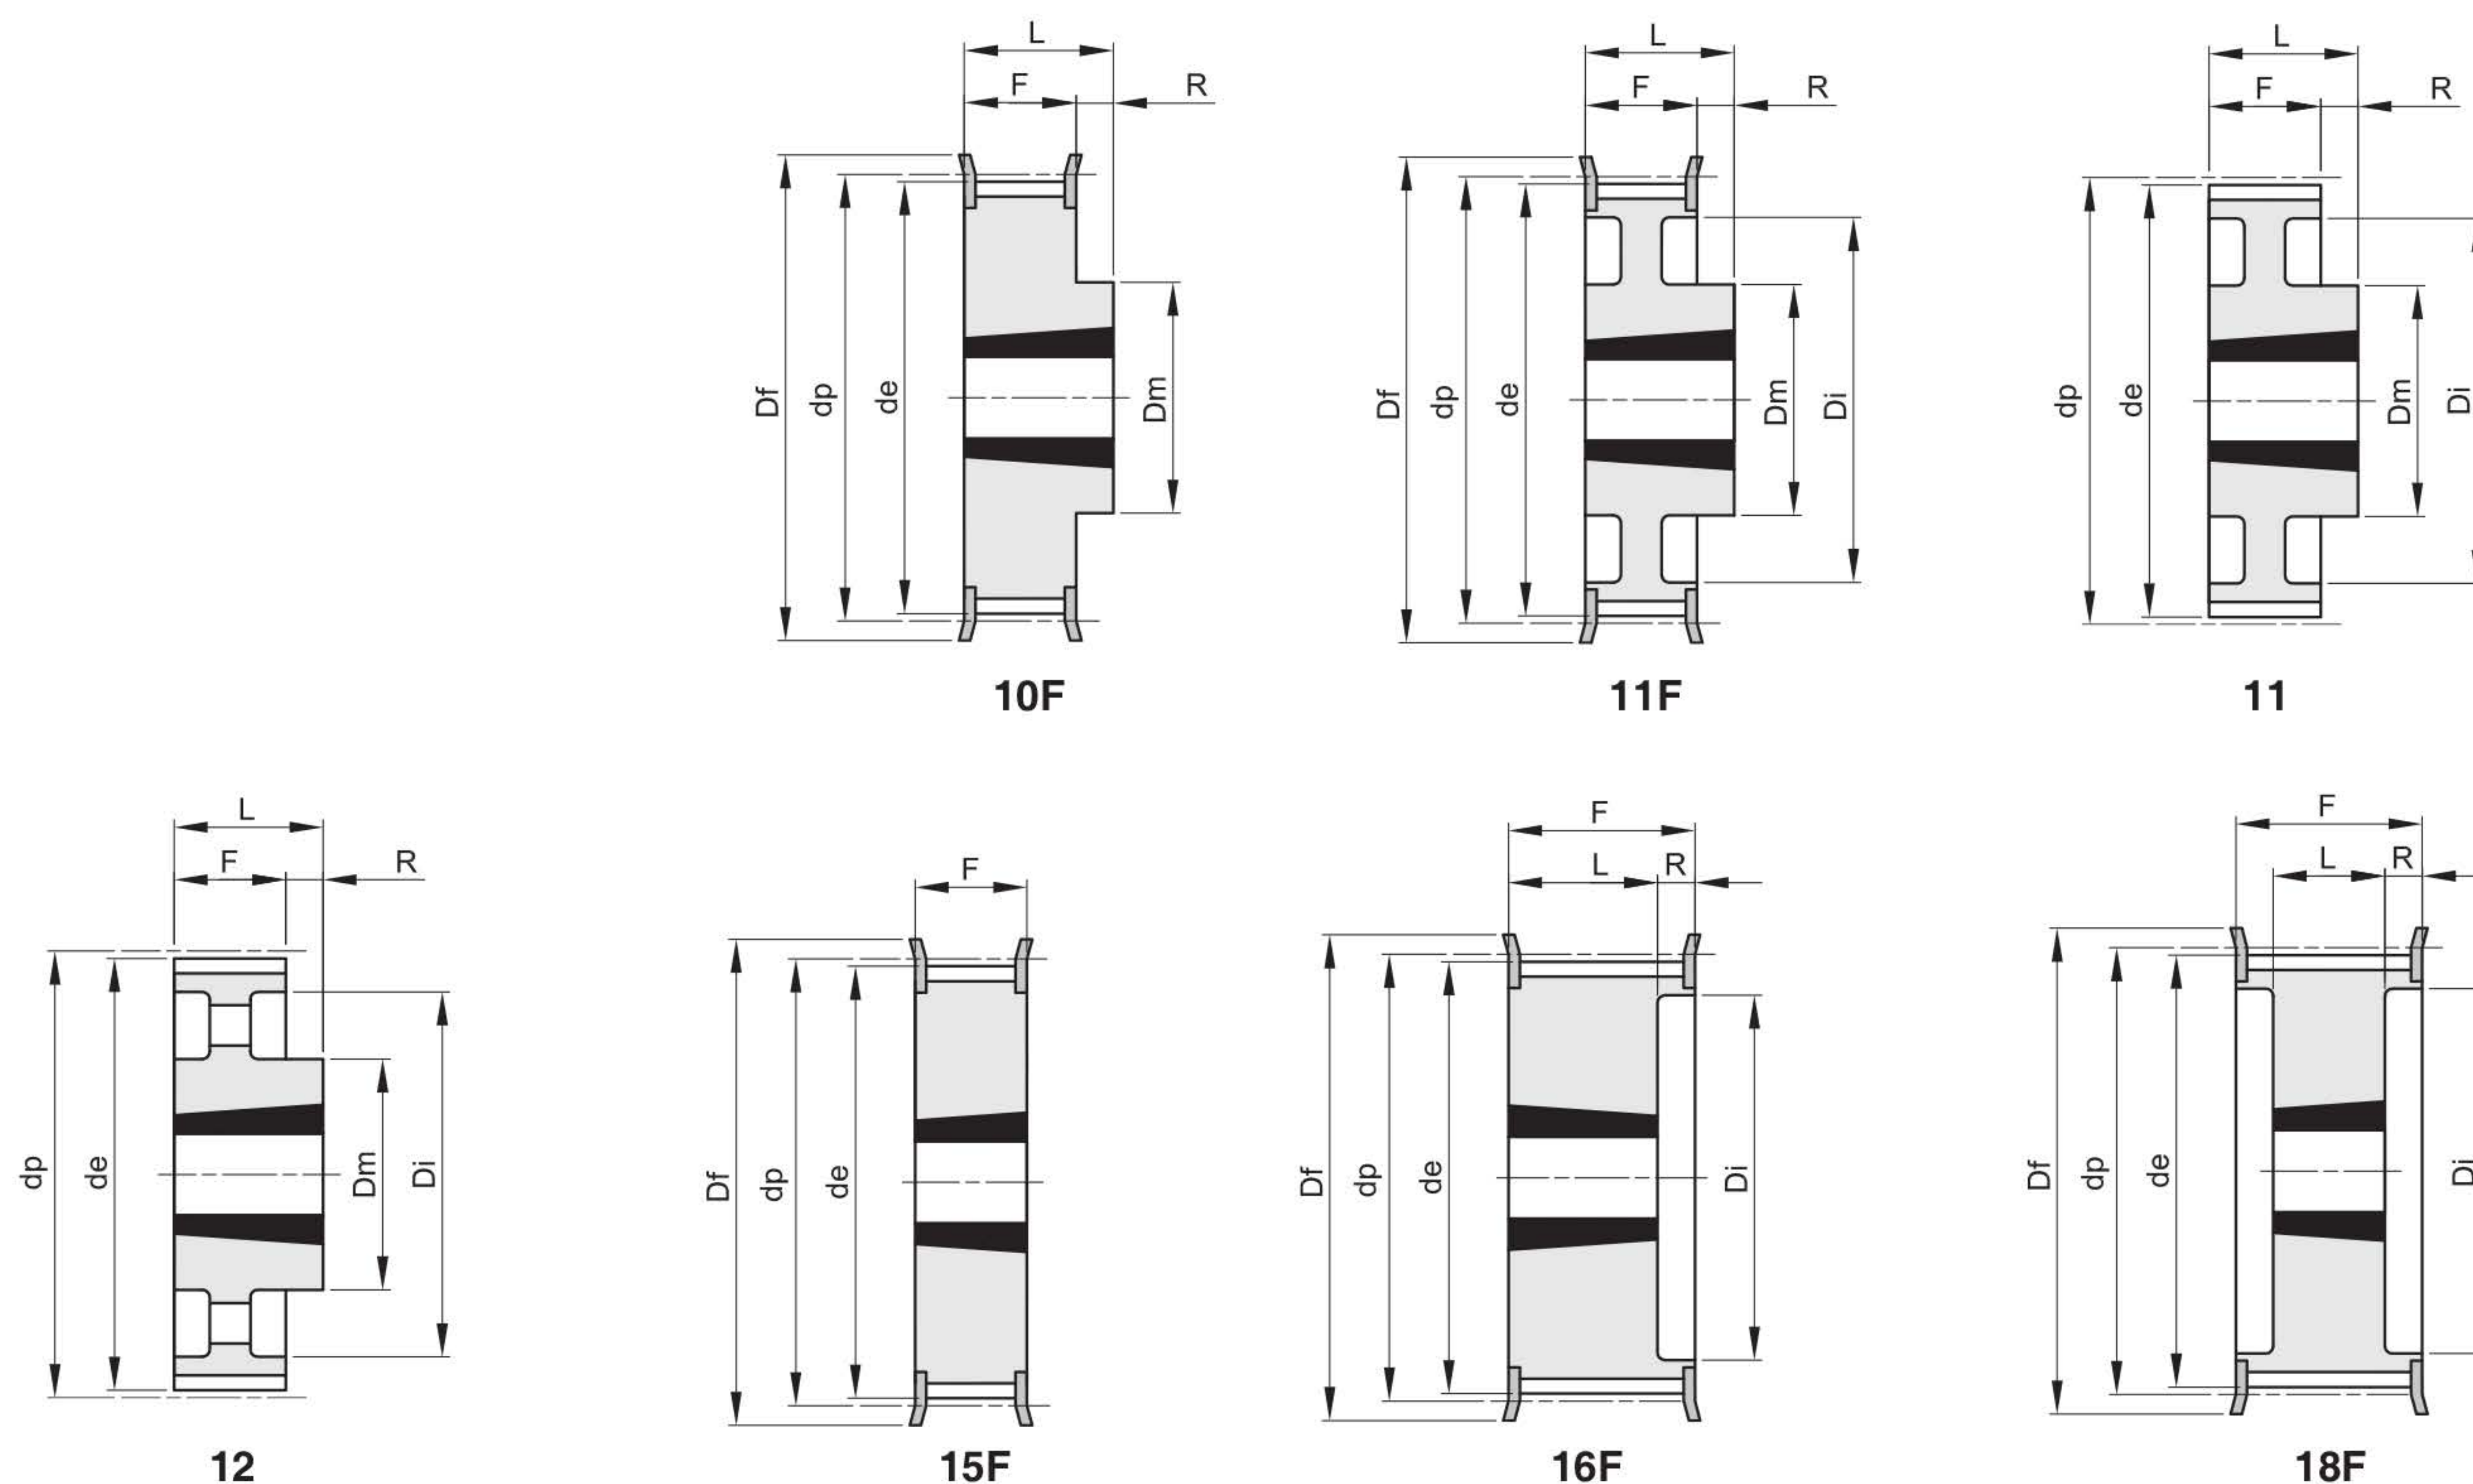


codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 22 8M 30	16F	St	22	1008	25	56,02	54,65	60		37	38	22	16	308	0,33
B 24 8M 30	16F	St	24	1108	25	61,11	59,74	66		44	38	22	16	310	0,40
B 26 8M 30	16F	St	26	1108	25	66,21	64,84	71		44	38	22	16	311	0,45
B 28 8M 30	16F	St	28	1210	32	71,30	70,08	75		50	38	25	13	312	0,50
B 30 8M 30	15F	St	30	1615	42	76,39	75,13	83			38	38		314	0,55
B 32 8M 30	15F	St	32	1615	42	81,49	80,16	87			38	38		315	0,60
B 34 8M 30	15F	St	34	1615	42	86,58	85,21	91			38	38		316	0,80
B 36 8M 30	15F	St	36	1615	42	91,67	90,30	98			38	38		319	1,00
B 38 8M 30	15F	St	38	1615	42	96,77	95,39	103			38	38		320	1,10
B 40 8M 30	15F	St	40	1615	42	101,86	100,49	106			38	38		321	1,34
B 44 8M 30	18F	St	44	2012	50	112,05	110,67	119		86	38	32	3	325	1,30
B 48 8M 30	18F	St	48	2012	50	122,23	120,86	127		90	38	32	3	327	1,80
B 56 8M 30	18F	St	56	2012	50	142,60	141,23	148		110	38	32	3	333	3,80
B 64 8M 30	10F	St	64	2517	60	162,97	161,60	168	125		38	45	7	338	4,30
B 72 8M 30	11F	St	72	2517	60	183,35	181,97	192	125	158	38	45	7	340	4,40
B 80 8M 30	11	GG	80	2517	60	203,72	202,35		125	180	38	45	7		4,65
B 90 8M 30	11	GG	90	2517	60	229,18	227,81		125	204	38	45	7		5,80
B 112 8M 30	12	GG	112	2517	60	285,21	283,83		125	254	38	45	7		6,20
B 144 8M 30	12	GG	144	2517	60	366,69	365,32		125	336	38	45	7		9,00

8M

Passo 8 mm

Per cinghie larghezza 50 mm

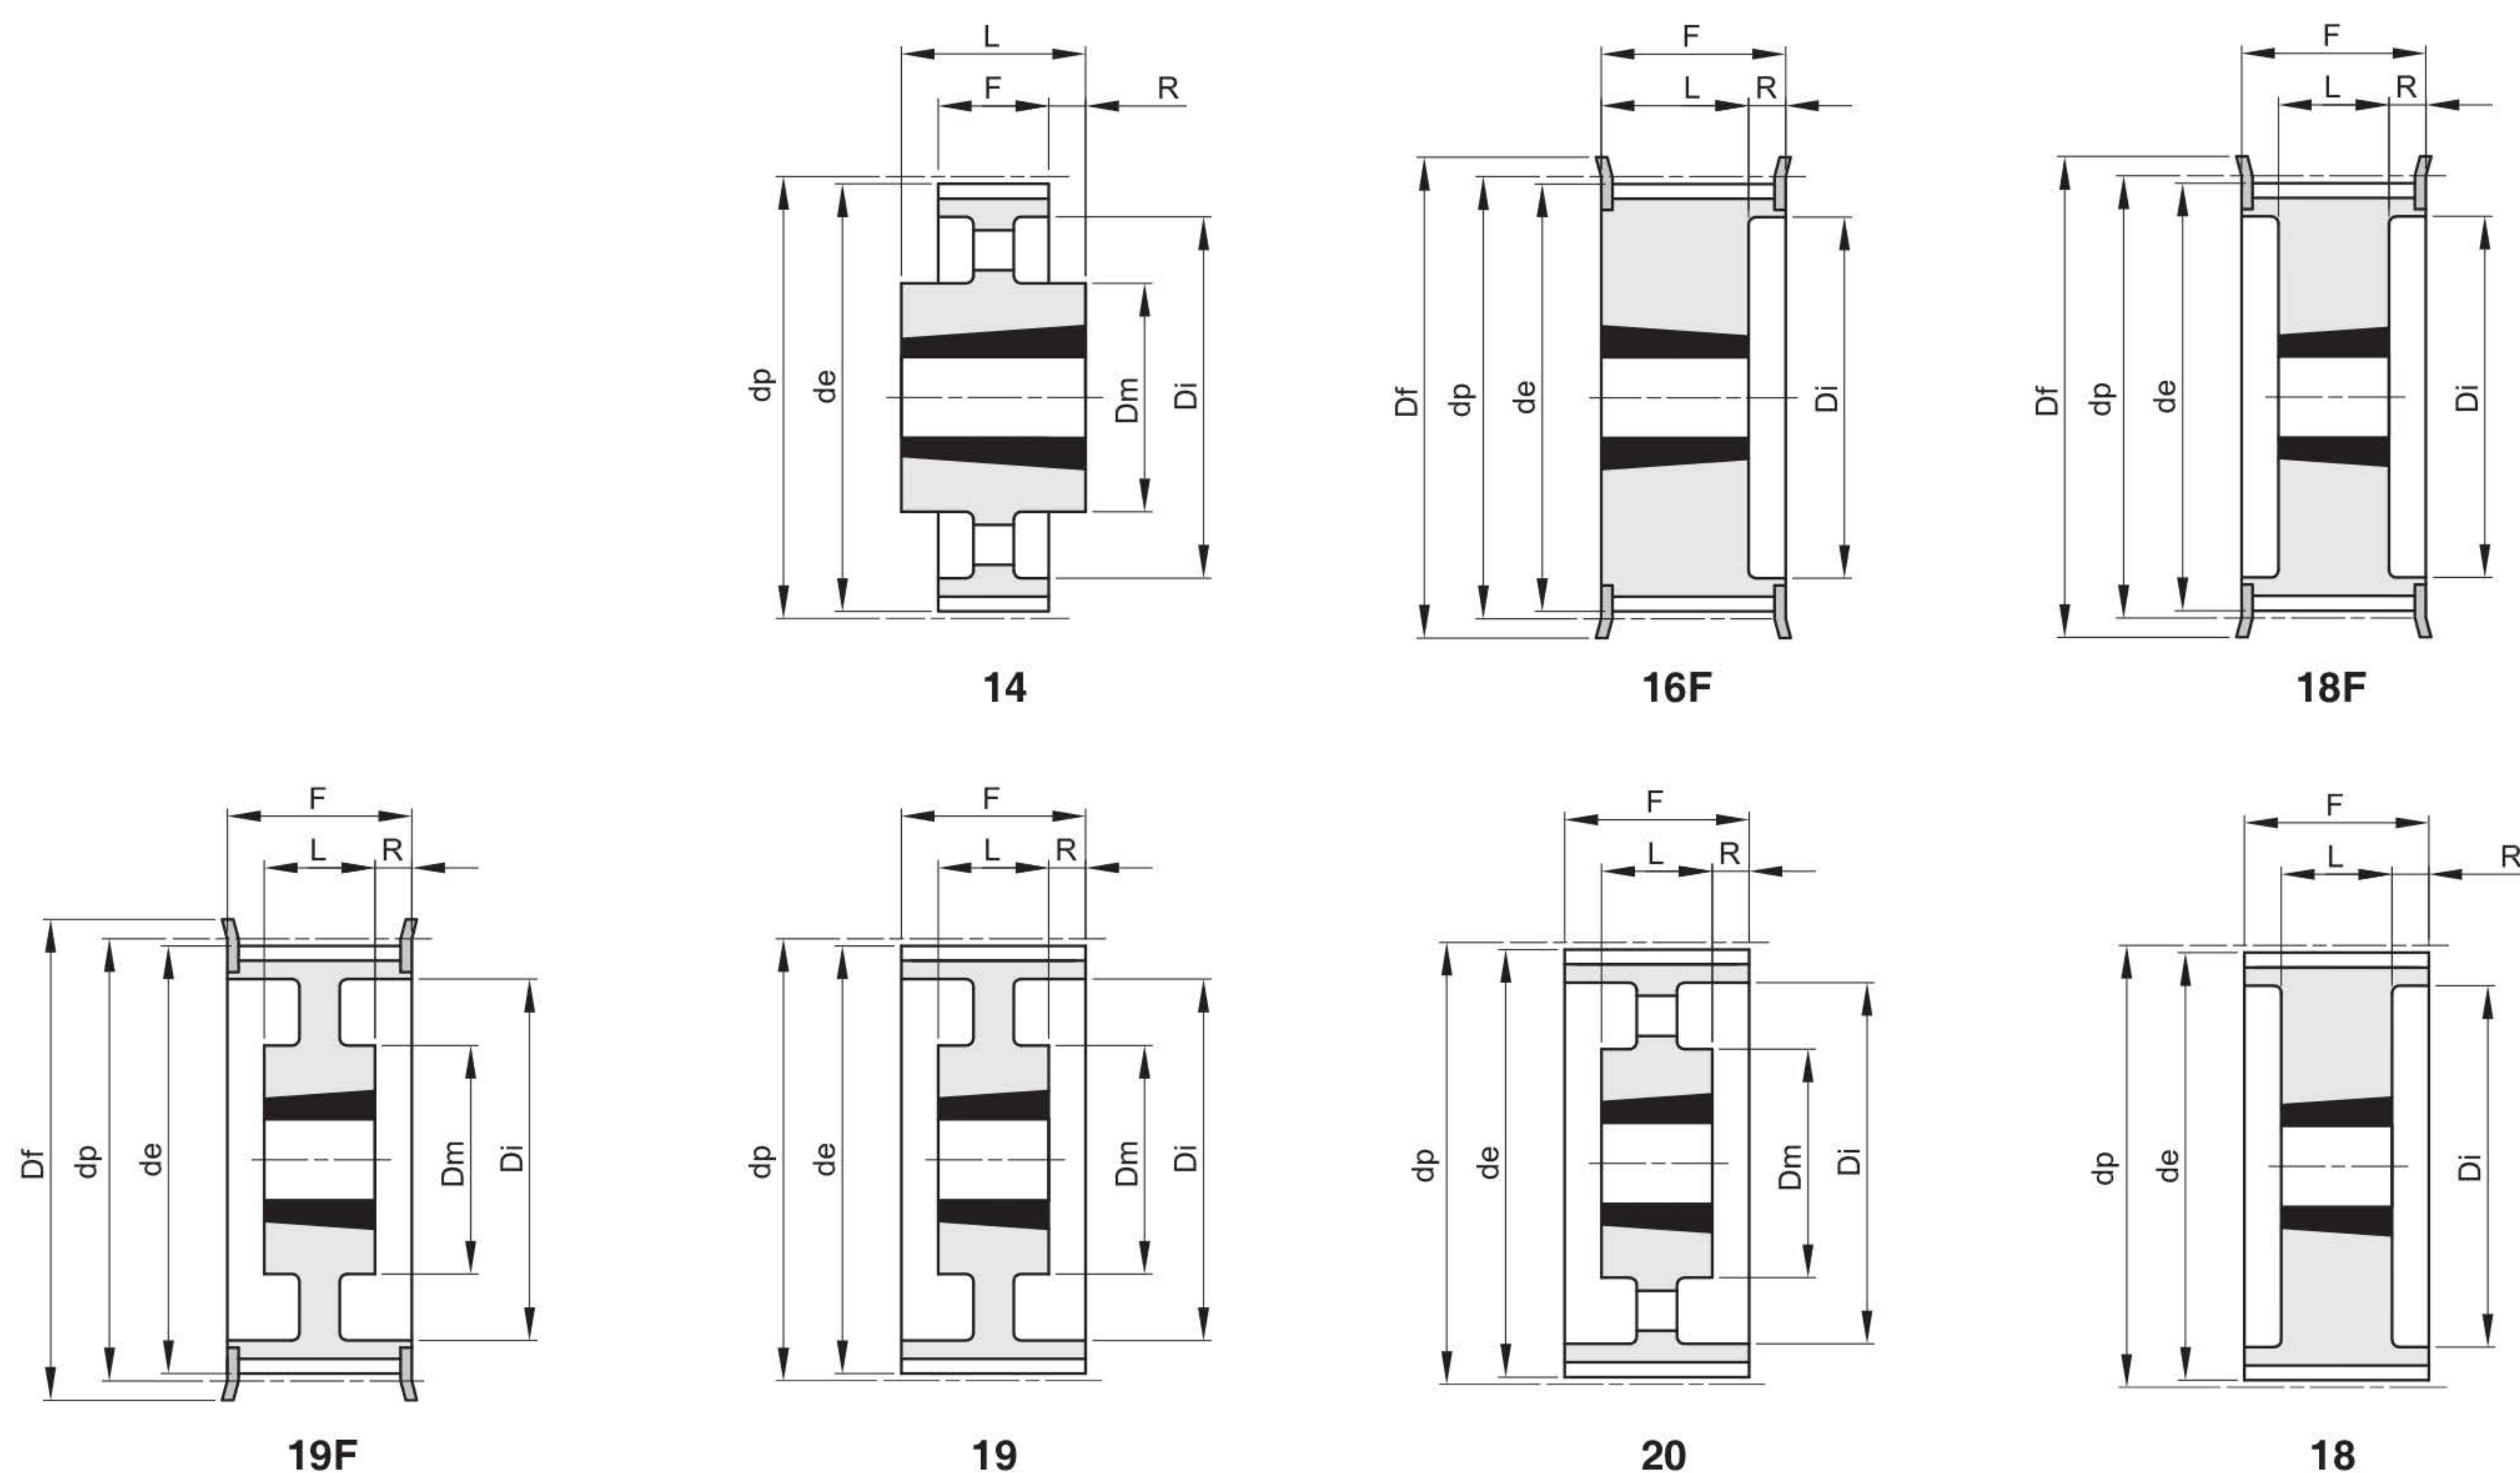


codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 28 8M 50	16F	St	28	1210	32	71,30	70,08	75		50	60	25	35	312	0,60
B 30 8M 50	16F	St	30	1615	42	76,39	75,13	83		58	60	38	22	314	0,65
B 32 8M 50	16F	St	32	1615	42	81,49	80,16	87		63	60	38	22	315	0,80
B 34 8M 50	16F	St	34	1615	42	86,58	85,21	91		65	60	38	22	316	1,08
B 36 8M 50	16F	St	36	1615	42	91,67	90,30	98		68	60	38	22	319	1,35
B 38 8M 50	16F	St	38	1615	42	96,77	95,39	103		72	60	38	22	320	1,65
B 40 8M 50	18F	St	40	2012	50	101,86	100,49	106		80	60	32	14	321	1,70
B 44 8M 50	18F	St	44	2012	50	112,05	110,67	119		86	60	32	14	325	1,80
B 48 8M 50	18F	St	48	2012	50	122,23	120,86	127		95	60	32	14	327	2,35
B 56 8M 50	18F	St	56	2517	60	142,60	141,23	148		116	60	45	7,5	333	3,35
B 64 8M 50	18F	St	64	2517	60	162,97	161,60	168		136	60	45	7,5	338	4,90
B 72 8M 50	19F	St	72	2517	60	183,35	181,97	192	125	158	60	45	7,5	340	6,90
B 80 8M 50	18	GG	80	3020	75	203,72	202,35			180	60	51	4,5		8,90
B 90 8M 50	19	GG	90	3020	75	229,18	227,81		160	204	60	51	4,5		9,90
B 112 8M 50	19	GG	112	3020	75	285,21	283,83		170	254	60	51	4,5		12,10
B 144 8M 50	20	GG	144	3020	75	366,69	365,32		170	336	60	51	4,5		15,40
B 168 8M 50	14	GG	168	3525	90	427,81	426,44		198	395	60	65	2,5		22,80
B 192 8M 50	14	GG	192	3525	90	488,92	487,55		198	455	60	65	2,5		26,50

8M

Passo 8 mm

Per cinghie larghezza 85 mm

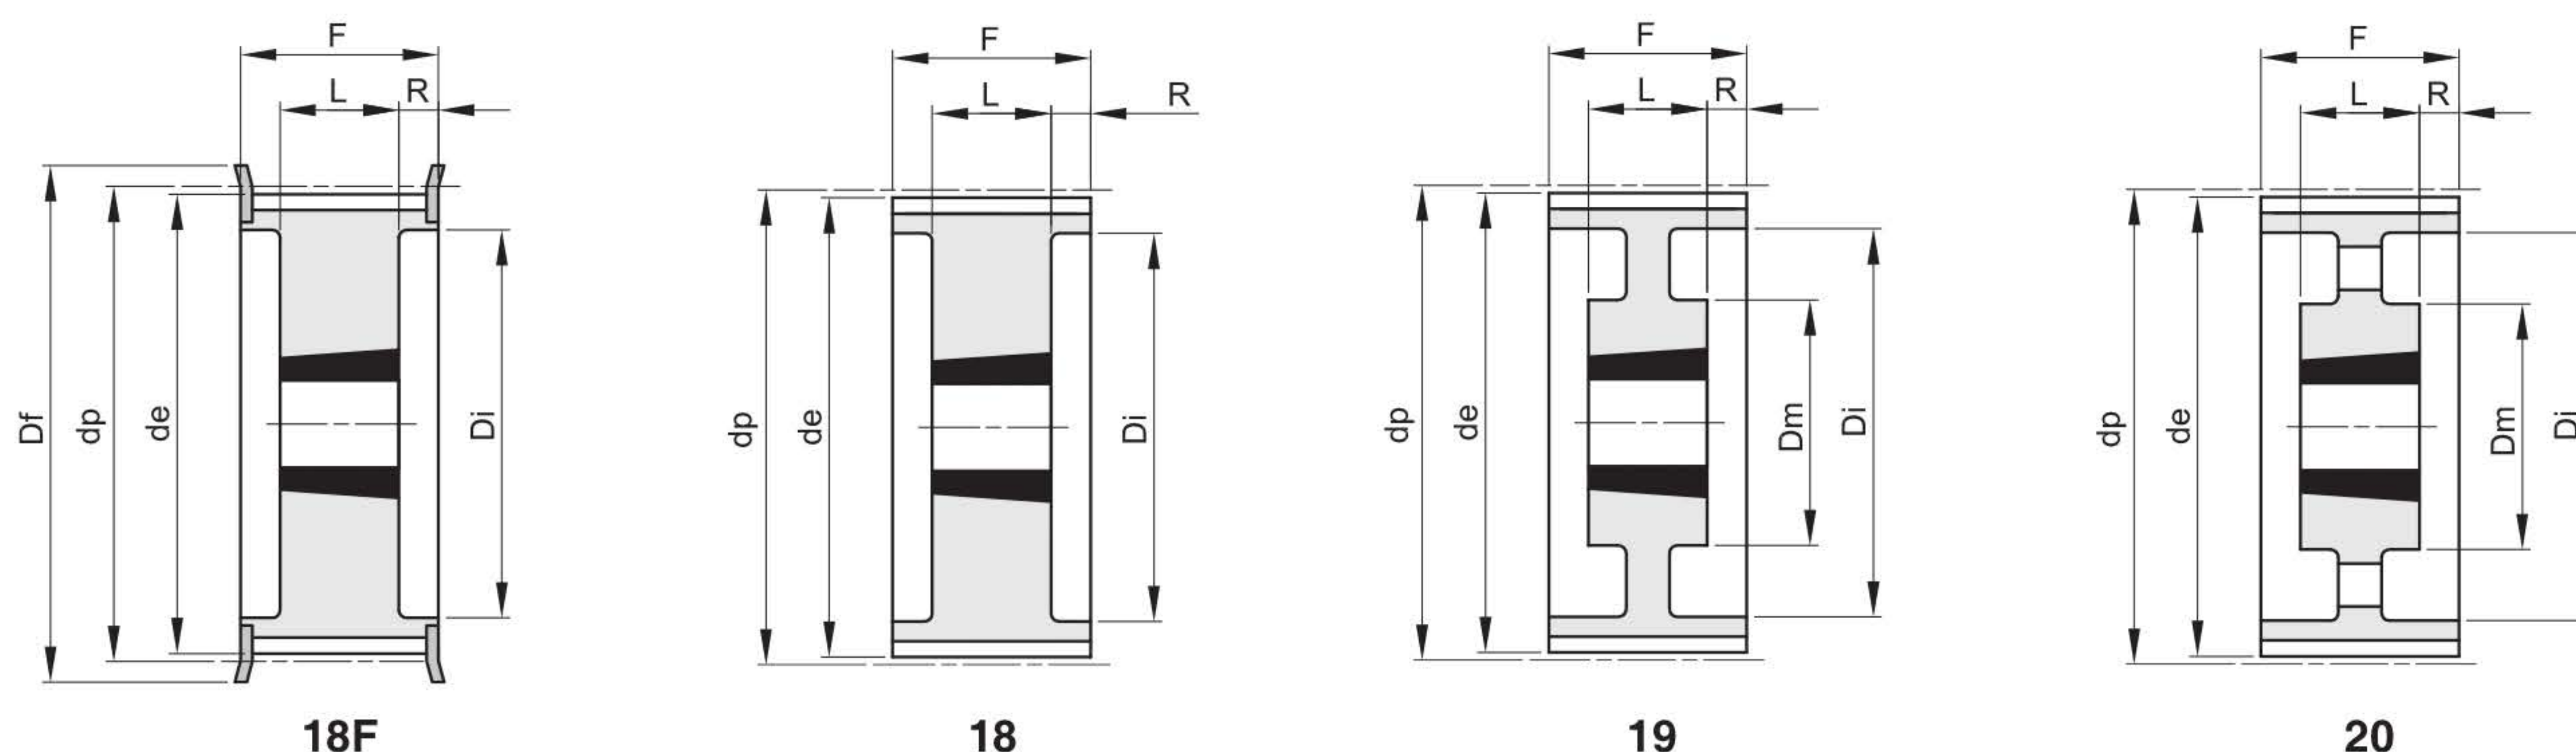


codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 34 8M 85	18F	St	34	1615	42	86,58	85,22	91		65	95	38	28,5	316	1,50
B 36 8M 85	18F	St	36	1615	42	91,67	90,30	98		68	95	38	28,5	319	1,90
B 38 8M 85	18F	St	38	1615	42	96,77	95,39	103		72	95	38	28,5	320	2,20
B 40 8M 85	18F	St	40	2012	50	101,86	100,49	106		80	95	32	31,5	321	1,90
B 44 8M 85	18F	St	44	2012	50	112,05	110,67	119		86	95	32	31,5	325	2,30
B 48 8M 85	18F	St	48	2517	60	122,23	120,86	127		97	95	45	25	327	2,70
B 56 8M 85	18F	St	56	2517	60	142,60	141,23	148		116	95	45	25	333	4,50
B 64 8M 85	18F	St	64	2517	60	162,97	161,60	168		136	95	45	25	338	6,30
B 72 8M 85	18F	St	72	3020	75	183,35	181,97	192		150	95	51	22	340	8,10
B 80 8M 85	18	GG	80	3020	75	203,72	202,35			180	95	51	22		10,20
B 90 8M 85	19	GG	90	3020	75	229,18	227,81		170	204	95	51	22		11,20
B 112 8M 85	19	GG	112	3020	75	285,21	283,83		170	254	95	51	22		15,00
B 144 8M 85	20	GG	144	3525	90	366,69	365,32		198	336	95	65	15		20,20
B 168 8M 85	20	GG	168	3525	90	427,81	426,44		198	395	95	65	15		22,40
B 192 8M 85	20	GG	192	3525	90	488,92	487,55		198	455	95	65	15		28,20


14M

Passo 14 mm


Per cinghie larghezza 40 mm

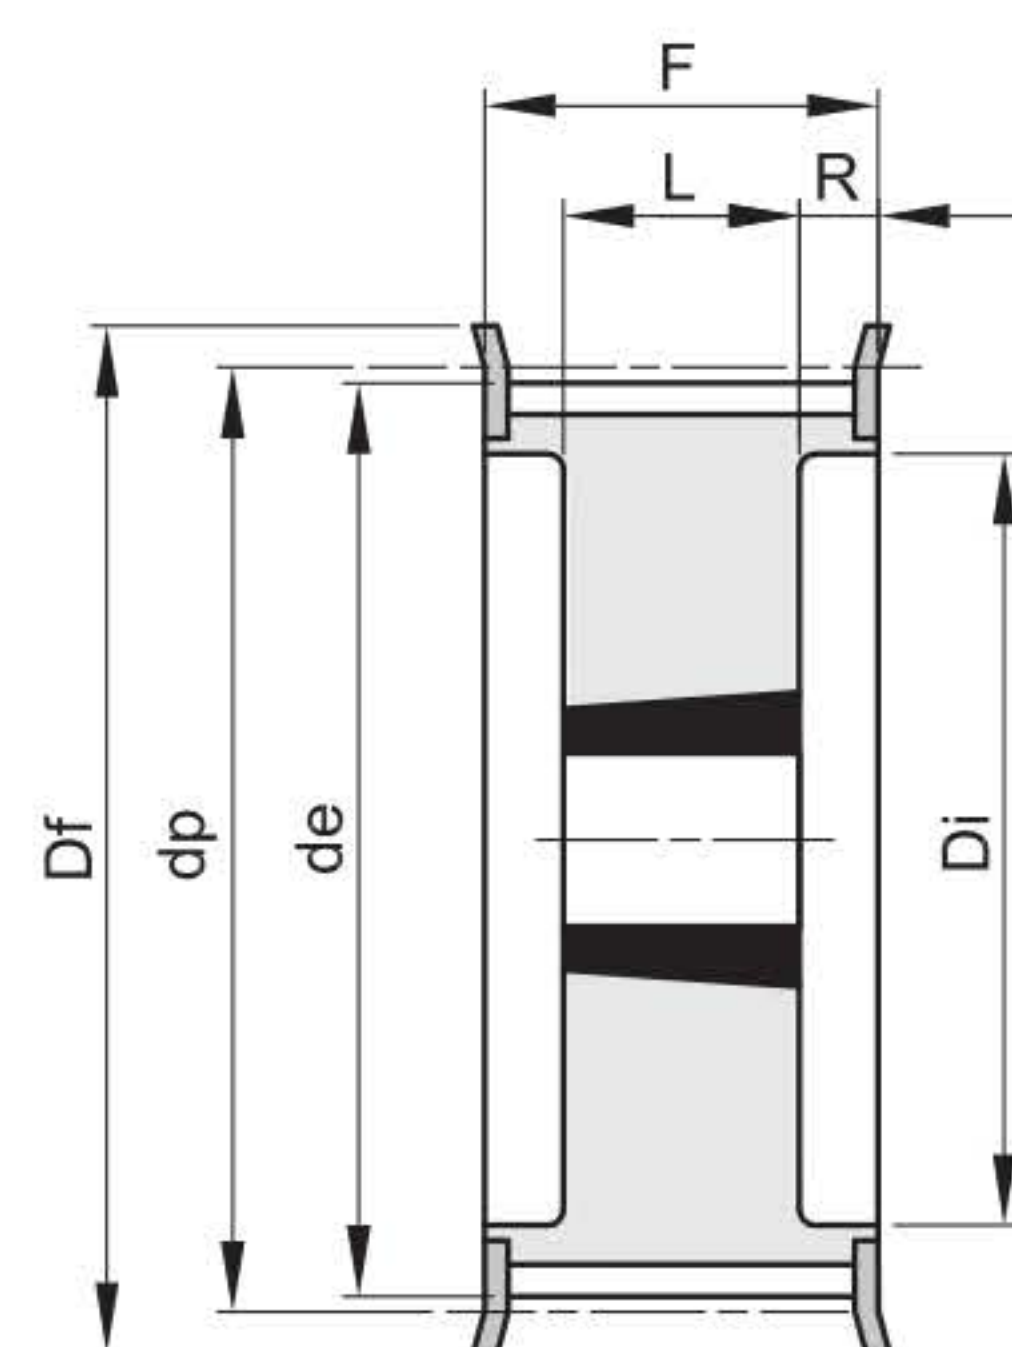


18F

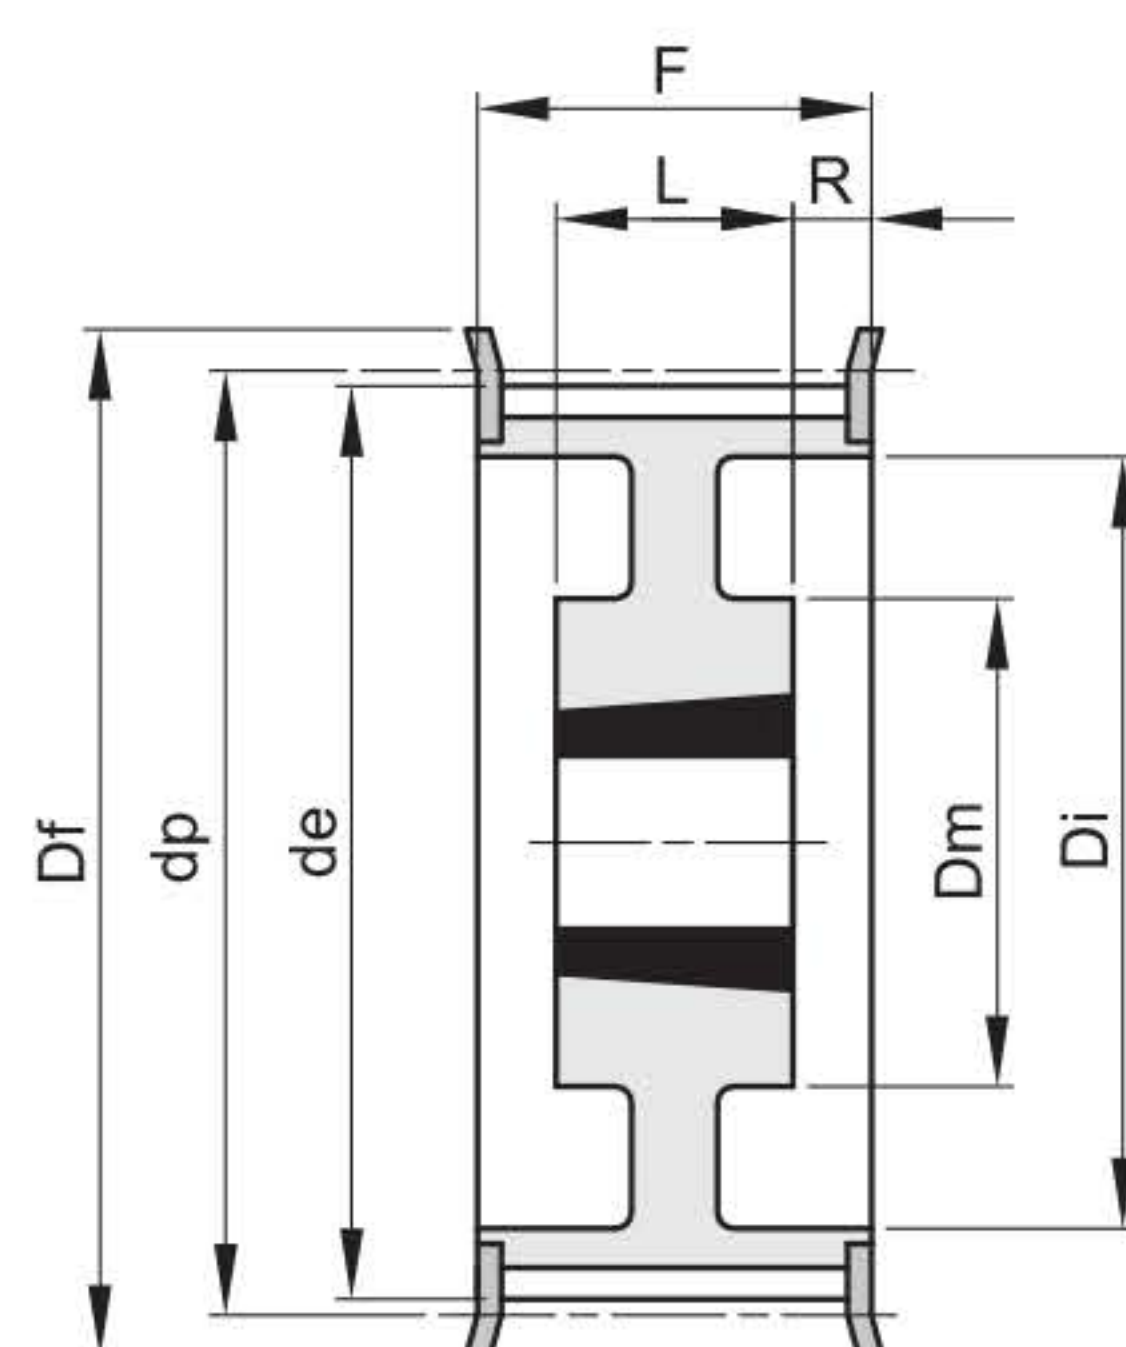

19F

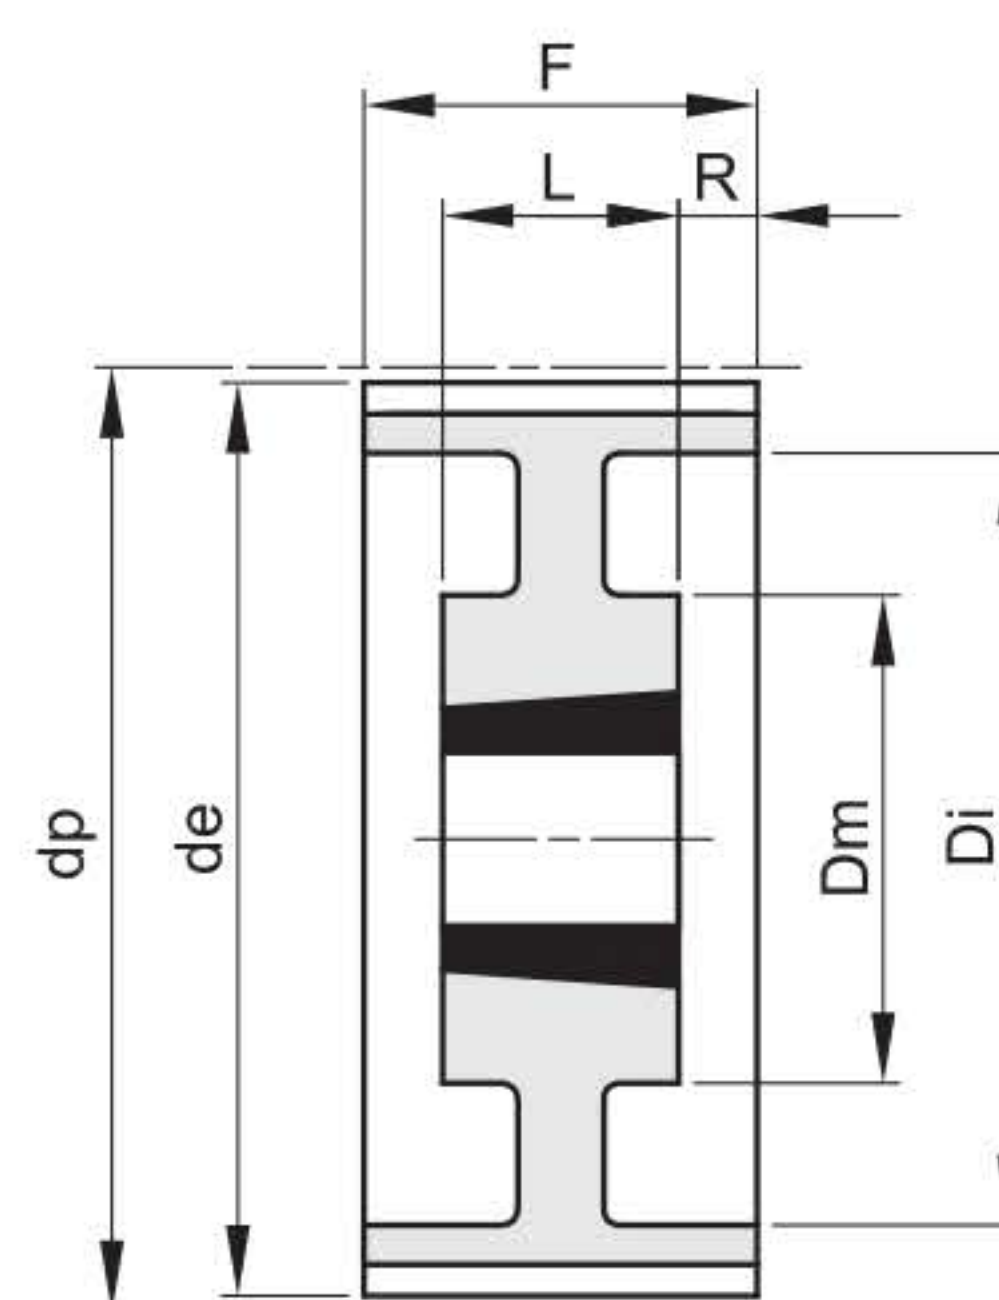

19

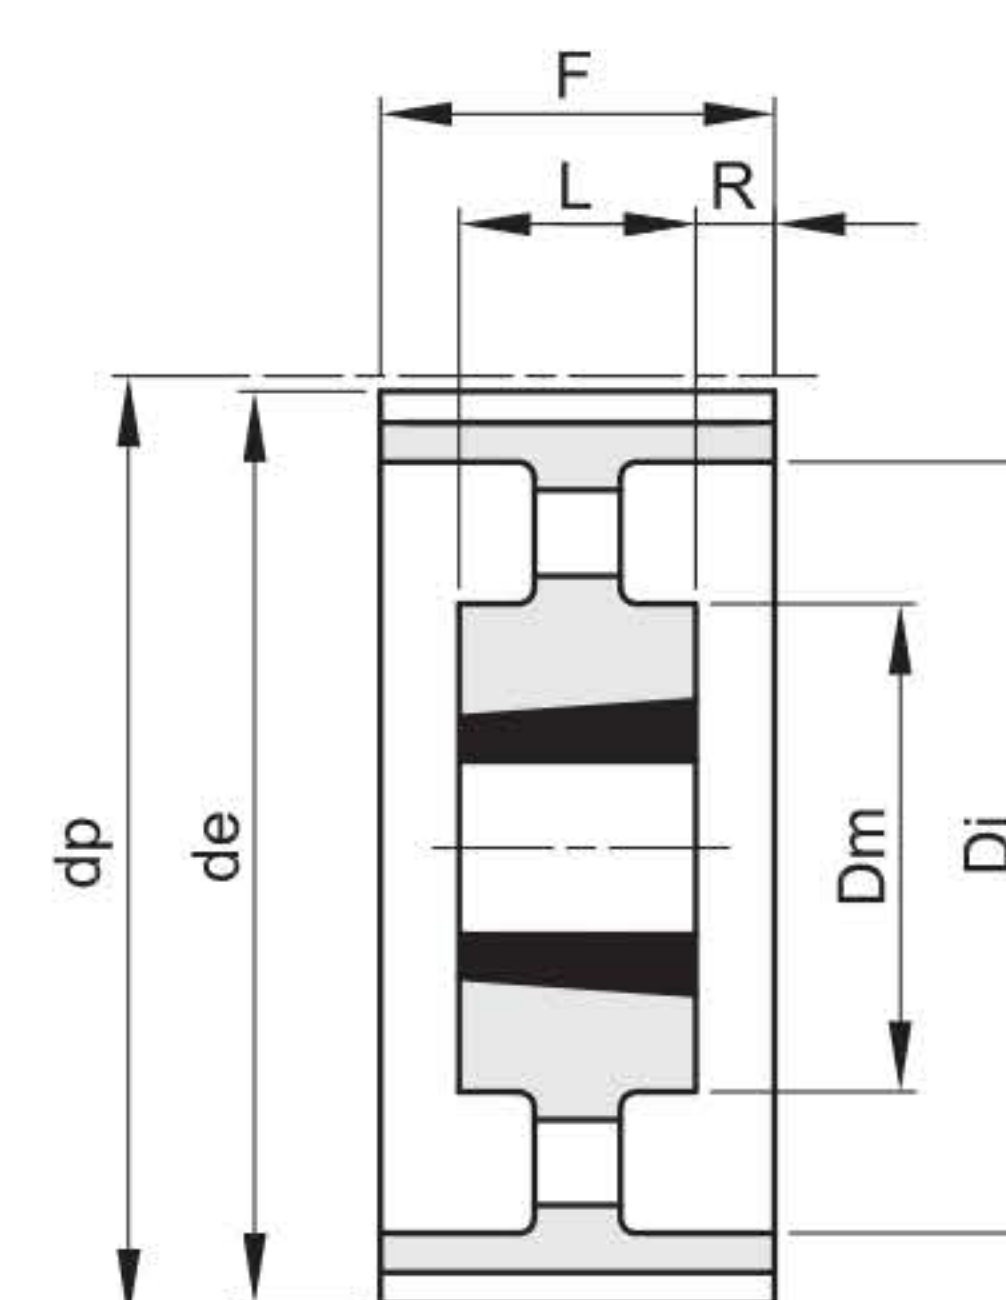


20

codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 28 14M 40	18F	St	28	2012	50	124,78	122,12	127		94	54	32	11	400	2,10
B 30 14M 40	18F	St	30	2012	50	133,69	130,99	138		98	54	32	11	401	2,70
B 32 14M 40	18F	St	32	2012	50	142,60	139,88	154		108	54	32	11	403	3,40
B 34 14M 40	18F	St	34	2517	60	151,52	148,79	160		110	54	45	4,5	404	3,90
B 36 14M 40	18F	St	36	2517	60	160,43	157,68	168		120	54	45	4,5	405	4,80
B 38 14M 40	18F	St	38	2517	60	169,34	166,60	183		130	54	45	4,5	406	5,40
B 40 14M 40	18F	St	40	2517	60	178,25	175,49	188		138	54	45	4,5	407	6,00
B 44 14M 40	18F	St	44	3020	75	196,08	193,28	211		155	54	51	1,5	411	7,50
B 48 14M 40	18F	St	48	3020	75	213,90	211,11	226		170	54	51	1,5	412	8,50
B 56 14M 40	18F	GG	56	3020	75	249,55	246,76	256		208	54	51	1,5	416	10,10
B 64 14M 40	19F	GG	64	3020	75	285,21	282,41	296	170	240	54	51	1,5	418	13,40
B 72 14M 40	19	GG	72	3020	75	320,86	318,06		170	280	54	51	1,5		15,00
B 80 14M 40	20	GG	80	3020	75	356,51	353,71		170	315	54	51	1,5		16,00
B 90 14M 40	20	GG	90	3020	75	401,07	398,28		170	360	54	51	1,5		18,00
B 112 14M 40	20	GG	112	3020	75	499,11	496,32		170	457	54	51	1,5		25,50
B 144 14M 40	20	GG	144	3020	75	641,71	638,92		170	600	54	51	1,5		32,00
B 168 14M 40	20	GG	168	3020	75	748,66	745,87		170	706	54	51	1,5		43,50
B 192 14M 40	20	GG	192	3020	75	855,62	852,82		170	813	54	51	1,5		49,50


14M

Passo 14 mm


Per cinghie larghezza 55 mm

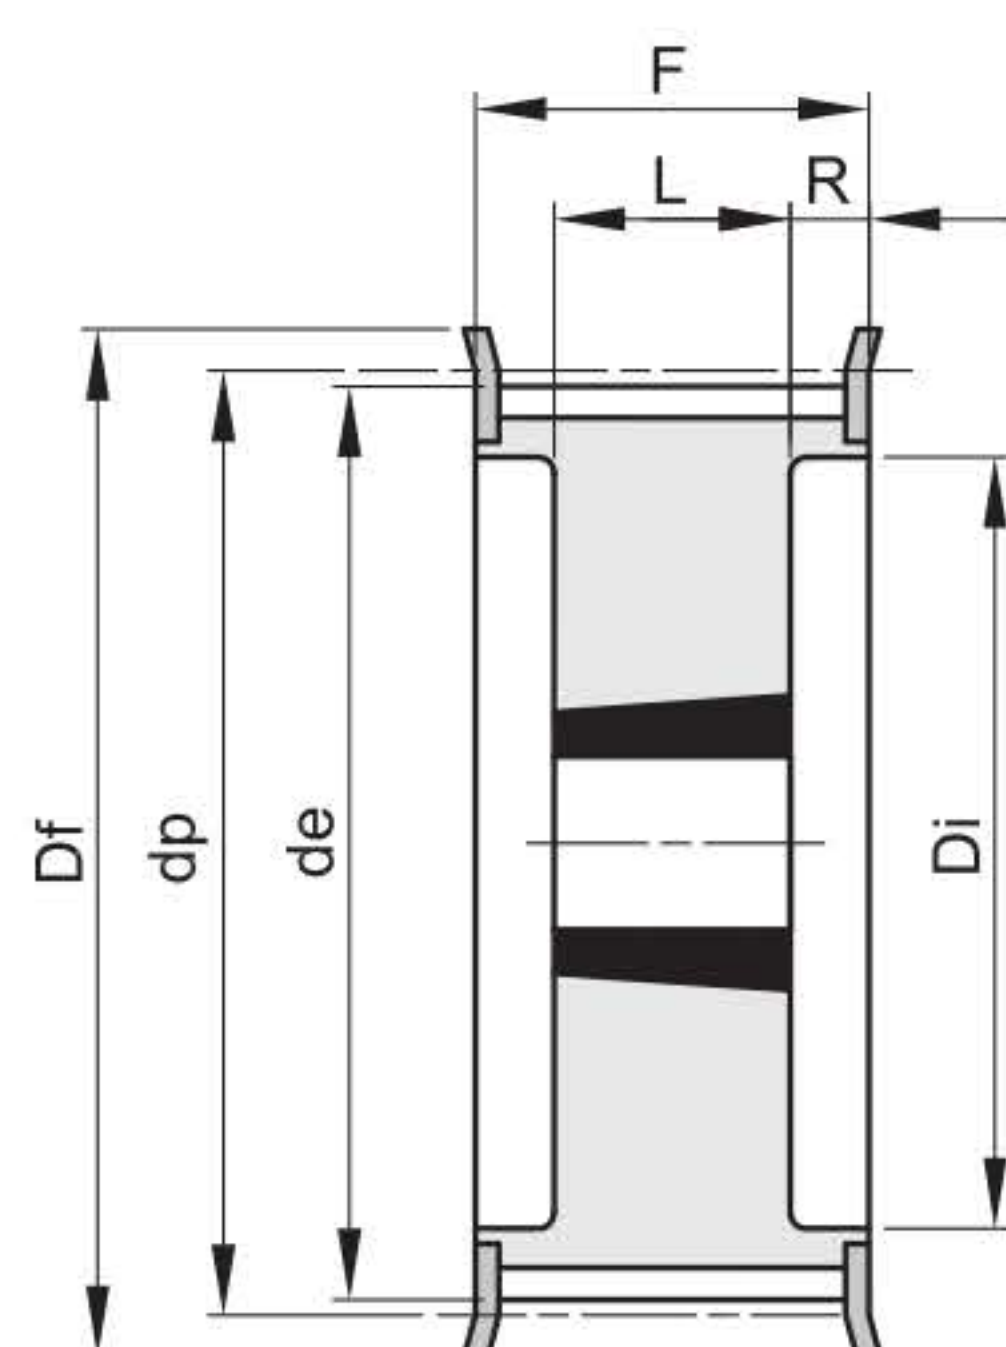


18F

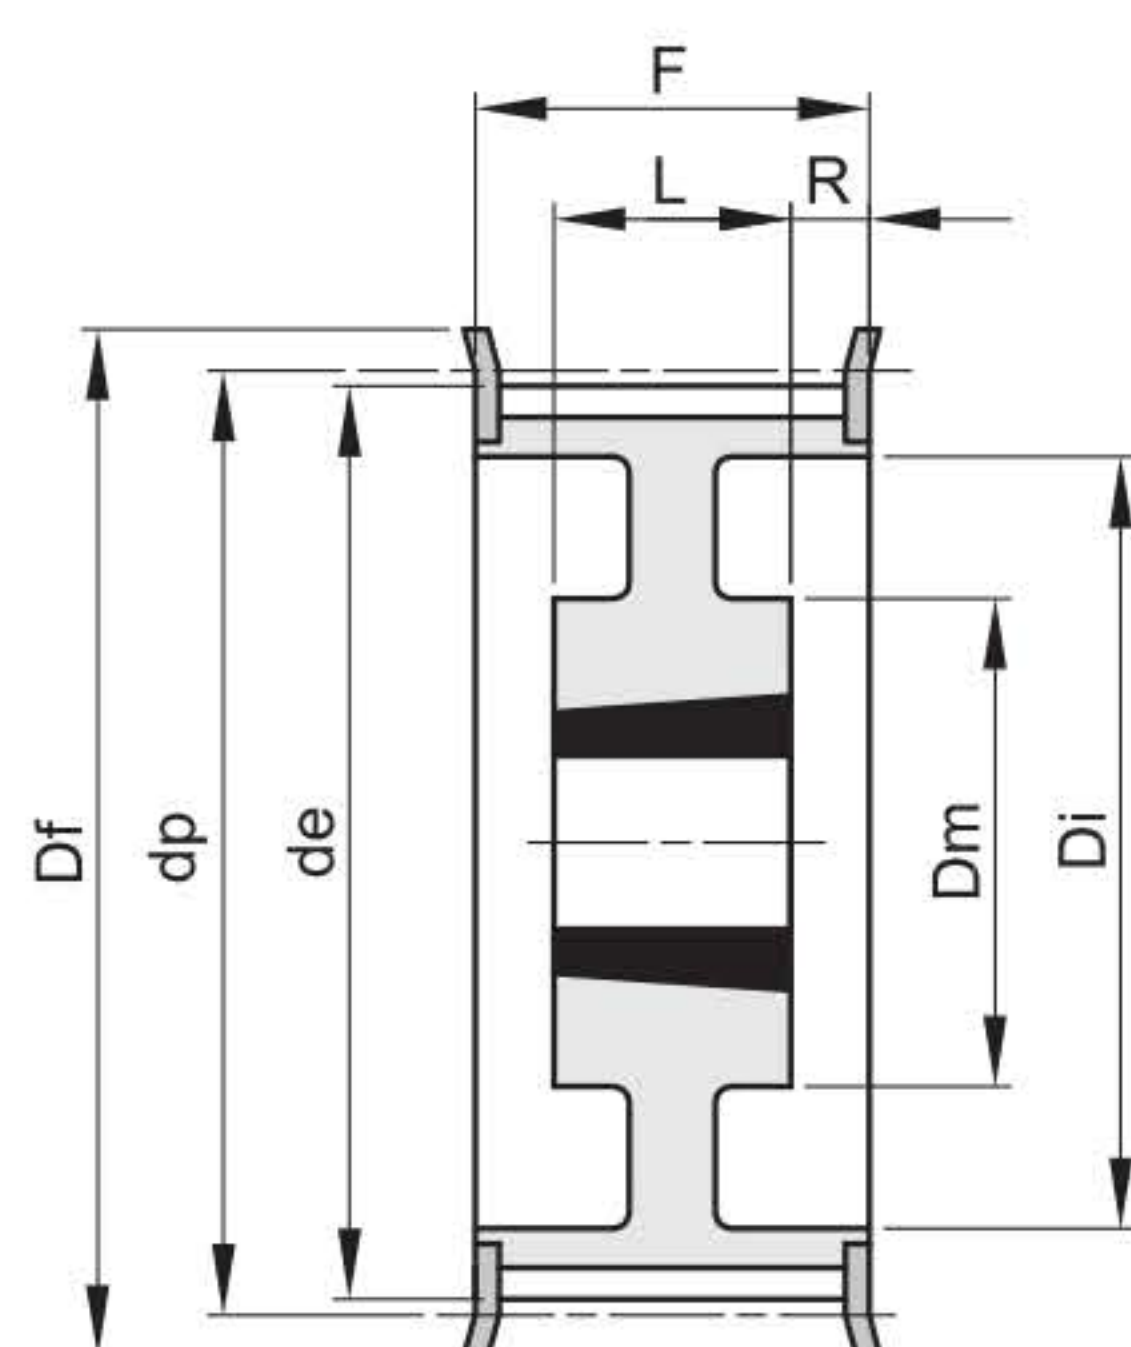

19F

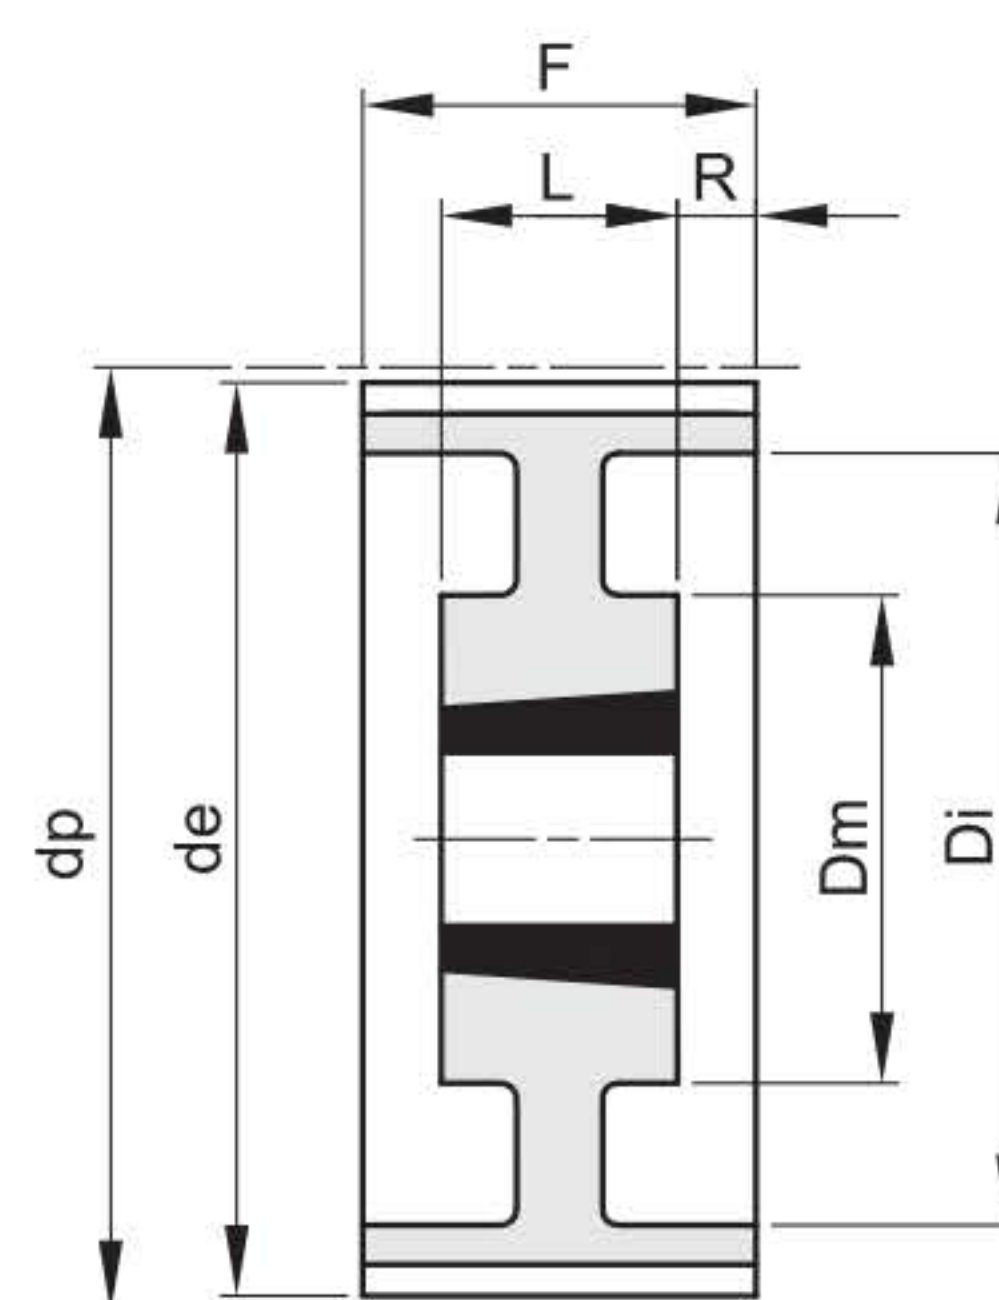

19

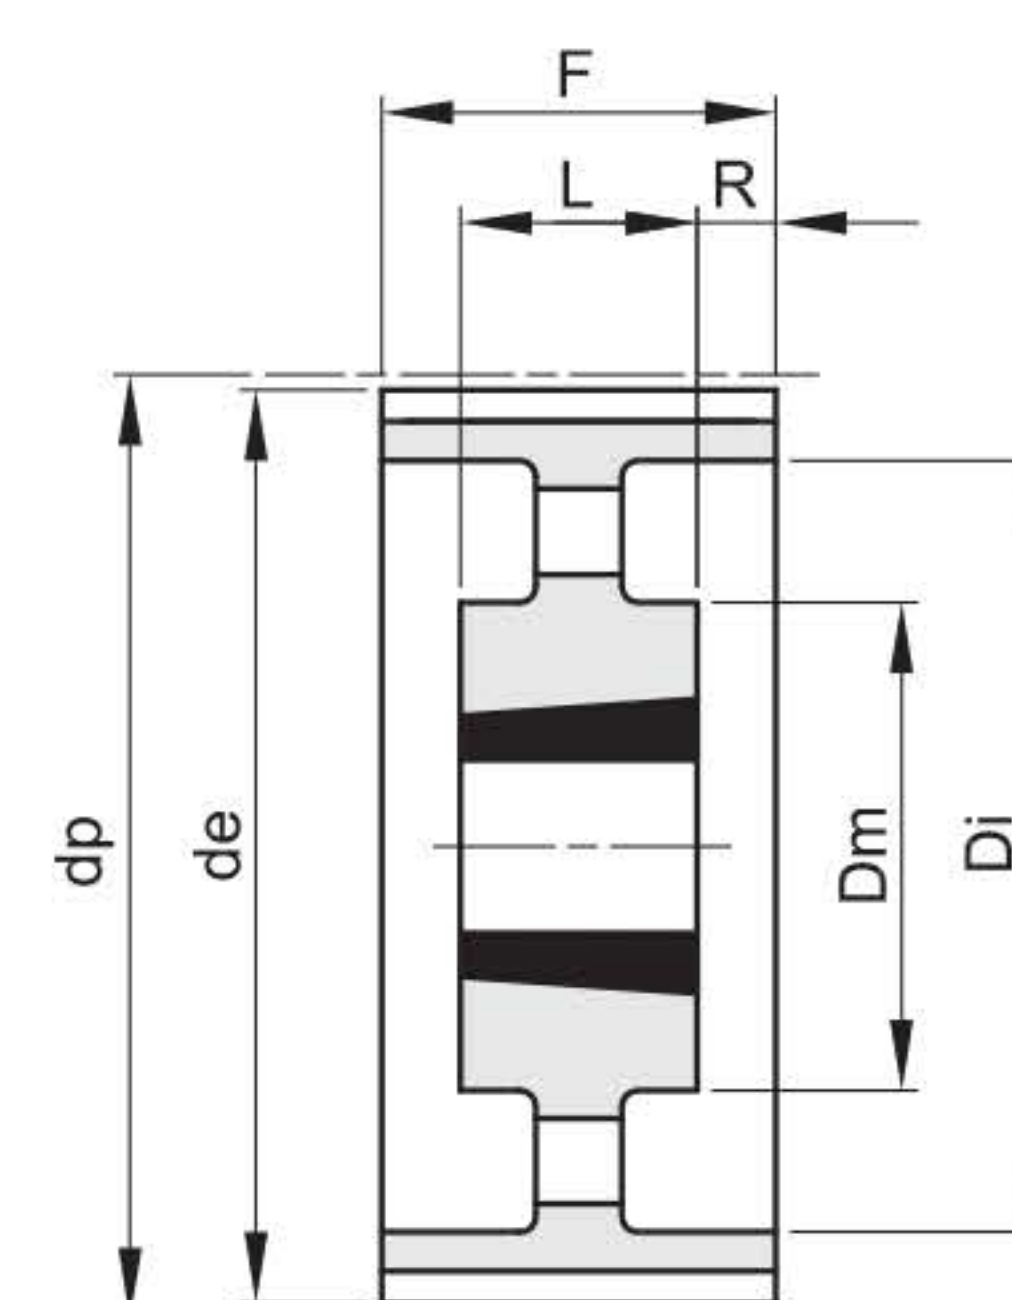


20

codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 28 14M 55	18F	St	28	2012	50	124,78	122,12	127		94	70	32	19	400	2,20
B 30 14M 55	18F	St	30	2517	60	133,69	130,99	138		100	70	45	12,5	401	2,70
B 32 14M 55	18F	St	32	2517	60	142,60	139,88	154		108	70	45	12,5	403	3,60
B 34 14M 55	18F	St	34	2517	60	151,52	148,79	160		110	70	45	12,5	404	4,50
B 36 14M 55	18F	St	36	2517	60	160,43	157,68	168		120	70	45	12,5	405	5,20
B 38 14M 55	18F	St	38	2517	60	169,34	166,60	183		130	70	45	12,5	406	6,20
B 40 14M 55	18F	St	40	2517	60	178,25	175,49	188		138	70	45	12,5	407	6,90
B 44 14M 55	18F	St	44	3020	75	196,08	193,28	211		155	70	51	9,5	411	8,60
B 48 14M 55	18F	St	48	3020	75	213,90	211,11	226		170	70	51	9,5	412	10,50
B 56 14M 55	18F	GG	56	3020	75	249,55	246,76	256		208	70	51	9,5	416	13,50
B 64 14M 55	19F	GG	64	3020	75	285,21	282,41	296	170	240	70	51	9,5	418	14,50
B 72 14M 55	19	GG	72	3020	75	320,86	318,06		170	280	70	51	9,5		16,30
B 80 14M 55	20	GG	80	3020	75	356,51	353,71		170	315	70	51	9,5		17,50
B 90 14M 55	20	GG	90	3020	75	401,07	398,28		170	360	70	51	9,5		20,00
B 112 14M 55	20	GG	112	3020	75	499,11	496,32		170	457	70	51	9,5		28,20
B 144 14M 55	20	GG	144	3020	75	641,71	638,92		170	600	70	51	9,5		36,00
B 168 14M 55	20	GG	168	3020	75	748,66	745,87		170	706	70	51	9,5		48,50
B 192 14M 55	20	GG	192	3020	75	855,62	852,82		170	813	70	51	9,5		52,00

14M

Passo 14 mm

Per cinghie larghezza 85 mm

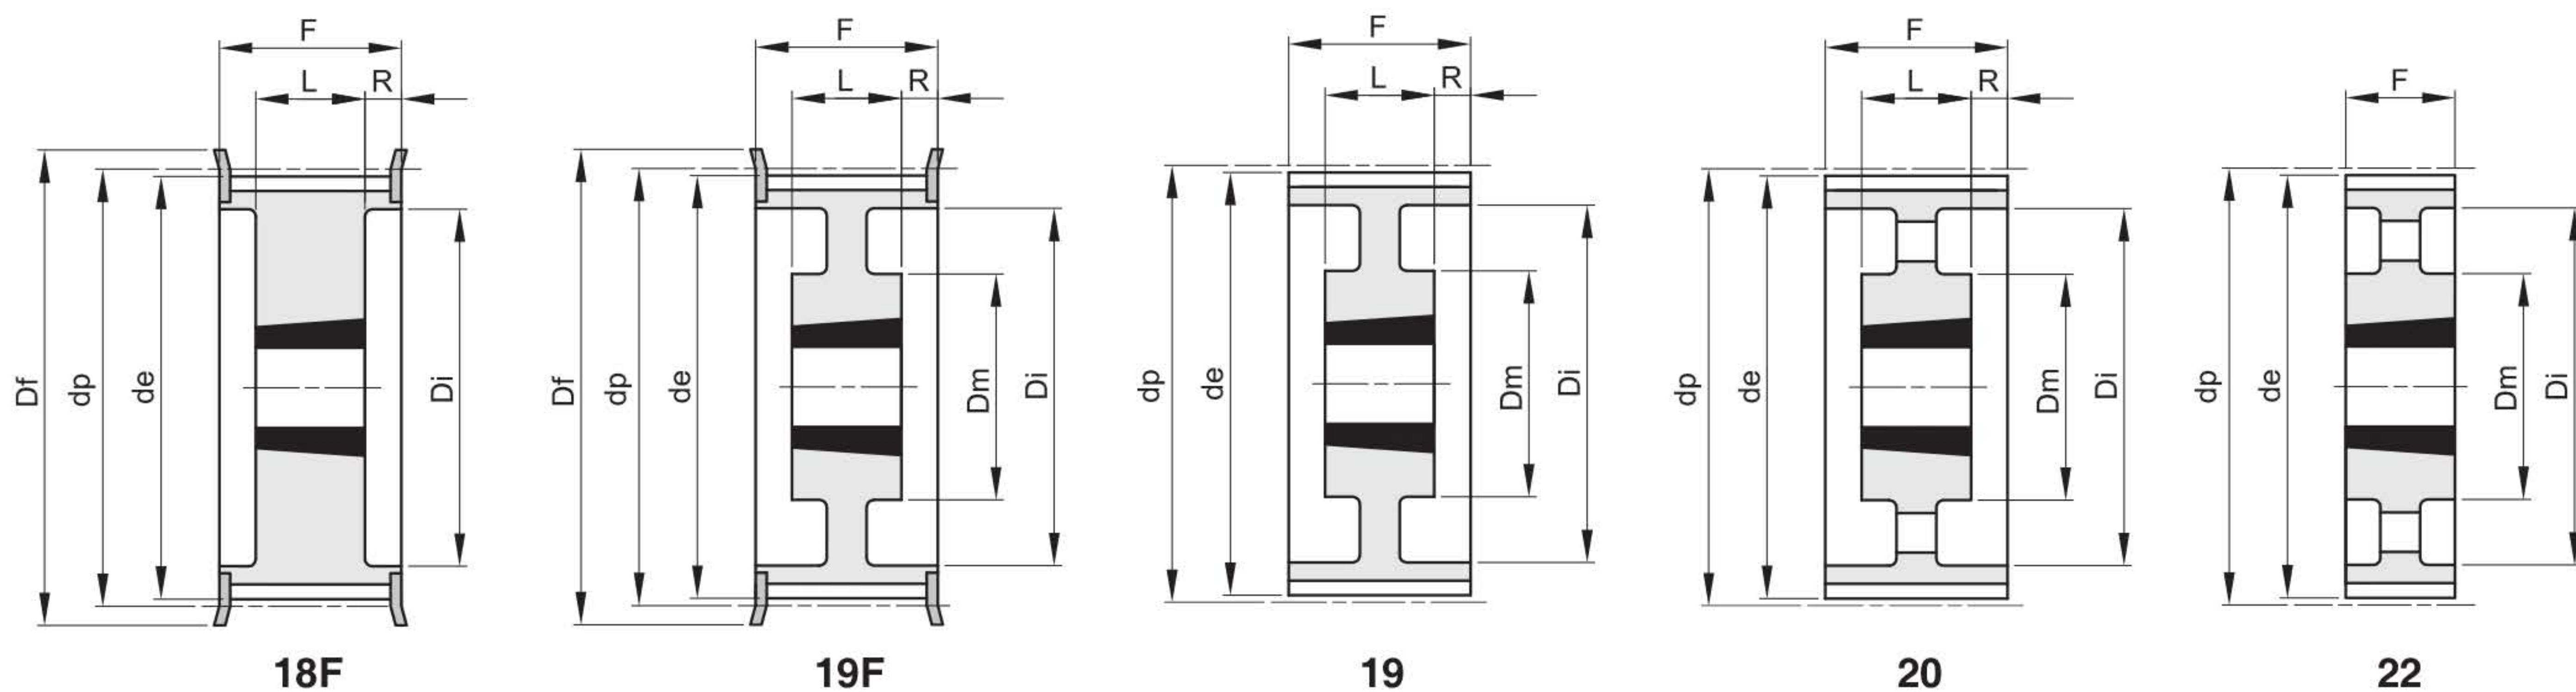


codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 28 14M 85	18F	St	28	2517	60	124,78	122,12	127		98	102	45	28,5	400	2,70
B 30 14M 85	18F	St	30	2517	60	133,69	130,99	138		100	102	45	28,5	401	3,80
B 32 14M 85	18F	St	32	2517	60	142,60	139,88	154		108	102	45	28,5	403	4,70
B 34 14M 85	18F	St	34	2517	60	151,52	148,79	160		110	102	45	28,5	404	6,00
B 36 14M 85	18F	St	36	3020	75	160,43	157,68	168		125	102	51	25,5	405	5,70
B 38 14M 85	18F	St	38	3020	75	169,34	166,60	183		130	102	51	25,5	406	6,80
B 40 14M 85	18F	St	40	3020	75	178,25	175,49	188		138	102	51	25,5	407	8,00
B 44 14M 85	18F	St	44	3030	75	196,08	193,28	211		155	102	76	13	411	11,70
B 48 14M 85	18F	St	48	3030	75	213,90	211,11	226		170	102	76	13	412	15,00
B 56 14M 85	18F	GG	56	3525	90	249,55	246,76	256		210	102	65	18,5	416	19,00
B 64 14M 85	19F	GG	64	3525	90	285,21	282,41	296	190	240	102	65	18,5	418	23,50
B 72 14M 85	19	GG	72	3525	90	320,86	318,06		190	280	102	65	18,5		25,00
B 80 14M 85	20	GG	80	3525	90	356,51	353,71		190	315	102	65	18,5		26,00
B 90 14M 85	20	GG	90	3525	90	401,07	398,28		190	360	102	65	18,5		28,00
B112 14M 85	20	GG	112	3525	90	499,11	496,32		190	457	102	65	18,5		36,00
B144 14M 85	20	GG	144	3525	90	641,71	638,92		190	600	102	65	18,5		48,00
B168 14M 85	20	GG	168	3525	90	748,66	745,87		190	706	102	65	18,5		60,00
B192 14M 85	22	GG	192	4040	100	855,62	852,82		230	813	102	102			85,00


14M

Passo 14 mm


Per cinghie larghezza 115 mm

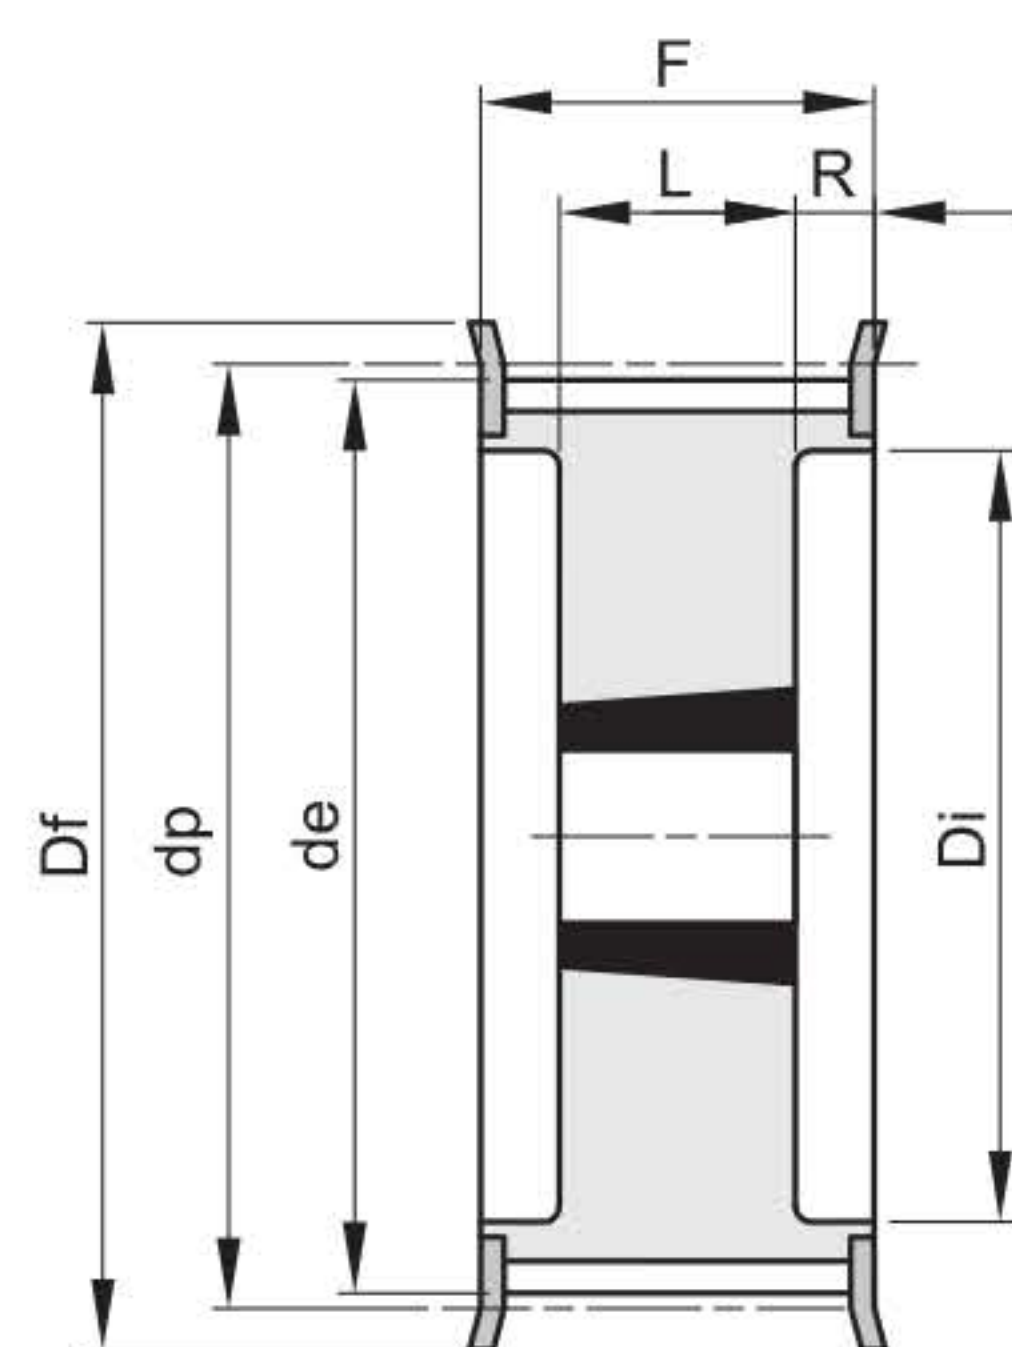


18F

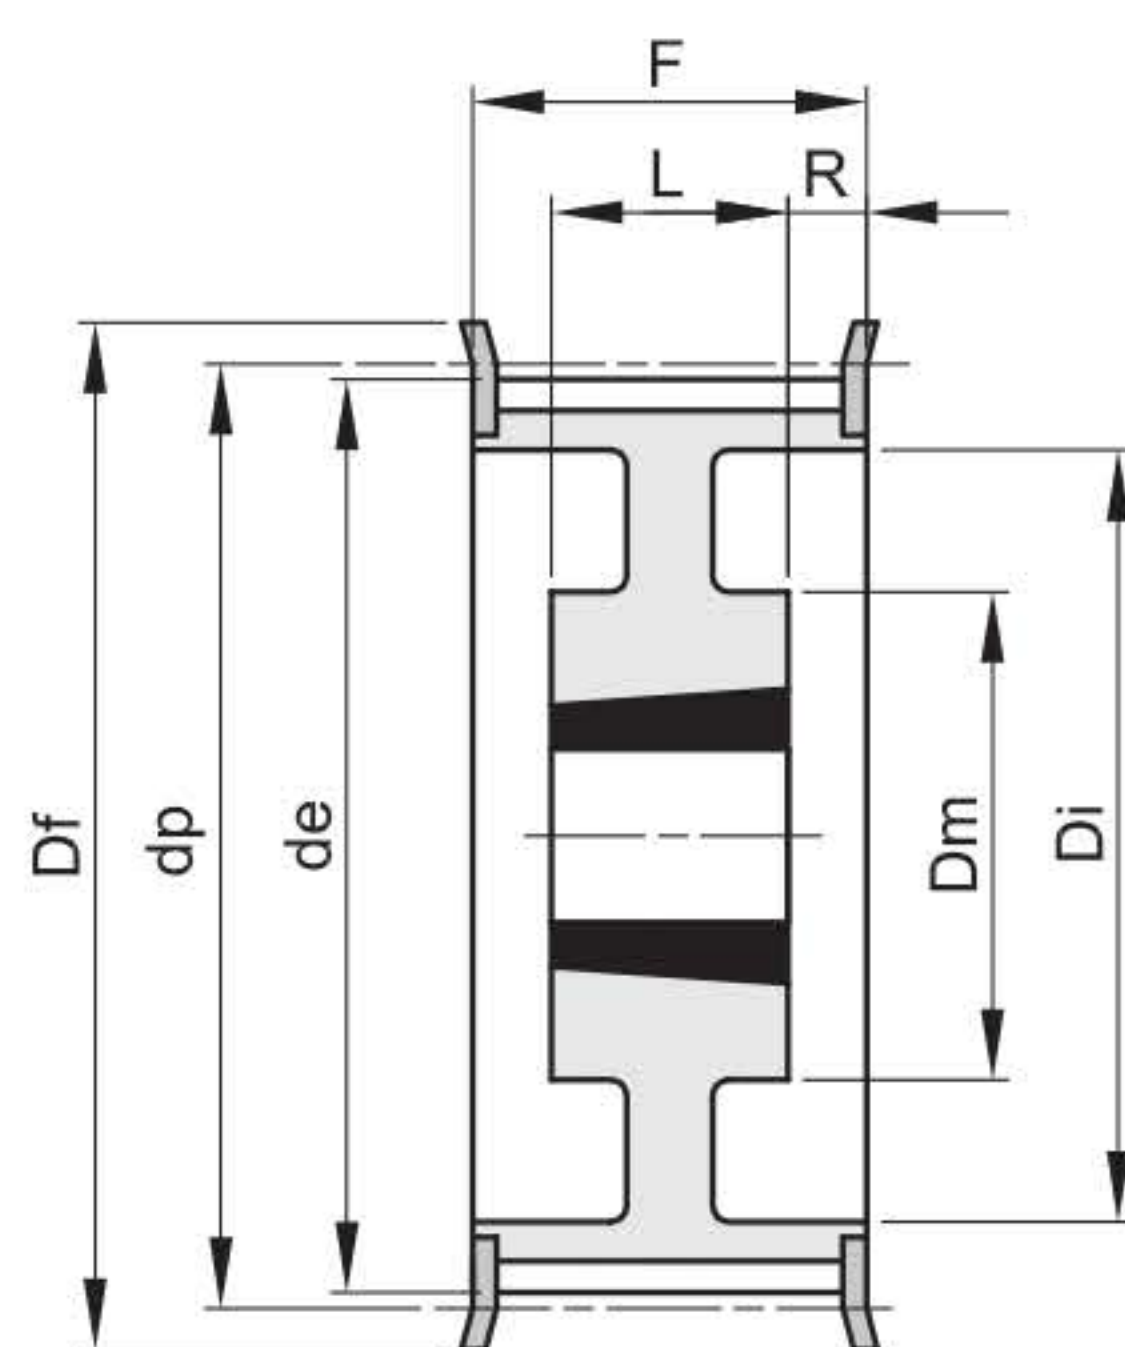

19F

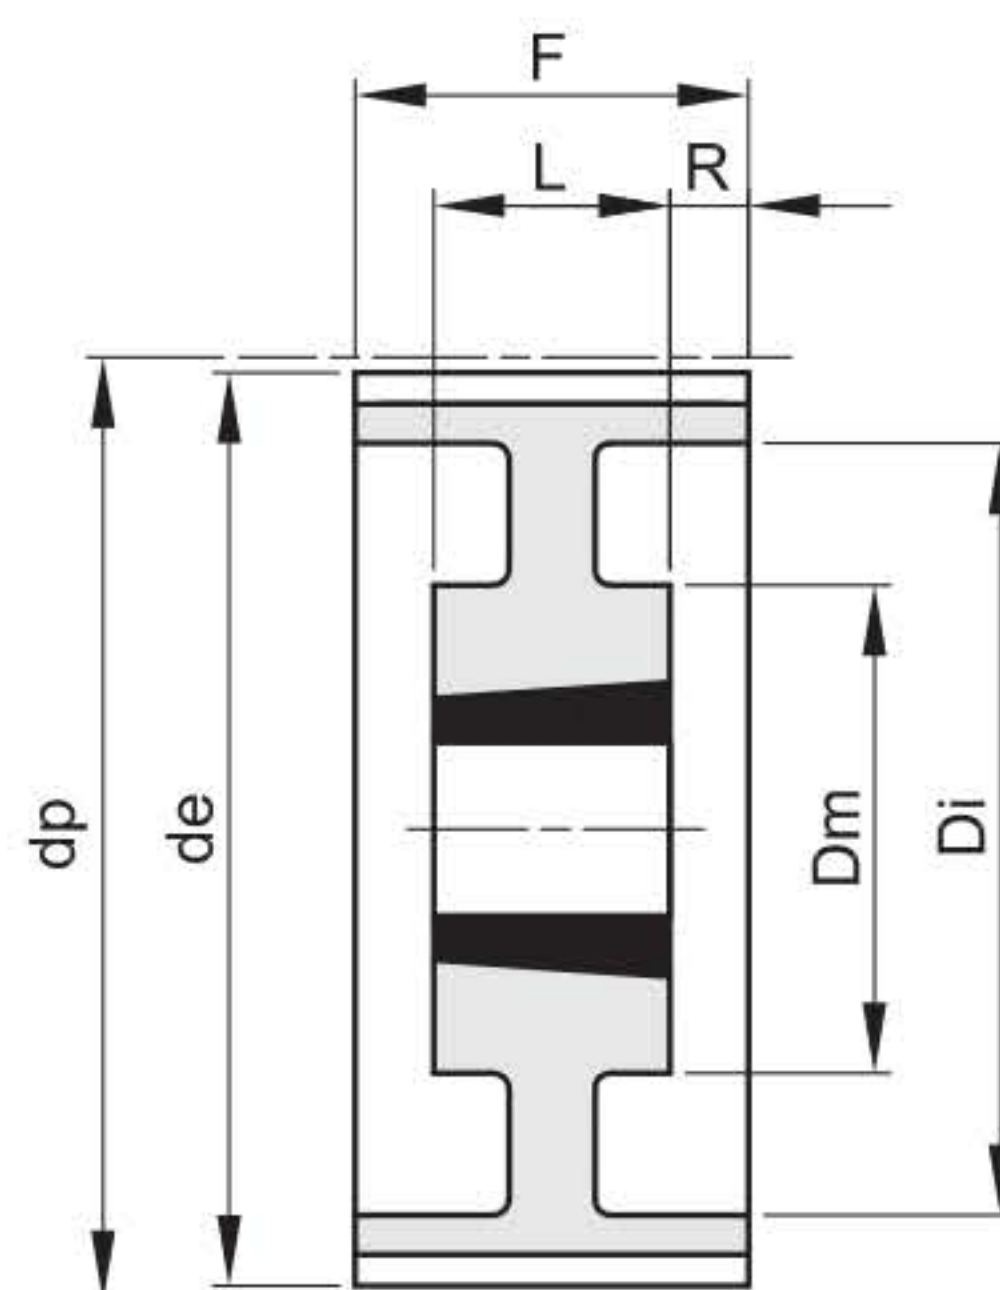

19

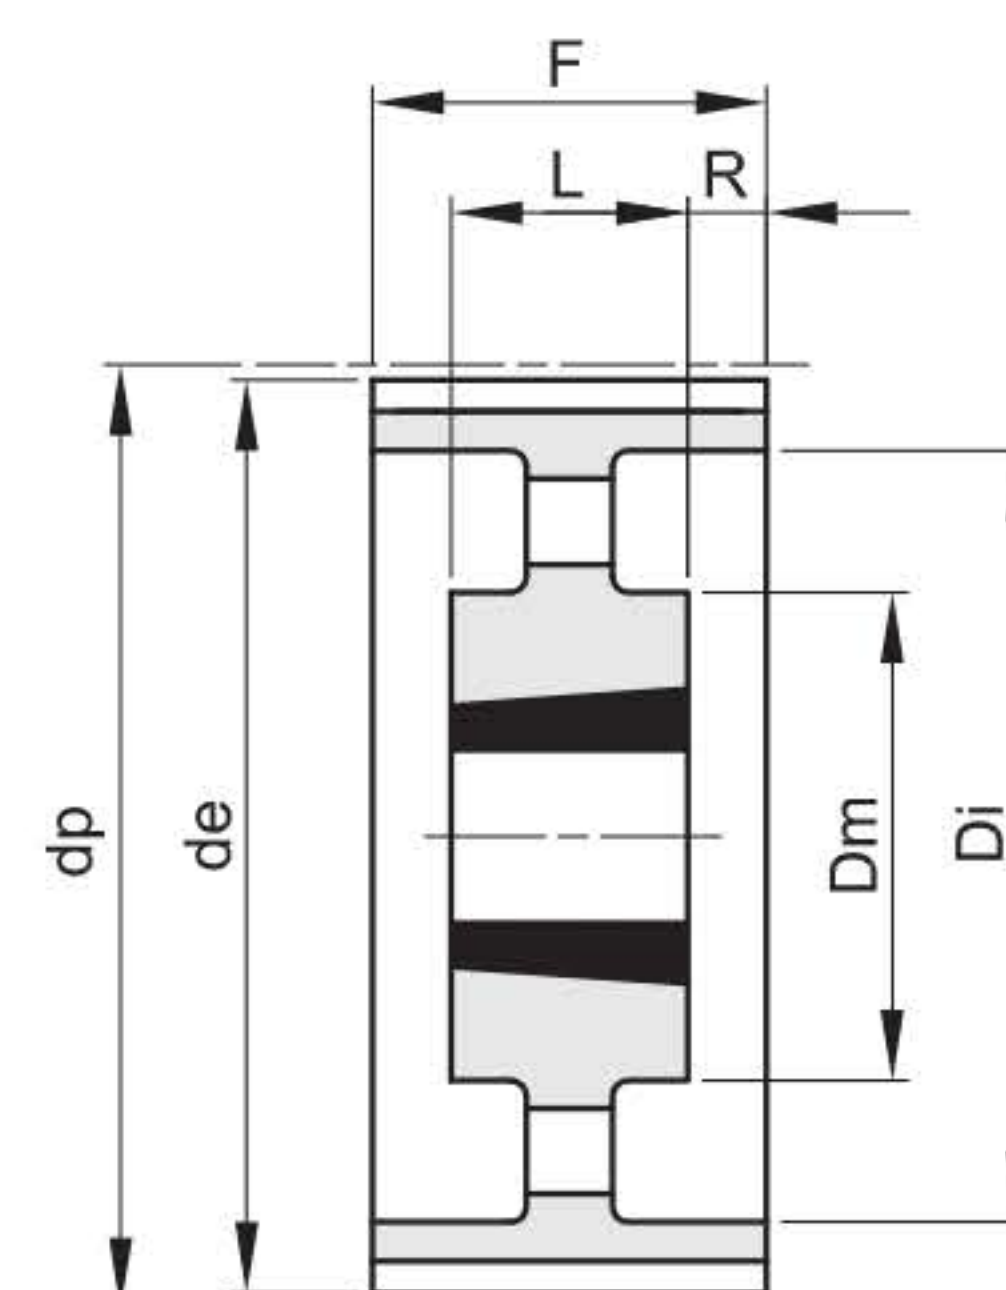


20

codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 28 14M 115	18F	St	28	2517	60	124,78	122,12	127		98	133	45	44	400	3,80
B 30 14M 115	18F	St	30	2517	60	133,69	130,99	138		100	133	45	44	401	5,00
B 32 14M 115	18F	St	32	2517	60	142,60	139,88	154		108	133	45	44	403	6,80
B 34 14M 115	18F	St	34	2517	60	151,52	148,79	160		110	133	45	44	404	6,90
B 36 14M 115	18F	St	36	3020	75	160,43	157,68	168		125	133	51	41	405	7,00
B 38 14M 115	18F	St	38	3020	75	169,34	166,60	183		130	133	51	41	406	8,50
B 40 14M 115	18F	St	40	3020	75	178,25	175,49	188		138	133	51	41	407	9,10
B 44 14M 115	18F	St	44	3030	75	196,08	193,28	211		155	133	76	28,5	411	13,00
B 48 14M 115	18F	St	48	3030	75	213,90	211,11	226		170	133	76	28,5	412	16,00
B 56 14M 115	18F	GG	56	3535	90	249,55	246,76	256		210	133	89	22	416	24,00
B 64 14M 115	19F	GG	64	3535	90	285,21	282,41	296	190	240	133	89	22	418	32,00
B 72 14M 115	19	GG	72	3535	90	320,86	318,06		190	280	133	89	22		31,00
B 80 14M 115	20	GG	80	3535	90	356,51	353,71		190	315	133	89	22		32,00
B 90 14M 115	20	GG	90	3535	90	401,07	398,28		190	360	133	89	22		37,00
B112 14M 115	20	GG	112	3535	90	499,11	496,32		190	457	133	89	22		45,00
B144 14M 115	20	GG	144	4040	100	641,71	638,92		230	600	133	102	15,5		63,00
B168 14M 115	20	GG	168	4040	100	748,66	745,87		230	706	133	102	15,5		77,50
B192 14M 115	20	GG	192	4040	100	855,62	852,82		230	813	133	102	15,5		95,00


14M

Passo 14 mm


Per cinghie larghezza 170 mm

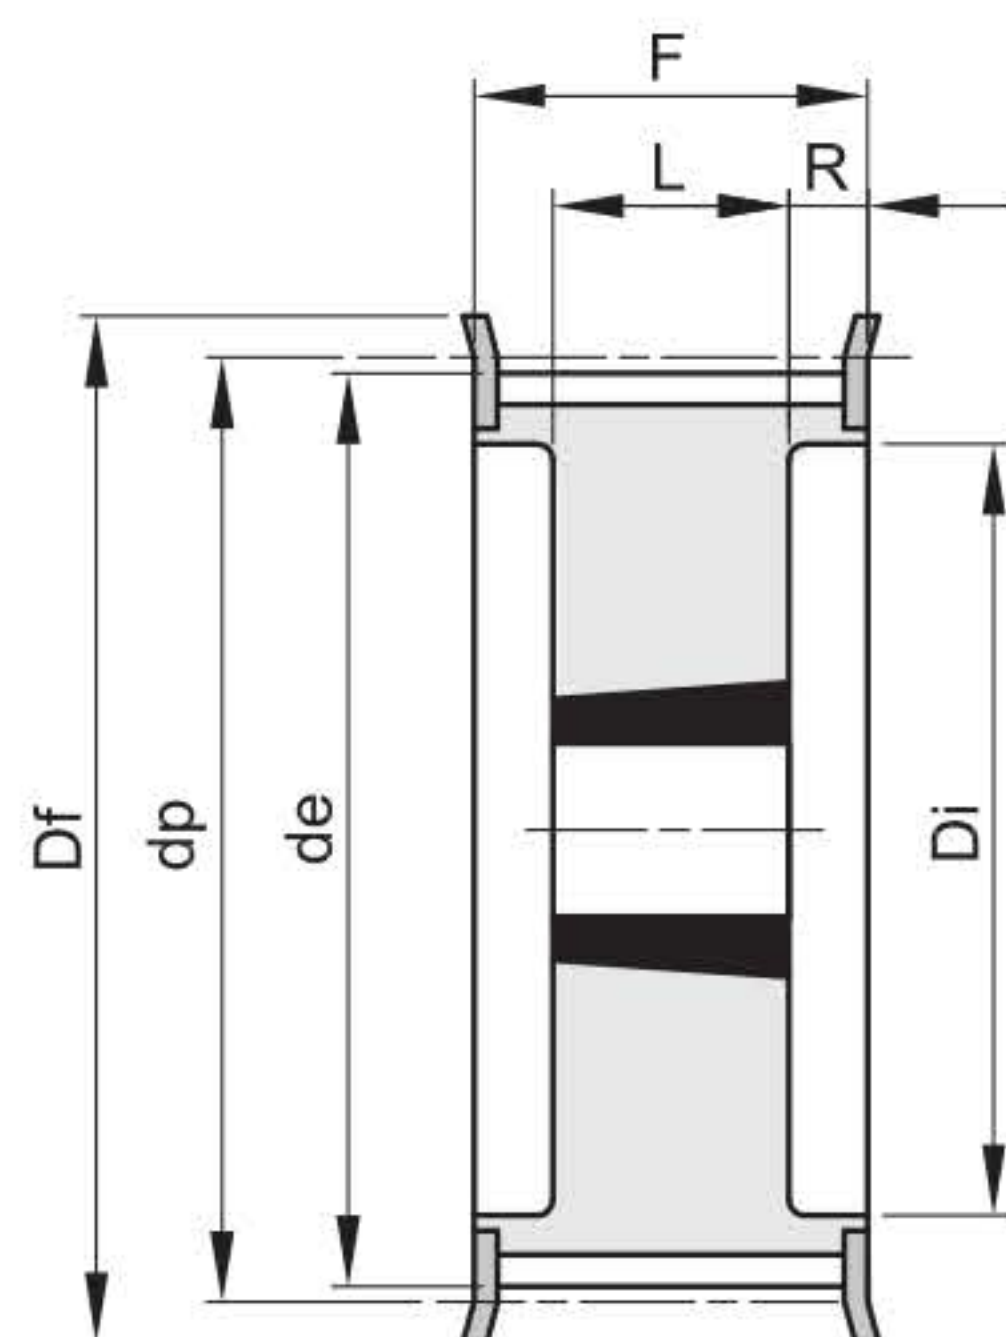

18F

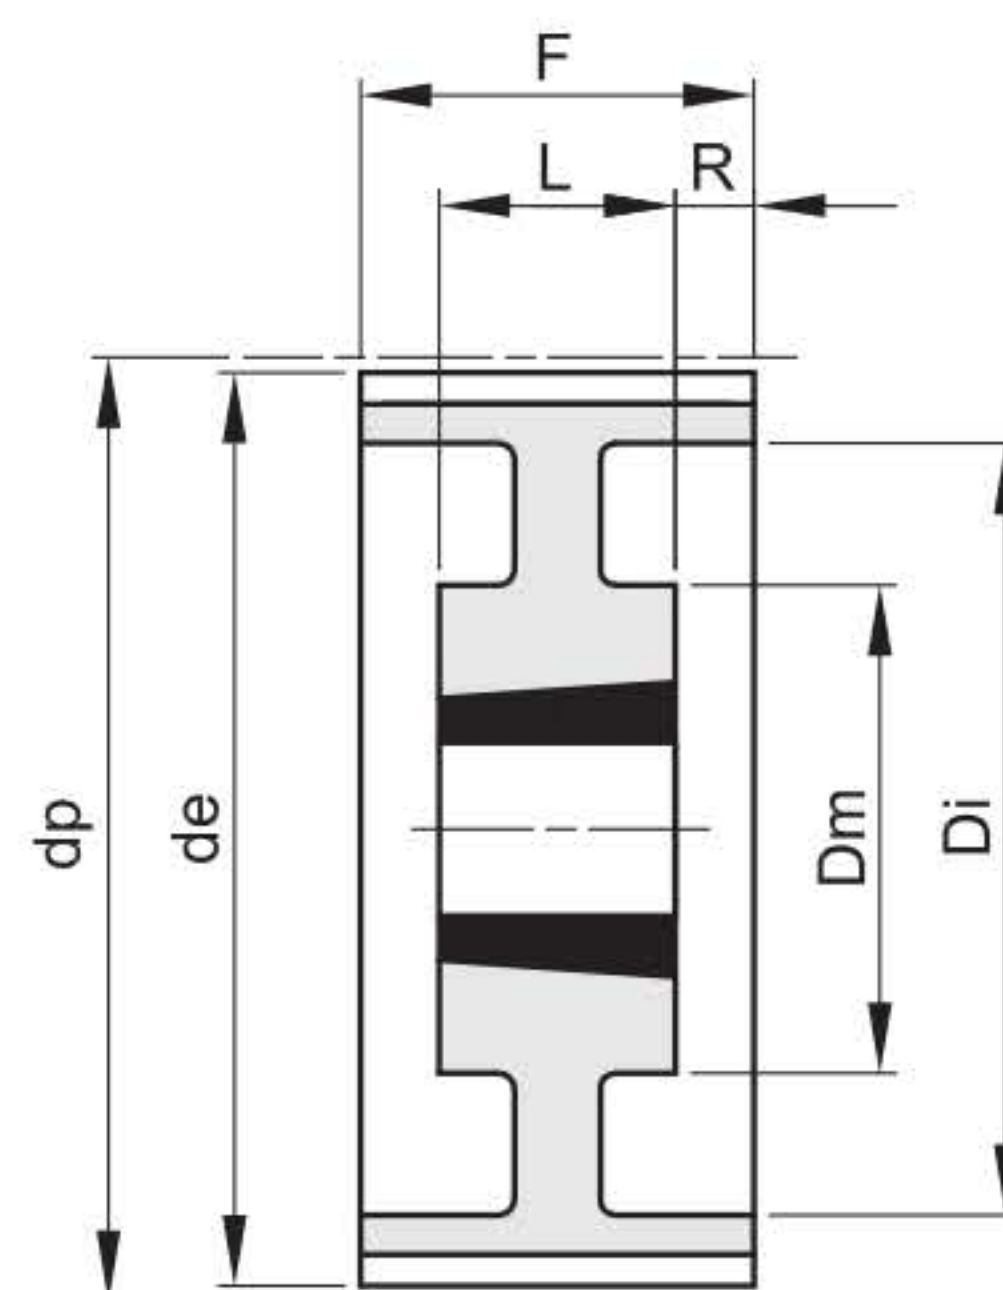

19

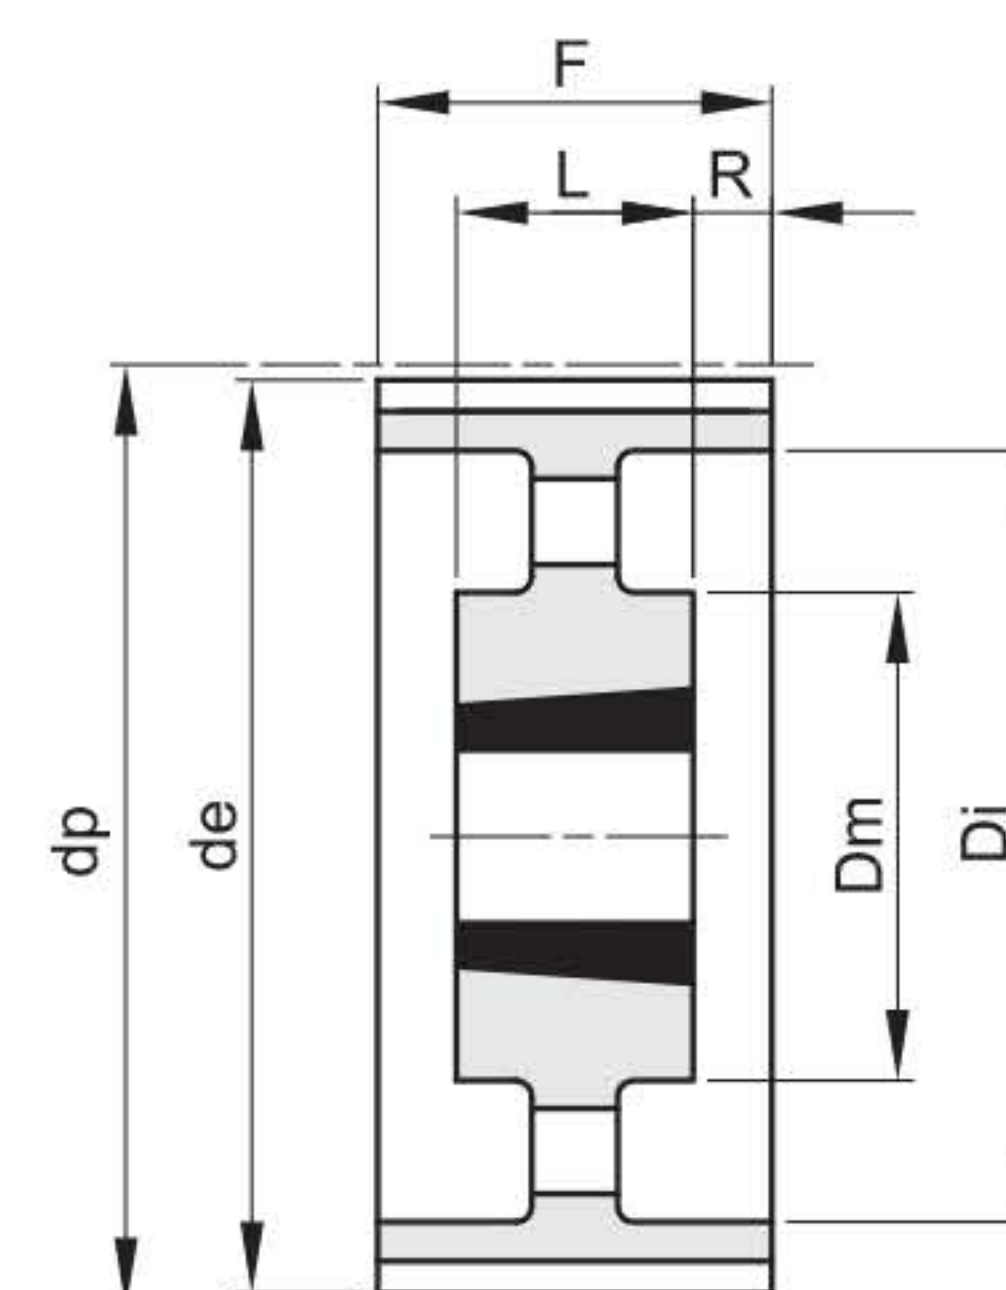


20

codice	tipo	mat.	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
B 38 14M 170	18F	St	38	3030	75	169,34	166,60	183		130	187	76	55,5	406	11,70
B 40 14M 170	18F	St	40	3030	75	178,25	175,49	188		138	187	76	55,5	407	13,00
B 44 14M 170	18F	St	44	3535	90	196,08	193,28	211		155	187	89	49	411	15,00
B 48 14M 170	18F	St	48	3535	90	213,90	211,11	226		170	187	89	49	412	19,00
B 56 14M 170	18F	St	56	3535	90	249,55	246,76	256		210	187	89	49	416	28,50
B 64 14M 170	18F	GG	64	4040	100	285,21	282,41	296		240	187	102	42,5	418	41,00
B 72 14M 170	19	GG	72	4040	100	320,86	318,06		230	280	187	102	42,5		47,00
B 80 14M 170	19	GG	80	4040	100	356,51	353,71		230	315	187	102	42,5		48,00
B 90 14M 170	20	GG	90	4040	100	401,07	398,28		230	360	187	102	42,5		52,50
B112 14M 170	20	GG	112	5050	125	499,11	496,32		265	457	187	127	30		74,50
B144 14M 170	20	GG	144	5050	125	641,71	638,92		265	600	187	127	30		91,00
B168 14M 170	20	GG	168	5050	125	748,66	745,87		265	706	187	127	30		116,00
B192 14M 170	20	GG	192	5050	125	855,62	852,82		265	813	187	127	30		134,00

T 2,5

Passo 2,5 mm

Per cinghie larghezza 6 mm

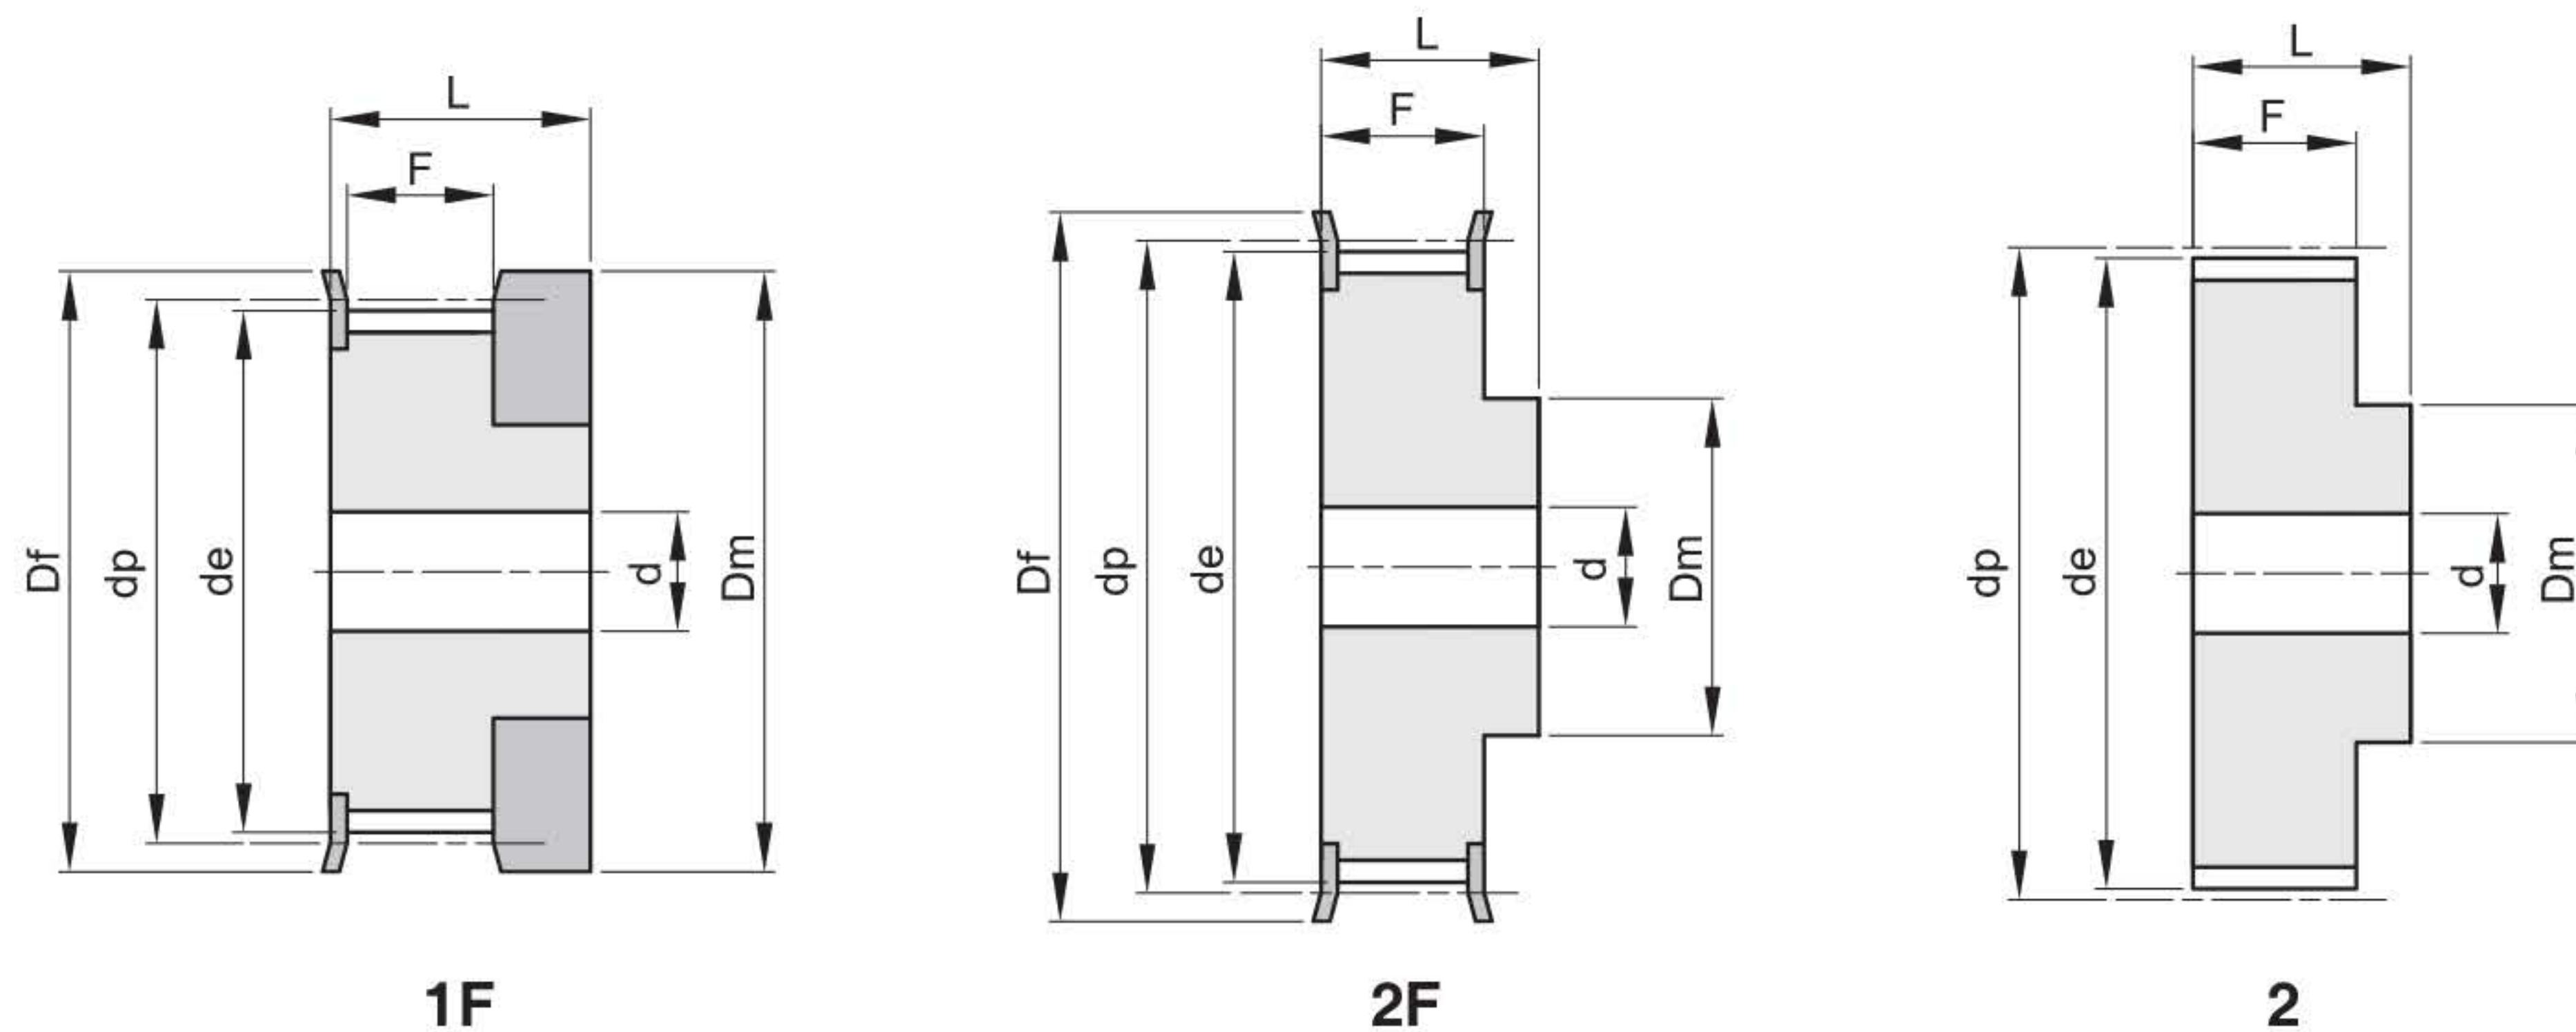


codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
12 T 2,5 6	1F	Al	12	9,00	13	12	9	16		100	0,01
14 T 2,5 6	1F	Al	14	10,60	15	14	9	16		101	0,01
15 T 2,5 6	1F	Al	15	11,40	15	15	9	16		101	0,01
16 T 2,5 6	1F	Al	16	12,20	16	16	9	16		102	0,01
18 T 2,5 6	2F	Al	18	13,80	18	10	10	16	3	104	0,01
19 T 2,5 6	2F	Al	19	14,60	18	10	10	16	3	104	0,01
20 T 2,5 6	2F	Al	20	15,40	19,5	11	10	16	3	105	0,01
22 T 2,5 6	2F	Al	22	17,00	23	11	10	16	3	106	0,01
24 T 2,5 6	2F	Al	24	18,55	23	12	10	16	3	107	0,01
25 T 2,5 6	2F	Al	25	19,35	23	13	10	16	3	107	0,01
26 T 2,5 6	2F	Al	26	20,15	25	14	10	16	4	108	0,01
28 T 2,5 6	2F	Al	28	21,75	25	14	10	16	4	108	0,02
30 T 2,5 6	2F	Al	30	23,35	28	16	10	16	6	109	0,02
32 T 2,5 6	2F	Al	32	24,95	32	16	10	16	6	110	0,02
36 T 2,5 6	2F	Al	36	28,10	36	20	10	16	6	111	0,03
40 T 2,5 6	2F	Al	40	31,30	38	22	10	16	6	112	0,03
44 T 2,5 6	2	Al	44	34,50		24	10	16	6		0,04
48 T 2,5 6	2	Al	48	37,70		26	10	16	6		0,05
60 T 2,5 6	2	Al	60	47,25		34	10	16	8		0,07

T 5

Passo 5 mm

Per cinghie larghezza 10 mm

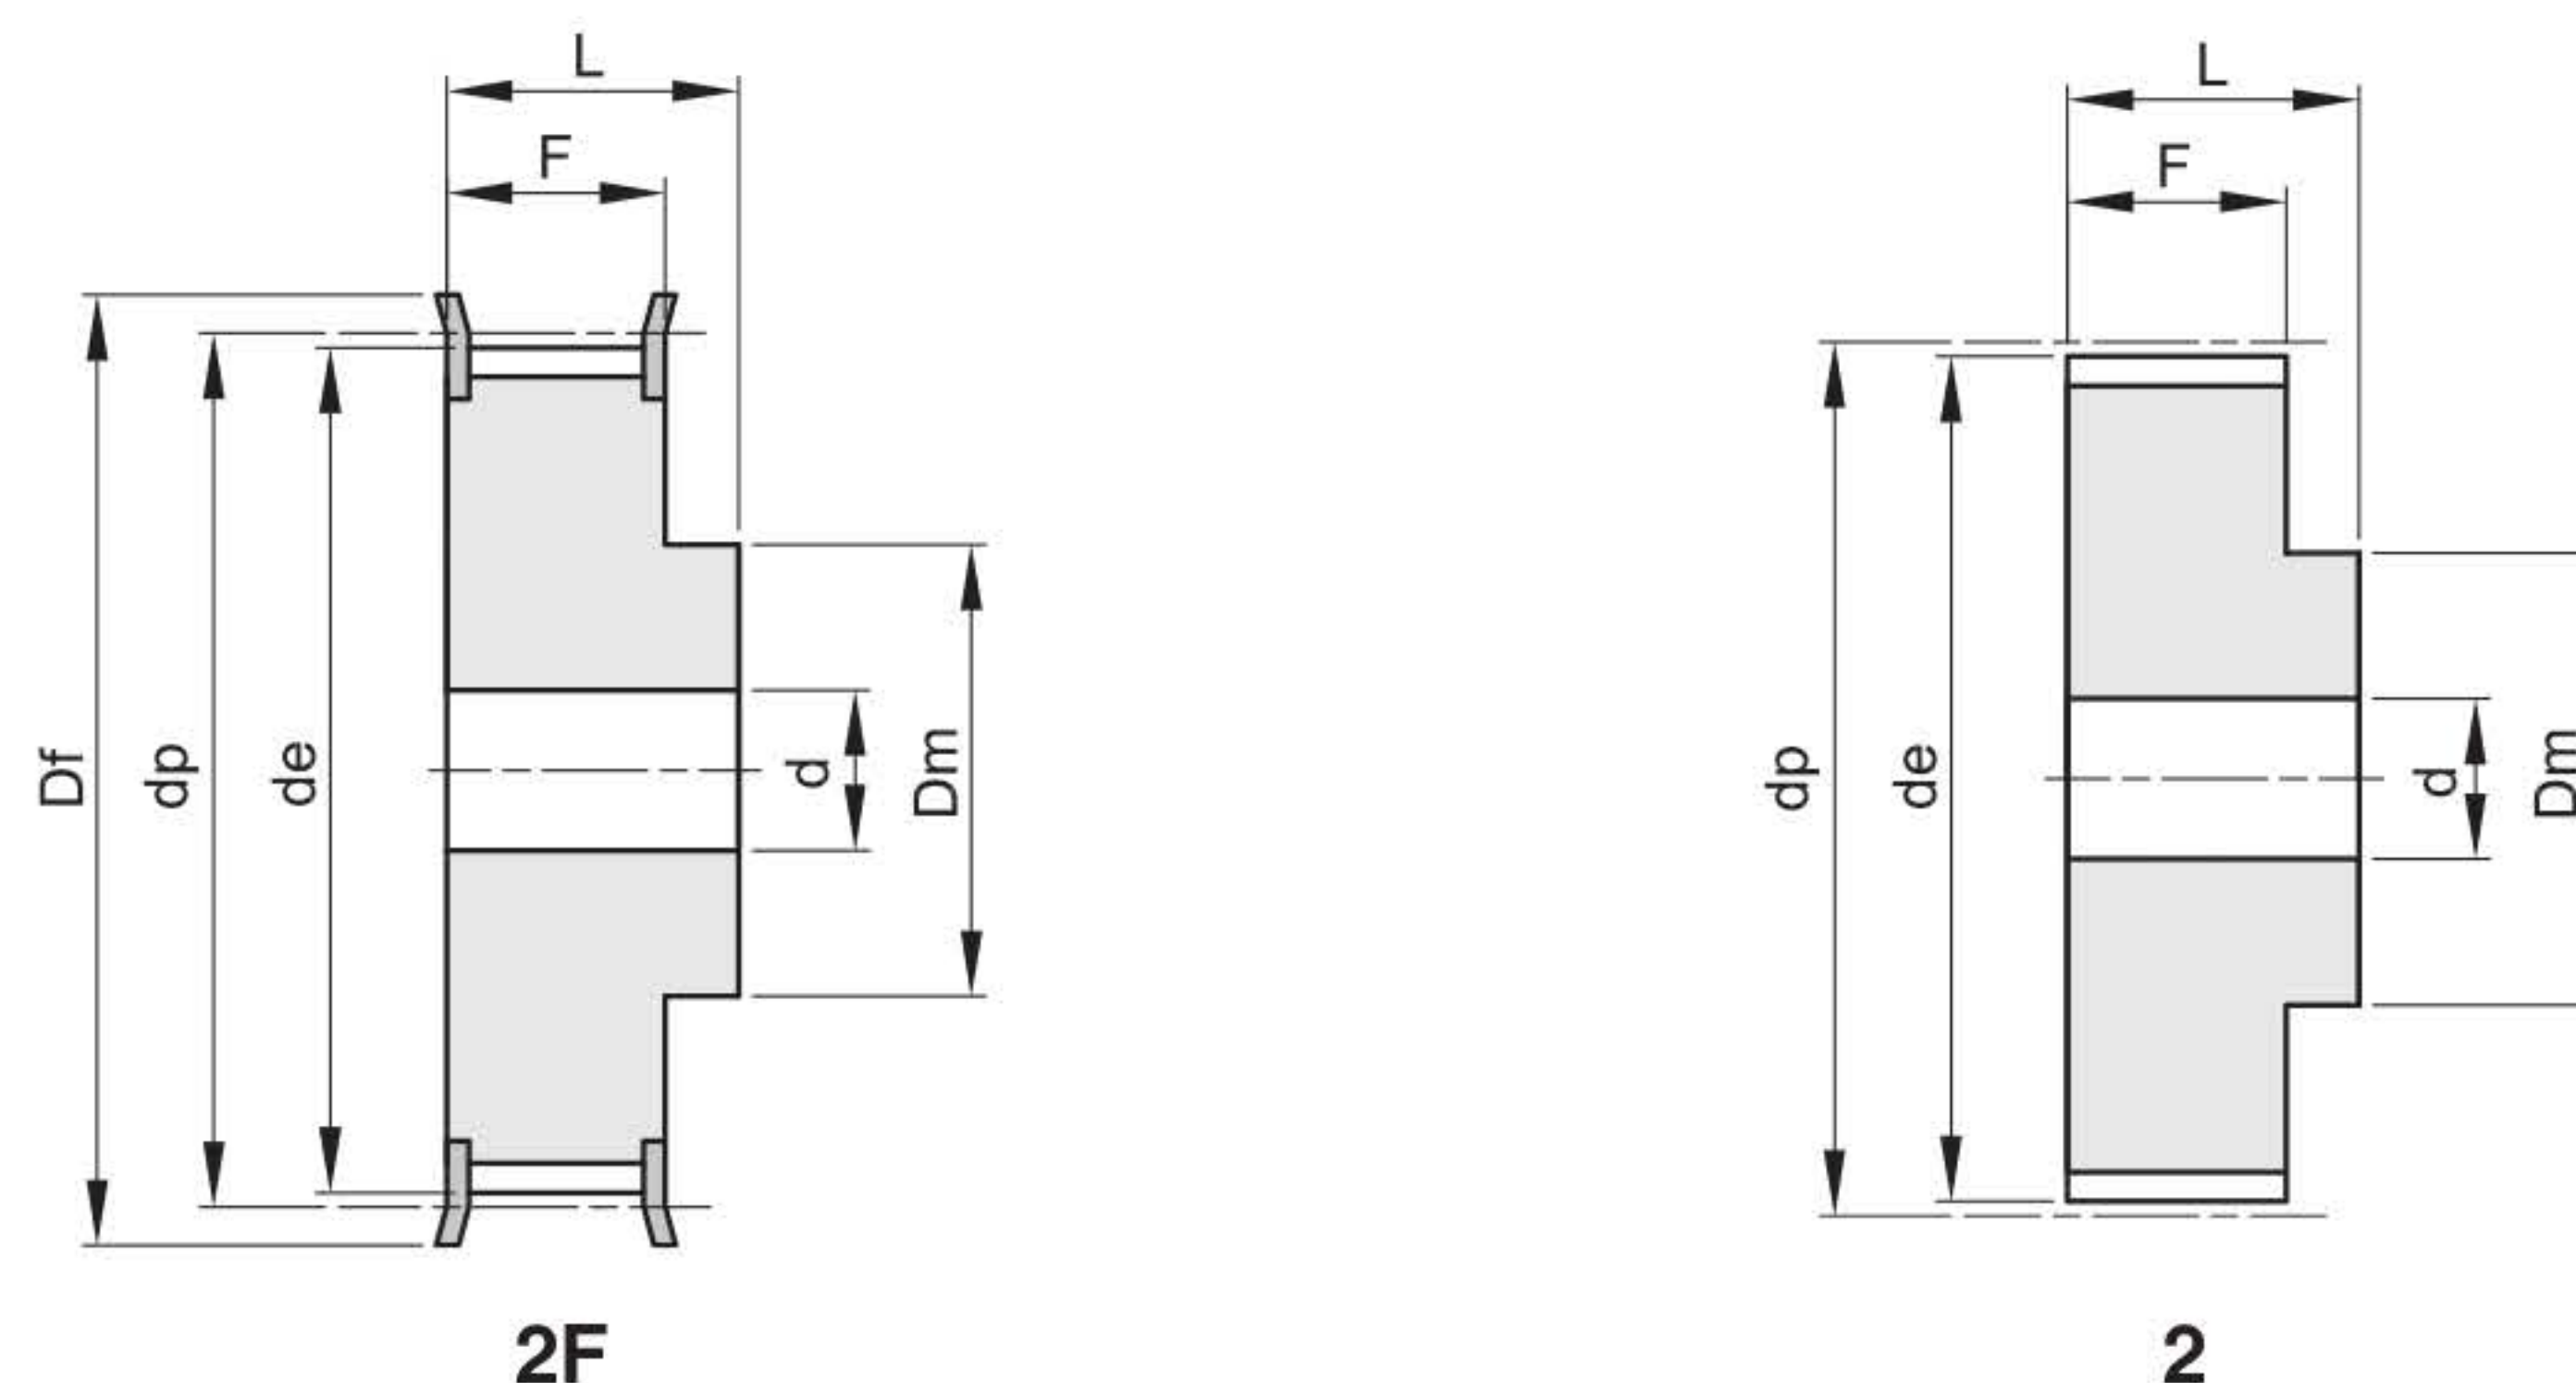


codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
10 T 5 10	2F	Al	10	15,05	19,5	8	15	21		200	0,01
12 T 5 10	2F	Al	12	18,25	23	10	15	21		201	0,01
14 T 5 10	2F	Al	14	21,45	25	13	15	21		203	0,02
15 T 5 10	2F	Al	15	23,05	28	16	15	21		204	0,02
16 T 5 10	2F	Al	16	24,60	32	18	15	21		205	0,03
18 T 5 10	2F	Al	18	27,80	32	20	15	21		205	0,03
19 T 5 10	2F	Al	19	29,40	36	22	15	21		206	0,04
20 T 5 10	2F	Al	20	31,00	36	23	15	21		206	0,04
22 T 5 10	2F	Al	22	34,25	38	24	15	21		207	0,05
24 T 5 10	2F	Al	24	37,40	42	26	15	21		208	0,06
25 T 5 10	2F	Al	25	38,95	44	26	15	21		209	0,06
26 T 5 10	2F	Al	26	40,60	44	26	15	21		209	0,06
27 T 5 10	2F	Al	27	42,20	48	30	15	21	8	210	0,07
28 T 5 10	2F	Al	28	43,75	48	32	15	21	8	210	0,07
30 T 5 10	2F	Al	30	46,95	51	34	15	21	8	211	0,07
32 T 5 10	2F	Al	32	50,10	54	38	15	21	8	212	0,09
36 T 5 10	2F	Al	36	56,45	63	38	15	21	8	215	0,11
40 T 5 10	2F	Al	40	62,85	66	40	15	21	8	216	0,14
42 T 5 10	2F	Al	42	66,00	71	40	15	21	8	217	0,18
44 T 5 10	2	Al	44	69,20		45	15	21	8		0,18
48 T 5 10	2	Al	48	75,55		50	15	21	8		0,20
60 T 5 10	2	Al	60	94,65		65	15	21	8		0,31

T 5

Passo 5 mm

Per cinghie larghezza 16 mm


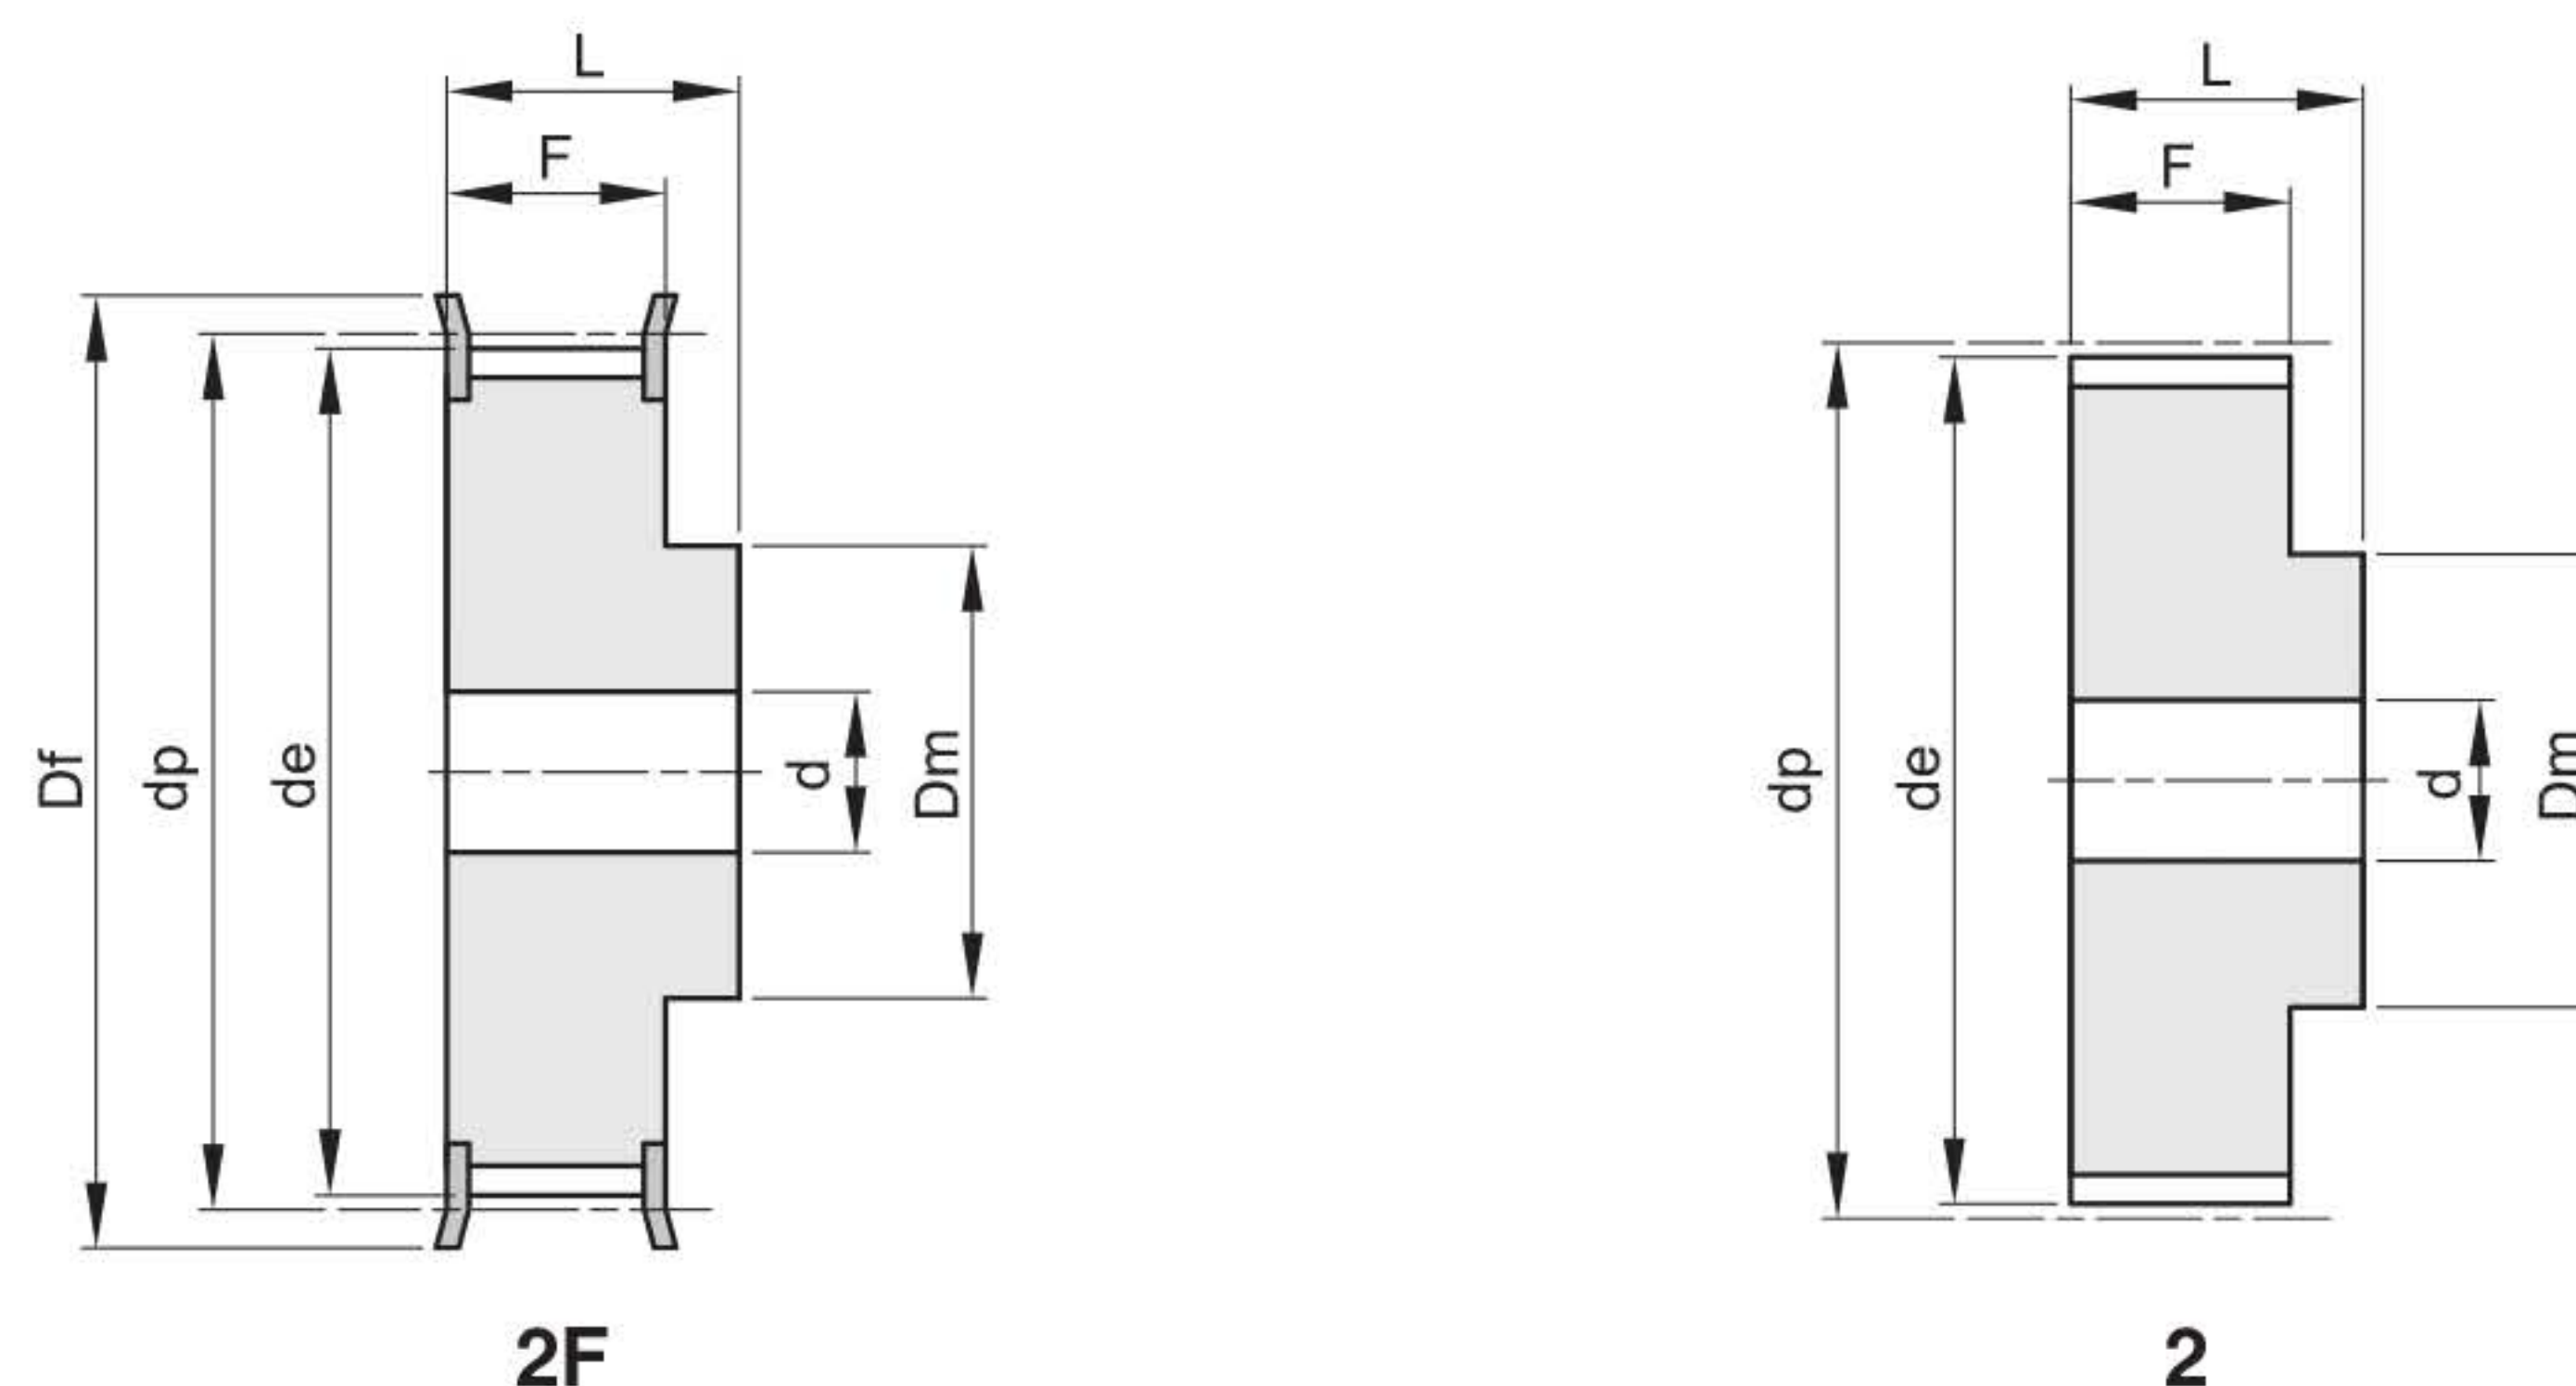


codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
10 T 5 16	2F	Al	10	15,05	19,5	8	21	27		200	0,02
12 T 5 16	2F	Al	12	18,25	23	10	21	27		201	0,02
14 T 5 16	2F	Al	14	21,45	25	13	21	27		203	0,03
15 T 5 16	2F	Al	15	23,05	28	16	21	27		204	0,03
16 T 5 16	2F	Al	16	24,60	32	18	21	27		205	0,04
18 T 5 16	2F	Al	18	27,80	32	20	21	27		205	0,04
19 T 5 16	2F	Al	19	29,40	36	22	21	27		206	0,05
20 T 5 16	2F	Al	20	31,00	36	23	21	27		206	0,06
22 T 5 16	2F	Al	22	34,25	38	24	21	27		207	0,06
24 T 5 16	2F	Al	24	37,40	42	26	21	27		208	0,08
25 T 5 16	2F	Al	25	38,95	44	26	21	27		209	0,08
26 T 5 16	2F	Al	26	40,60	44	26	21	27		209	0,09
27 T 5 16	2F	Al	27	42,20	48	30	21	27	8	210	0,09
28 T 5 16	2F	Al	28	43,75	48	32	21	27	8	210	0,09
30 T 5 16	2F	Al	30	46,95	51	34	21	27	8	211	0,10
32 T 5 16	2F	Al	32	50,10	54	38	21	27	8	212	0,12
36 T 5 16	2F	Al	36	56,45	63	38	21	27	8	215	0,16
40 T 5 16	2F	Al	40	62,85	66	40	21	27	8	216	0,19
42 T 5 16	2F	Al	42	66,00	71	40	21	27	8	217	0,20
44 T 5 16	2	Al	44	69,20		45	21	27	8		0,23
48 T 5 16	2	Al	48	75,55		50	21	27	8		0,28
60 T 5 16	2	Al	60	94,65		65	21	27	8		0,43

T 5

Passo 5 mm

Per cinghie larghezza 25 mm

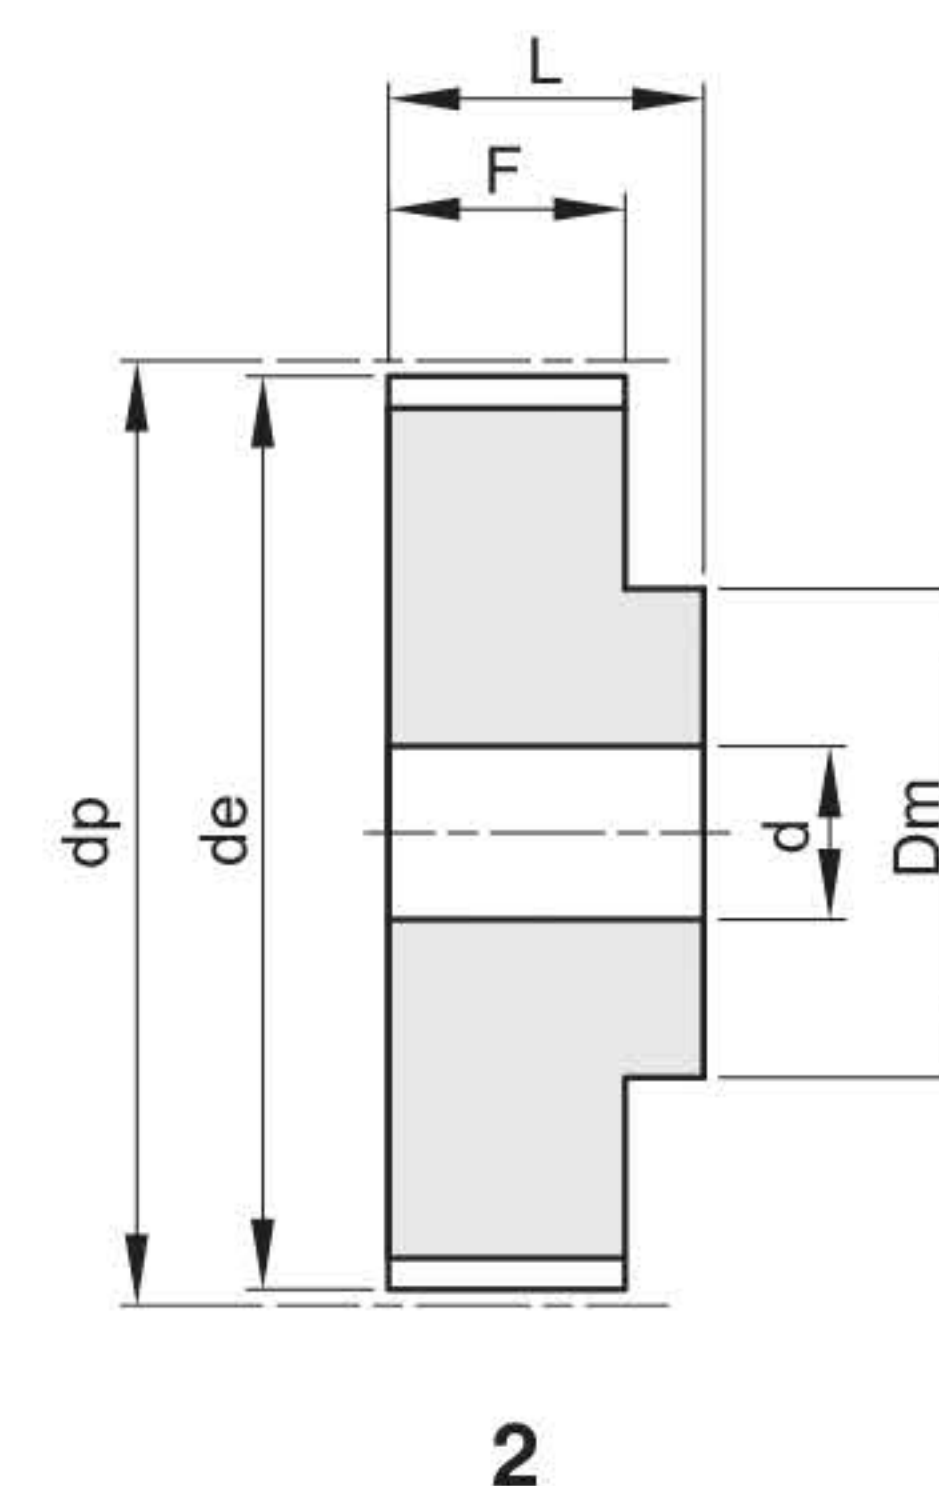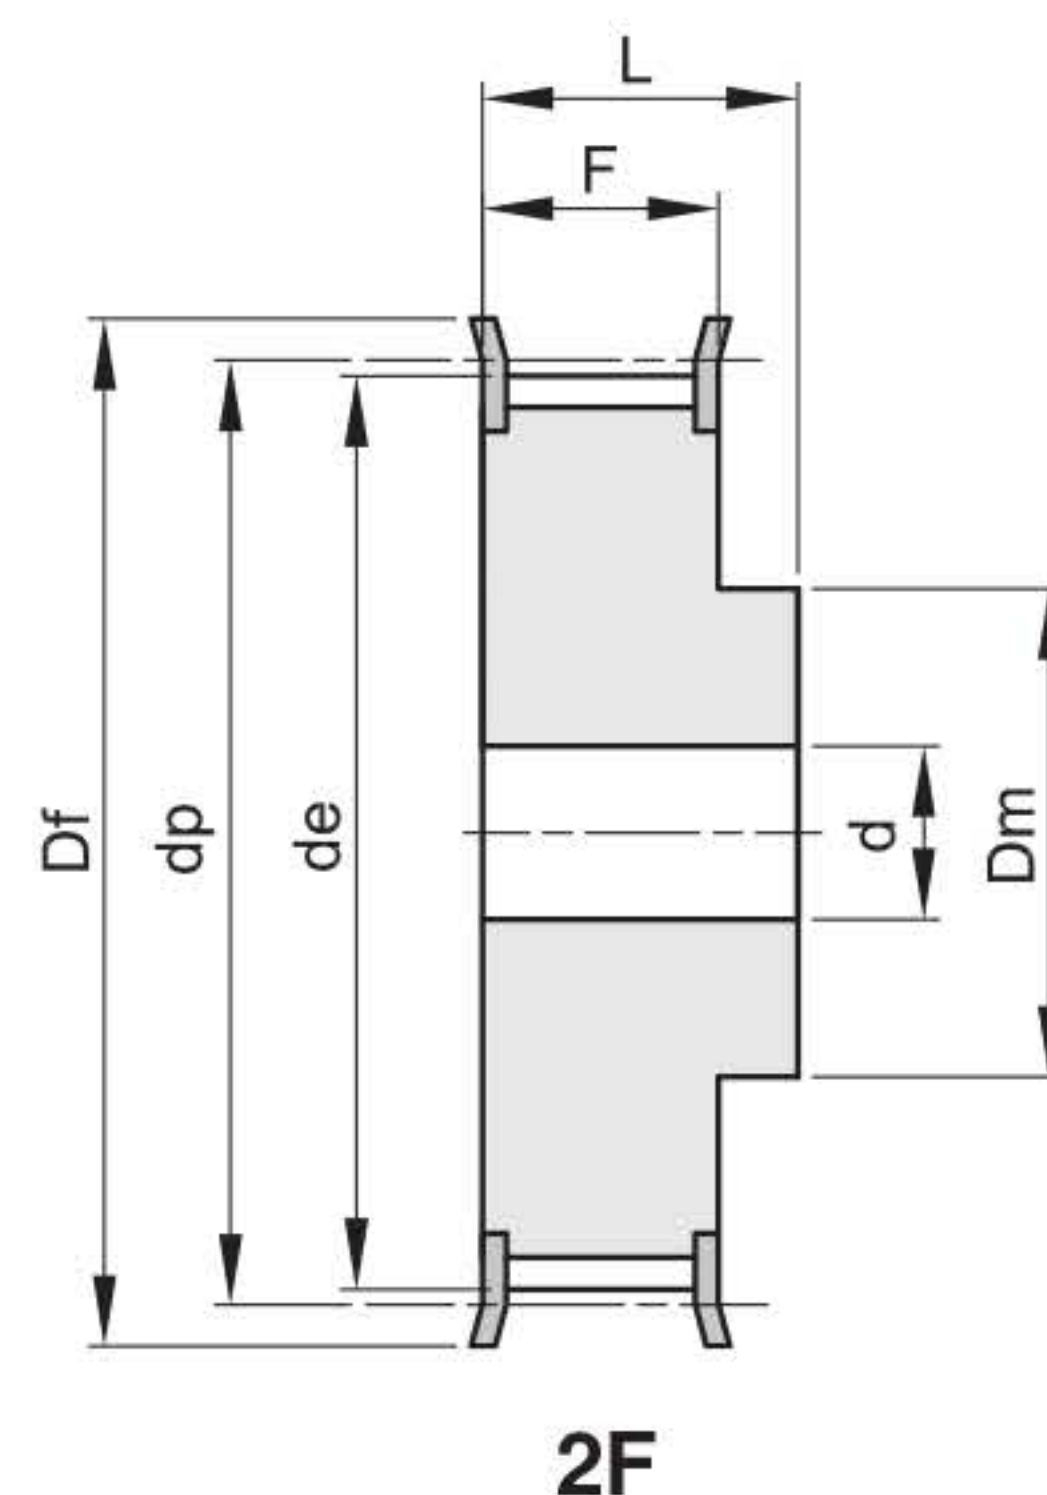


codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
10 T 5 25	2F	Al	10	15,05	19,5	8	30	36		200	0,02
12 T 5 25	2F	Al	12	18,25	23	10	30	36		201	0,03
14 T 5 25	2F	Al	14	21,45	25	13	30	36		203	0,04
15 T 5 25	2F	Al	15	23,05	28	16	30	36		204	0,04
16 T 5 25	2F	Al	16	24,60	32	18	30	36		205	0,05
18 T 5 25	2F	Al	18	27,80	32	20	30	36		205	0,06
19 T 5 25	2F	Al	19	29,40	36	22	30	36		206	0,07
20 T 5 25	2F	Al	20	31,00	36	23	30	36		206	0,08
22 T 5 25	2F	Al	22	34,25	38	24	30	36		207	0,08
24 T 5 25	2F	Al	24	37,40	42	26	30	36		208	0,11
25 T 5 25	2F	Al	25	38,95	44	26	30	36		209	0,12
26 T 5 25	2F	Al	26	40,60	44	26	30	36		209	0,12
27 T 5 25	2F	Al	27	42,20	48	30	30	36	8	210	0,13
28 T 5 25	2F	Al	28	43,75	48	32	30	36	8	210	0,14
30 T 5 25	2F	Al	30	46,95	51	34	30	36	8	211	0,15
32 T 5 25	2F	Al	32	50,10	54	38	30	36	8	212	0,18
36 T 5 25	2F	Al	36	56,45	63	38	30	36	8	215	0,23
40 T 5 25	2F	Al	40	62,85	66	40	30	36	8	216	0,28
42 T 5 25	2F	Al	42	66,00	71	40	30	36	8	217	0,29
44 T 5 25	2	Al	44	69,20		45	30	36	8		0,31
48 T 5 25	2	Al	48	75,55		50	30	36	8		0,40
60 T 5 25	2	Al	60	94,65		65	30	36	8		0,61

T 10

Passo 10 mm

Per cinghie larghezza 16 mm


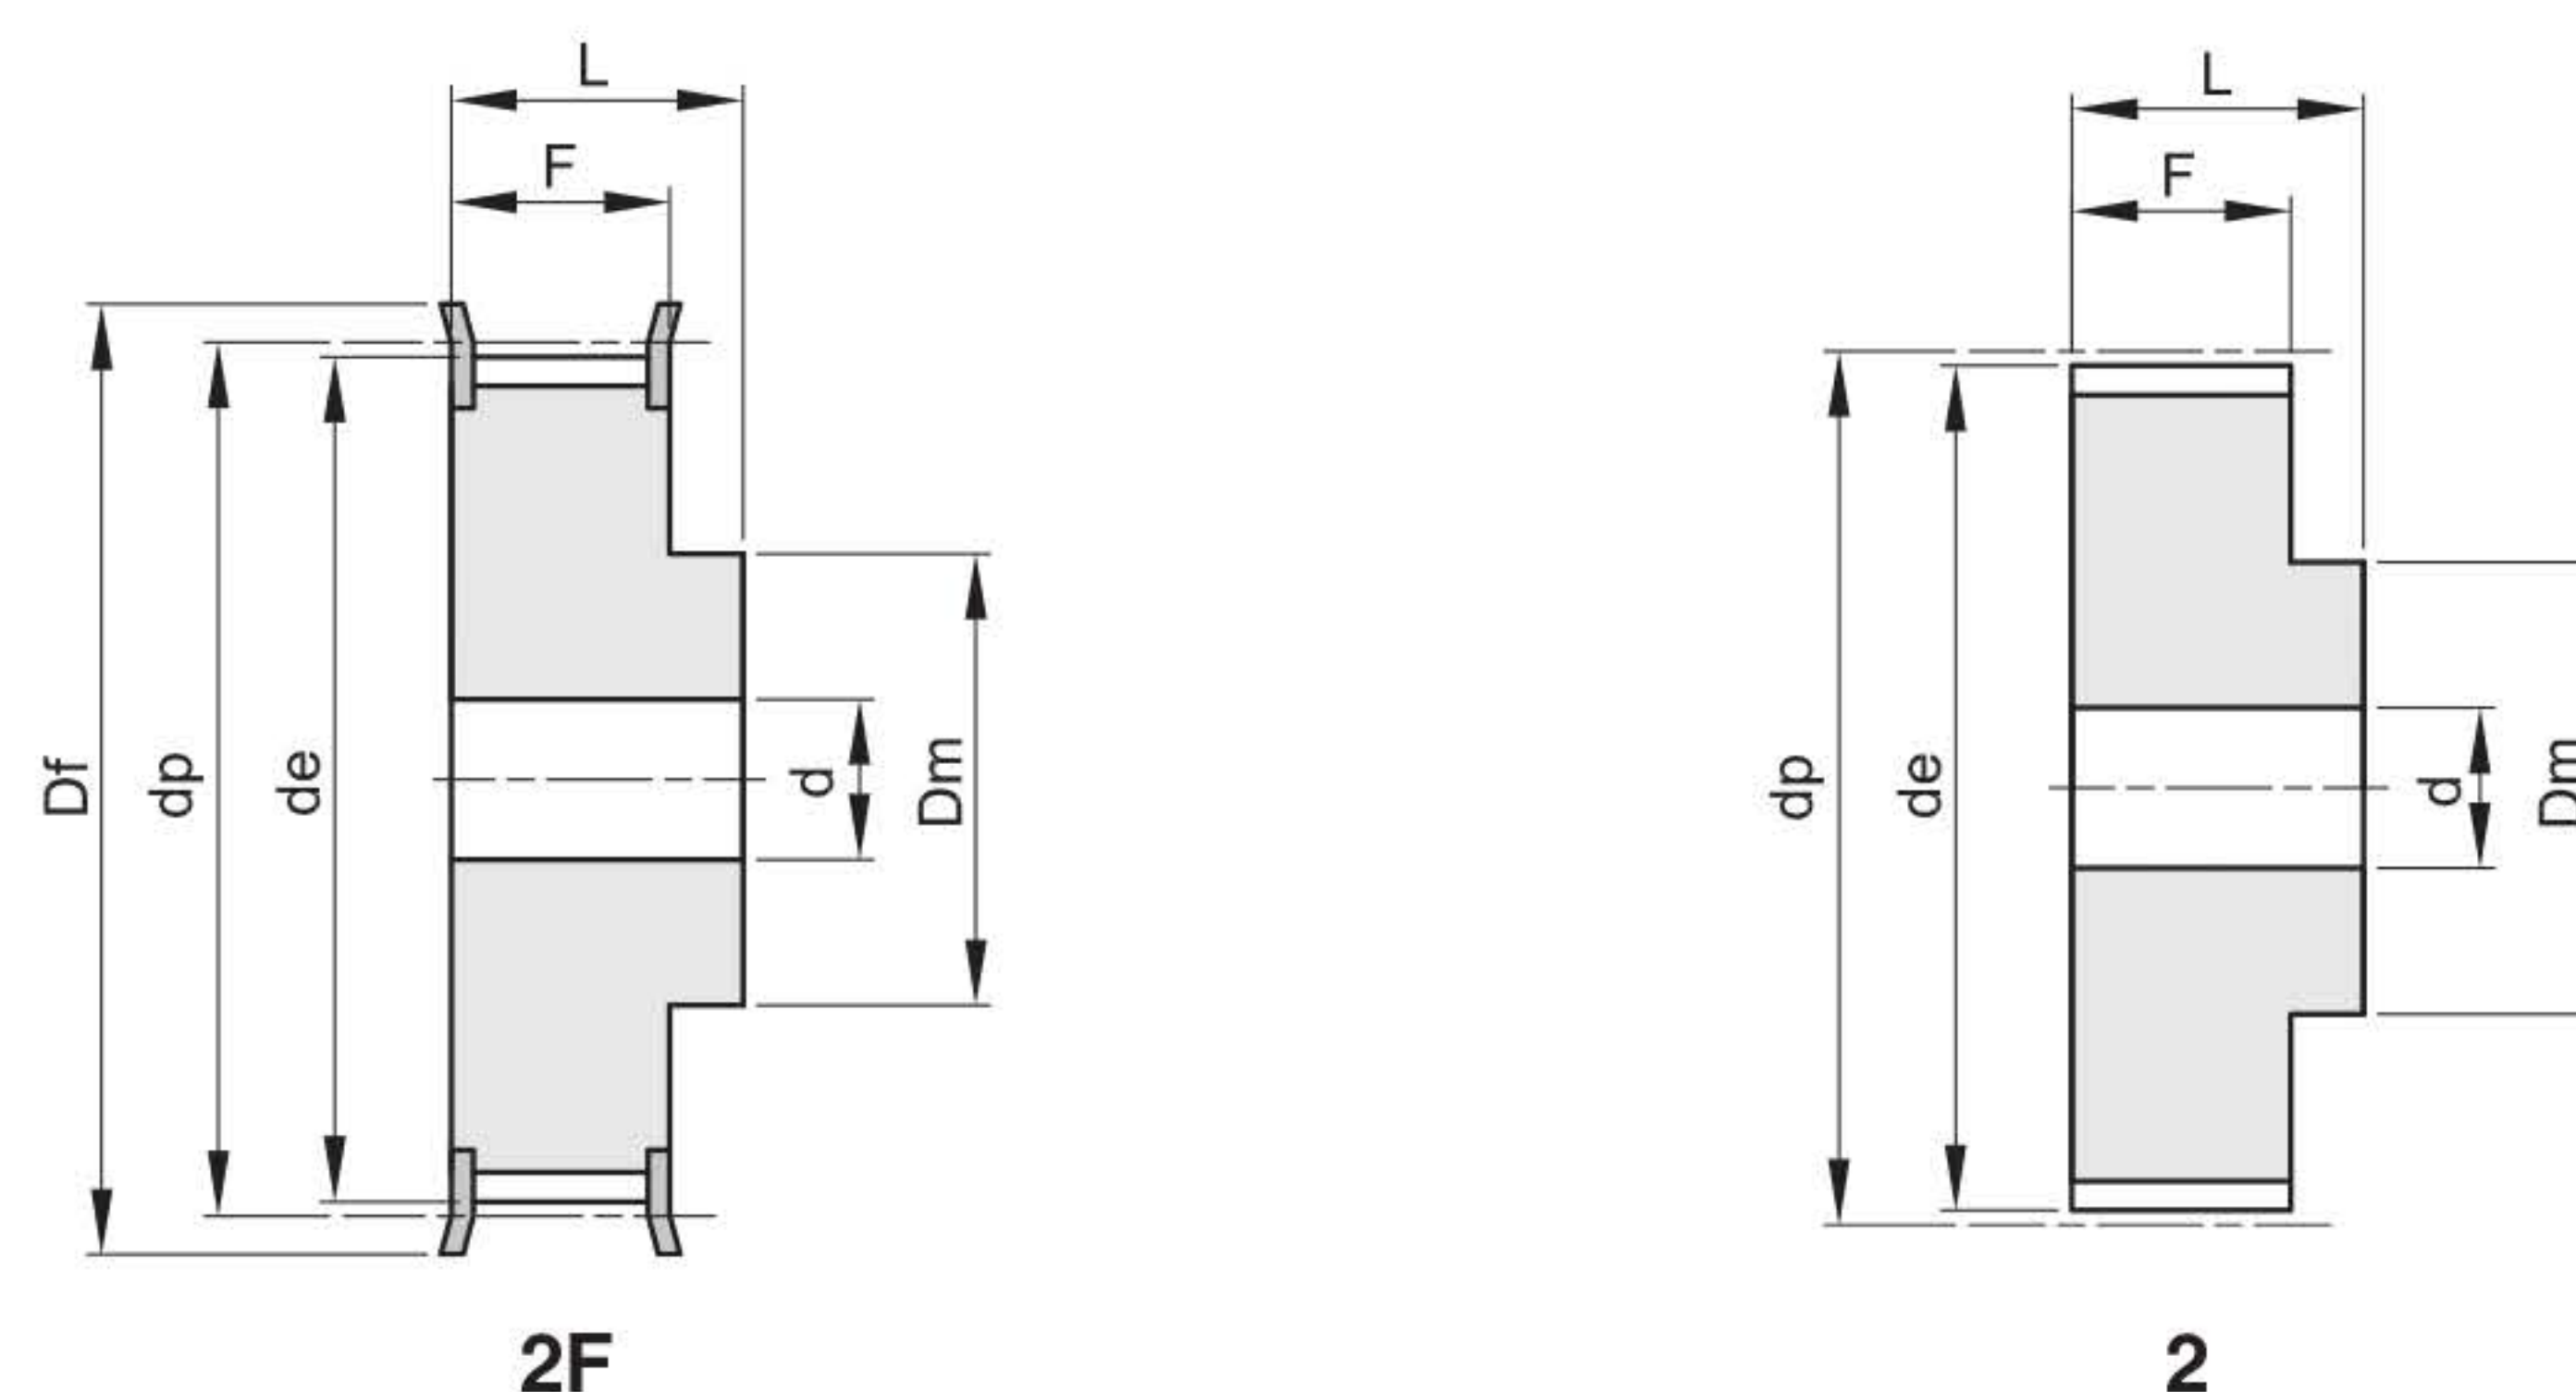


codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
12 T 10 16	2F	Al	12	36,35	42	28	21	31	6	208	0,08
14 T 10 16	2F	Al	14	42,70	48	32	21	31	8	210	0,10
15 T 10 16	2F	Al	15	45,90	51	32	21	31	8	211	0,12
16 T 10 16	2F	Al	16	49,10	54	35	21	31	8	212	0,13
18 T 10 16	2F	Al	18	55,45	60	40	21	31	8	214	0,17
19 T 10 16	2F	Al	19	58,65	66	44	21	31	8	216	0,18
20 T 10 16	2F	Al	20	61,80	66	46	21	31	8	216	0,21
22 T 10 16	2F	Al	22	68,20	75	52	21	31	8	218	0,25
24 T 10 16	2F	Al	24	74,55	83	58	21	31	8	219	0,29
25 T 10 16	2F	Al	25	77,75	83	60	21	31	8	219	0,31
26 T 10 16	2F	Al	26	80,90	87	60	21	31	8	220	0,36
27 T 10 16	2F	Al	27	84,10	91	60	21	31	8	221	0,37
28 T 10 16	2F	Al	28	87,25	93	60	21	31	8	222	0,40
30 T 10 16	2F	Al	30	93,65	97	60	21	31	8	223	0,44
32 T 10 16	2F	Al	32	100,00	106	65	21	31	10	224	0,49
36 T 10 16	2F	Al	36	112,75	119	70	21	31	10	225	0,62
40 T 10 16	2F	Al	40	125,45	131	80	21	31	10	226	0,77
44 T 10 16	2	Al	44	138,20		88	21	31	10		1,00
48 T 10 16	2	Al	48	150,95		95	21	31	16		1,10
60 T 10 16	2	Al	60	189,15		110	21	31	16		1,70

T 10

Passo 10 mm

Per cinghie larghezza 25 mm

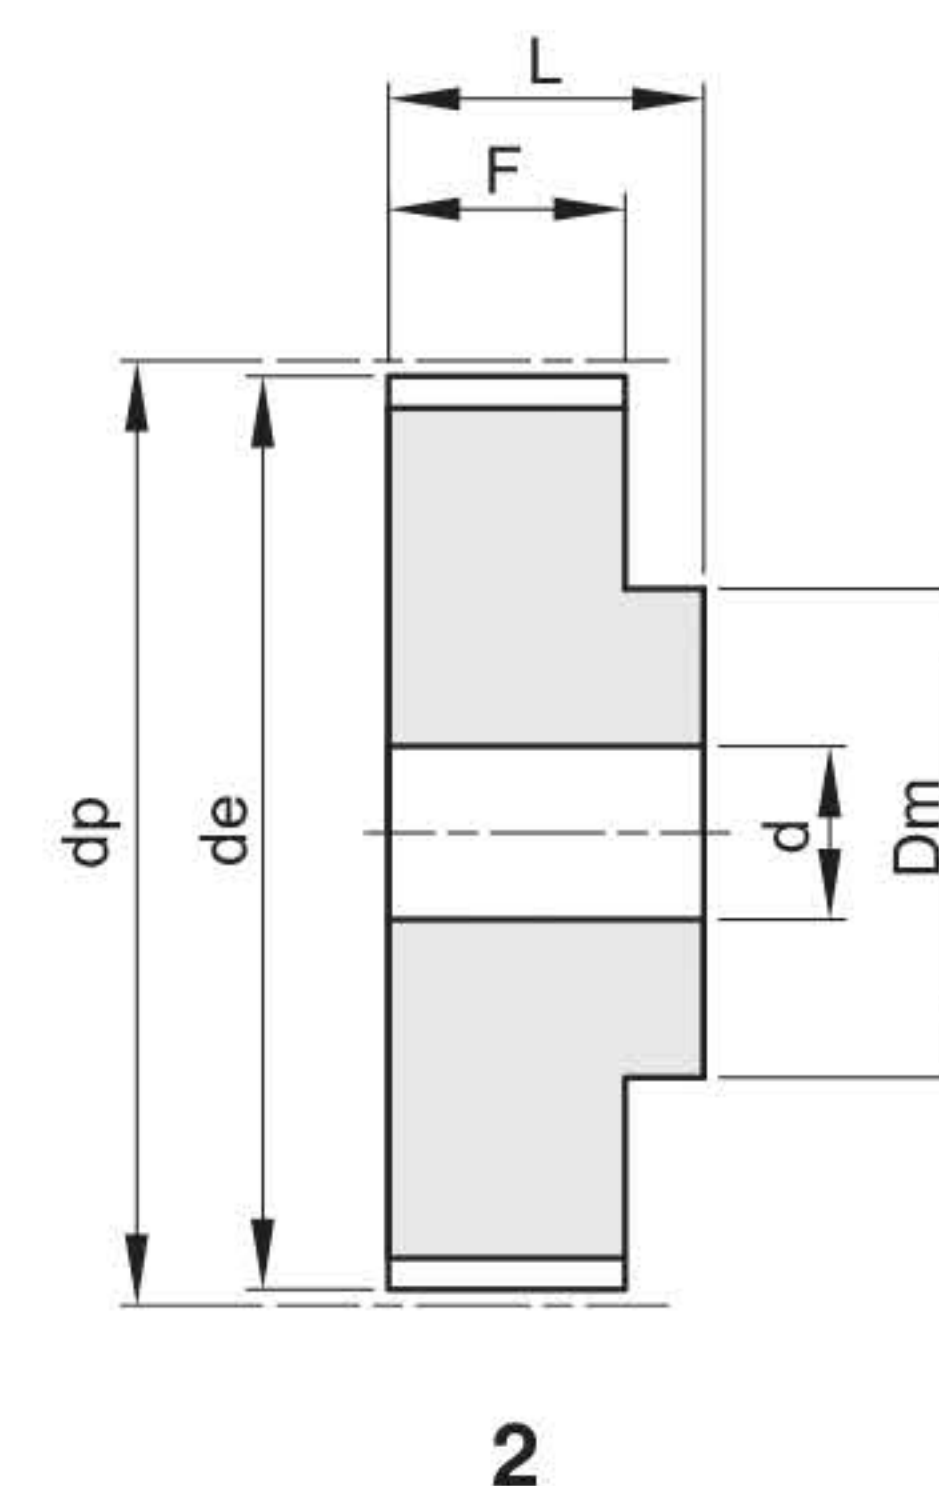
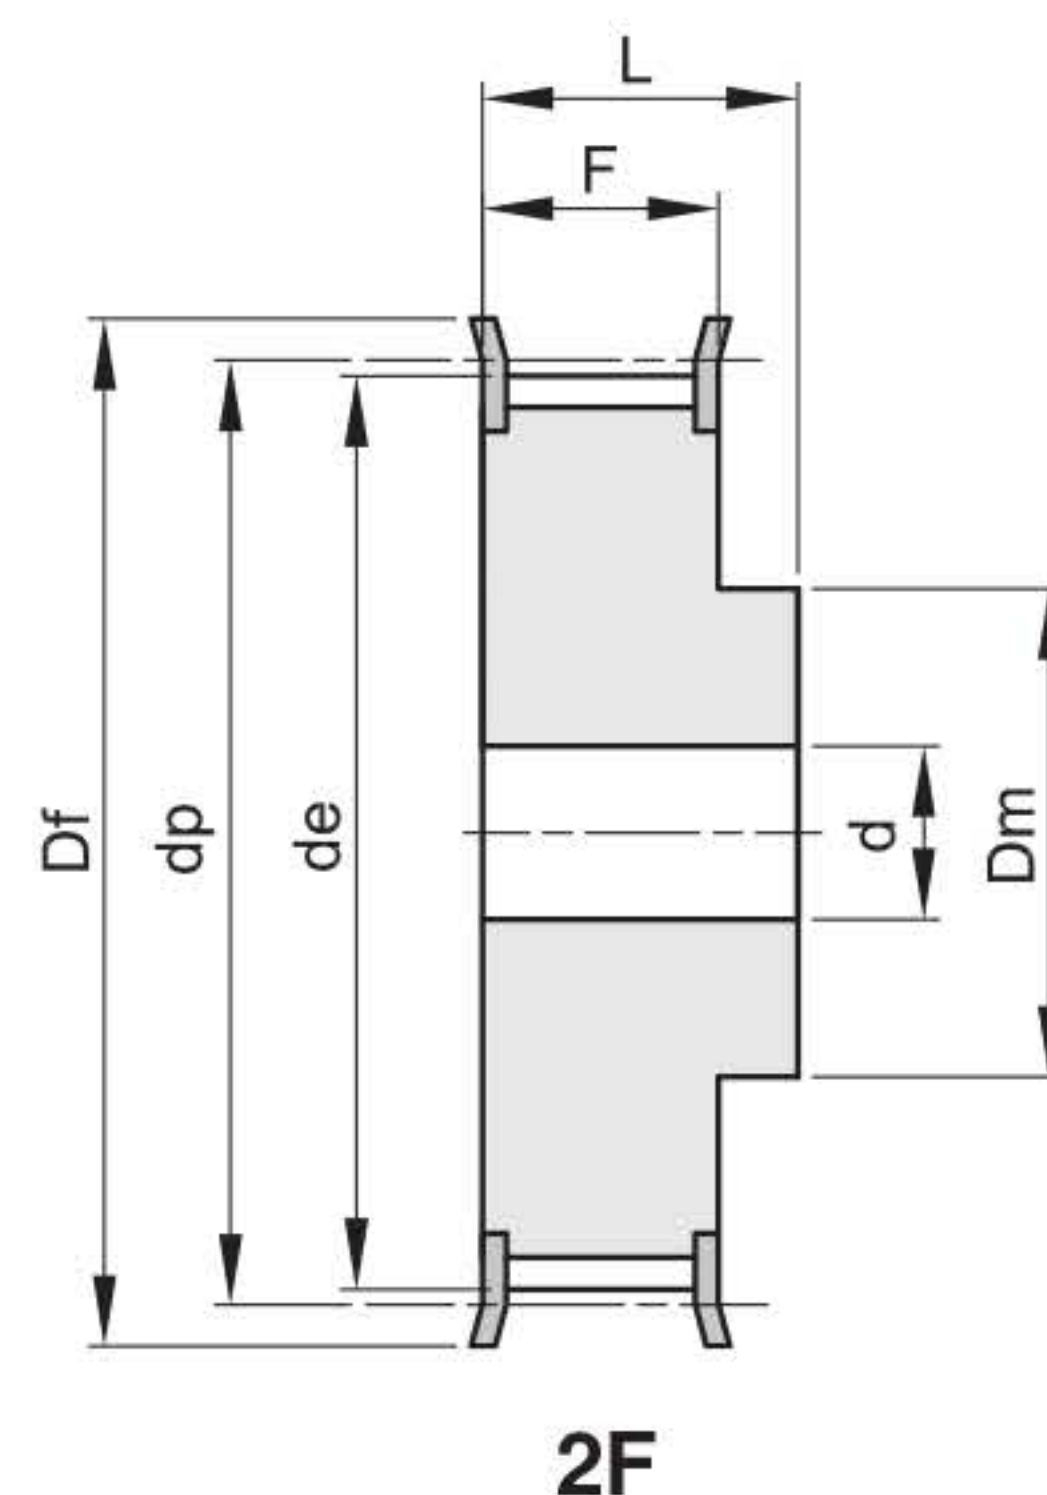


codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
12 T 10 25	2F	Al	12	36,35	42	28	30	40	6	208	0,10
14 T 10 25	2F	Al	14	42,70	48	32	30	40	8	210	0,13
15 T 10 25	2F	Al	15	45,90	51	32	30	40	8	211	0,15
16 T 10 25	2F	Al	16	49,10	54	35	30	40	8	212	0,18
18 T 10 25	2F	Al	18	55,45	60	40	30	40	8	214	0,22
19 T 10 25	2F	Al	19	58,65	66	44	30	40	8	216	0,25
20 T 10 25	2F	Al	20	61,80	66	46	30	40	8	216	0,28
22 T 10 25	2F	Al	22	68,20	75	52	30	40	8	218	0,34
24 T 10 25	2F	Al	24	74,55	83	58	30	40	8	219	0,39
25 T 10 25	2F	Al	25	77,75	83	60	30	40	8	219	0,42
26 T 10 25	2F	Al	26	80,90	87	60	30	40	8	220	0,48
27 T 10 25	2F	Al	27	84,10	91	60	30	40	8	221	0,54
28 T 10 25	2F	Al	28	87,25	93	60	30	40	8	222	0,55
30 T 10 25	2F	Al	30	93,65	97	60	30	40	8	223	0,64
32 T 10 25	2F	Al	32	100,00	106	65	30	40	10	224	0,69
36 T 10 25	2F	Al	36	112,75	119	70	30	40	10	225	0,87
40 T 10 25	2F	Al	40	125,45	131	80	30	40	10	226	1,07
44 T 10 25	2	Al	44	138,20		88	30	40	10		1,35
48 T 10 25	2	Al	48	150,95		95	30	40	16		1,52
60 T 10 25	2	Al	60	189,15		110	30	40	16		2,34

T 10

Passo 10 mm

Per cinghie larghezza 32 mm

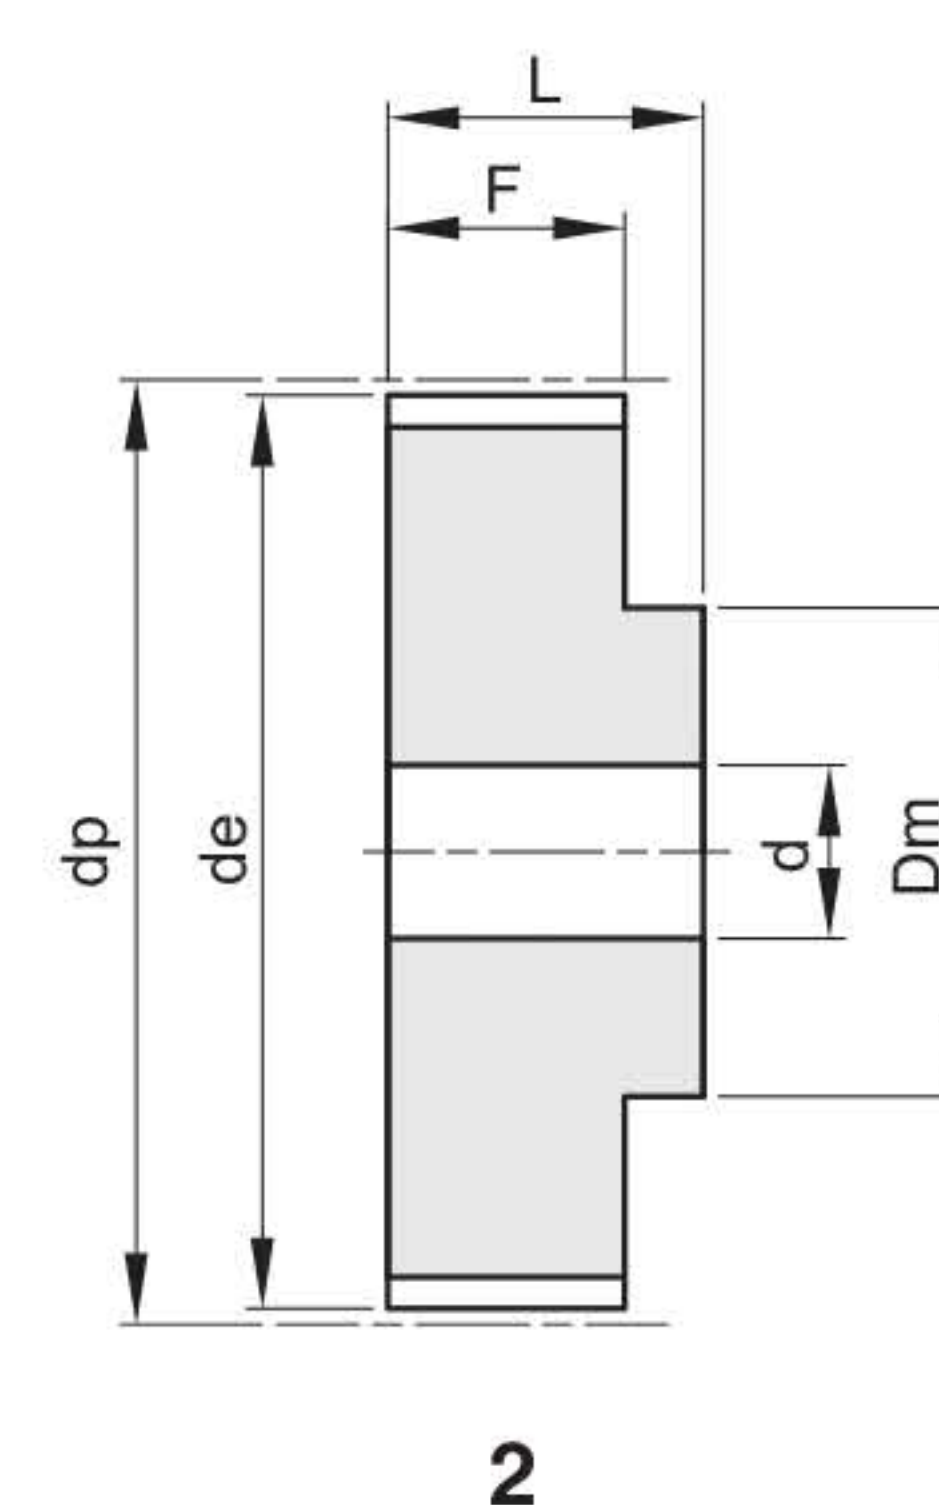
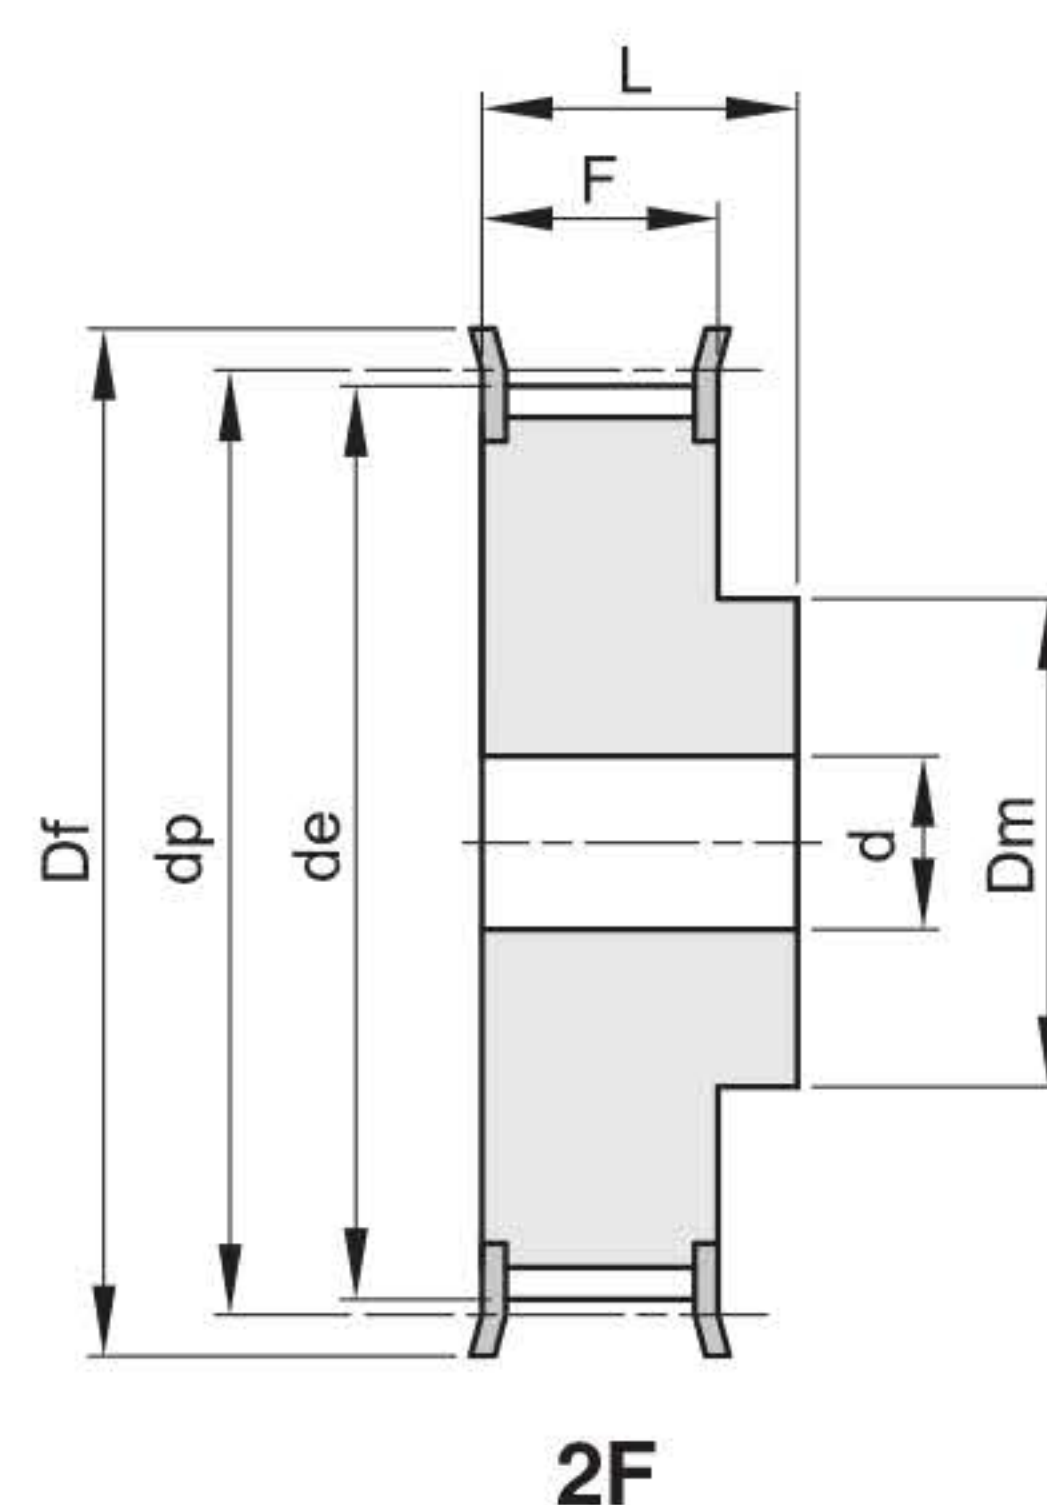


codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
18 T 10 32	2F	Al	18	55,45	60	40	37	47	10	214	0,25
19 T 10 32	2F	Al	19	58,65	66	44	37	47	10	216	0,29
20 T 10 32	2F	Al	20	61,80	66	46	37	47	12	216	0,32
22 T 10 32	2F	Al	22	68,20	75	52	37	47	12	218	0,39
24 T 10 32	2F	Al	24	74,55	83	58	37	47	12	219	0,47
25 T 10 32	2F	Al	25	77,75	83	60	37	47	12	219	0,53
26 T 10 32	2F	Al	26	80,90	87	60	37	47	12	220	0,56
27 T 10 32	2F	Al	27	84,10	91	60	37	47	12	221	0,60
28 T 10 32	2F	Al	28	87,25	93	60	37	47	12	222	0,64
30 T 10 32	2F	Al	30	93,65	97	60	37	47	12	223	0,74
32 T 10 32	2F	Al	32	100,00	106	65	37	47	12	224	0,84
36 T 10 32	2F	Al	36	112,75	119	70	37	47	16	225	1,06
40 T 10 32	2F	Al	40	125,45	131	80	37	47	16	226	1,32
44 T 10 32	2	Al	44	138,20		88	37	47	16		1,61
48 T 10 32	2	Al	48	150,95		95	37	47	16		1,93
60 T 10 32	2	Al	60	189,10		110	37	47	16		3,00

T 10

Passo 10 mm

Per cinghie larghezza 50 mm

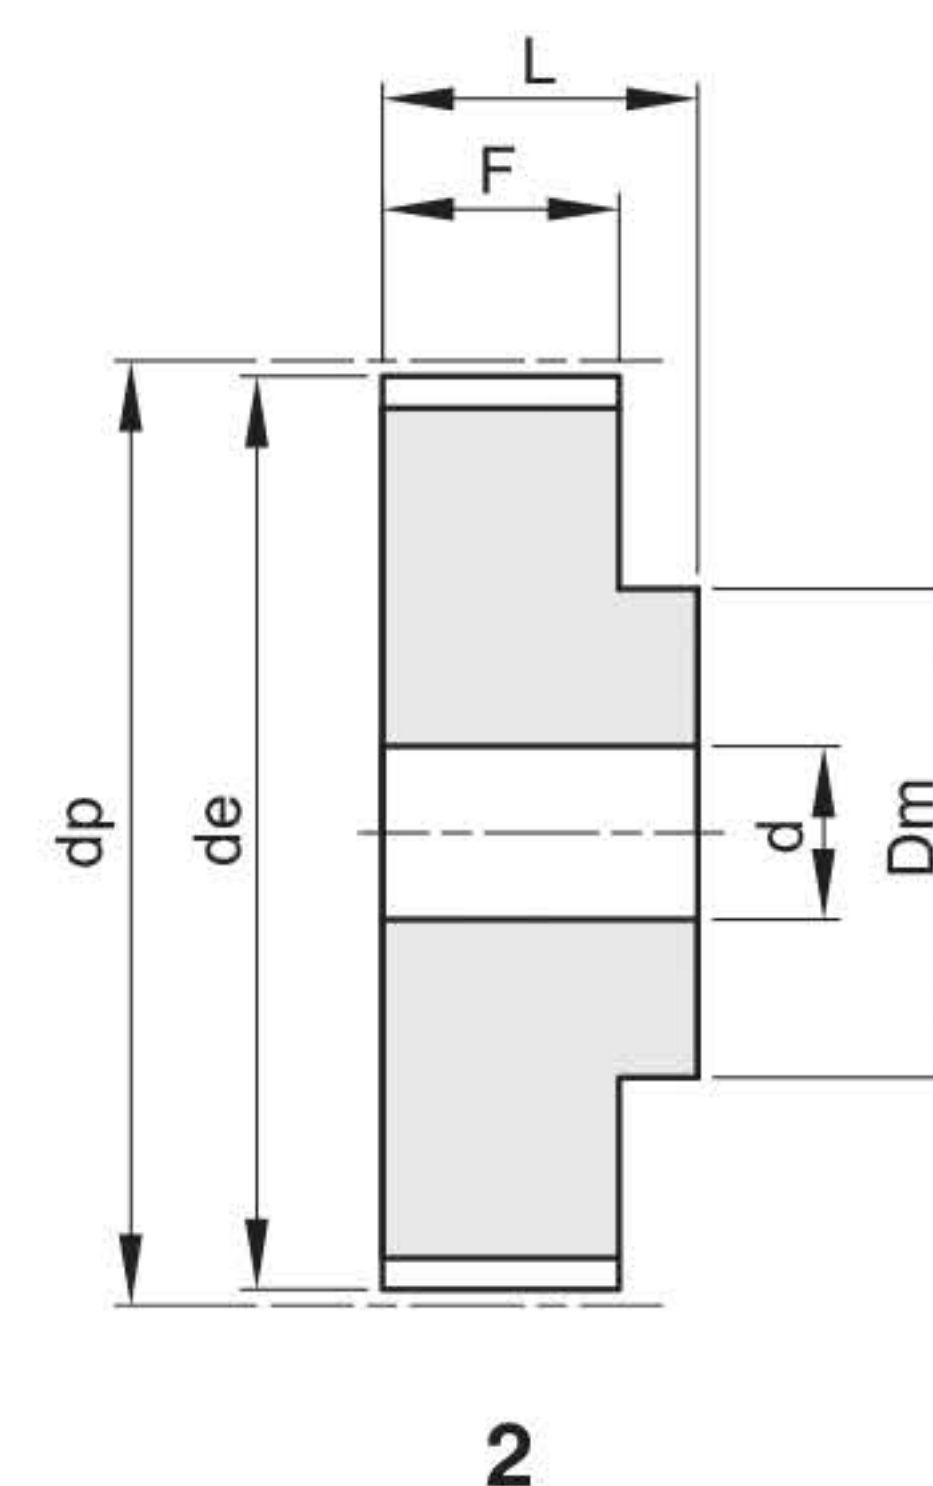
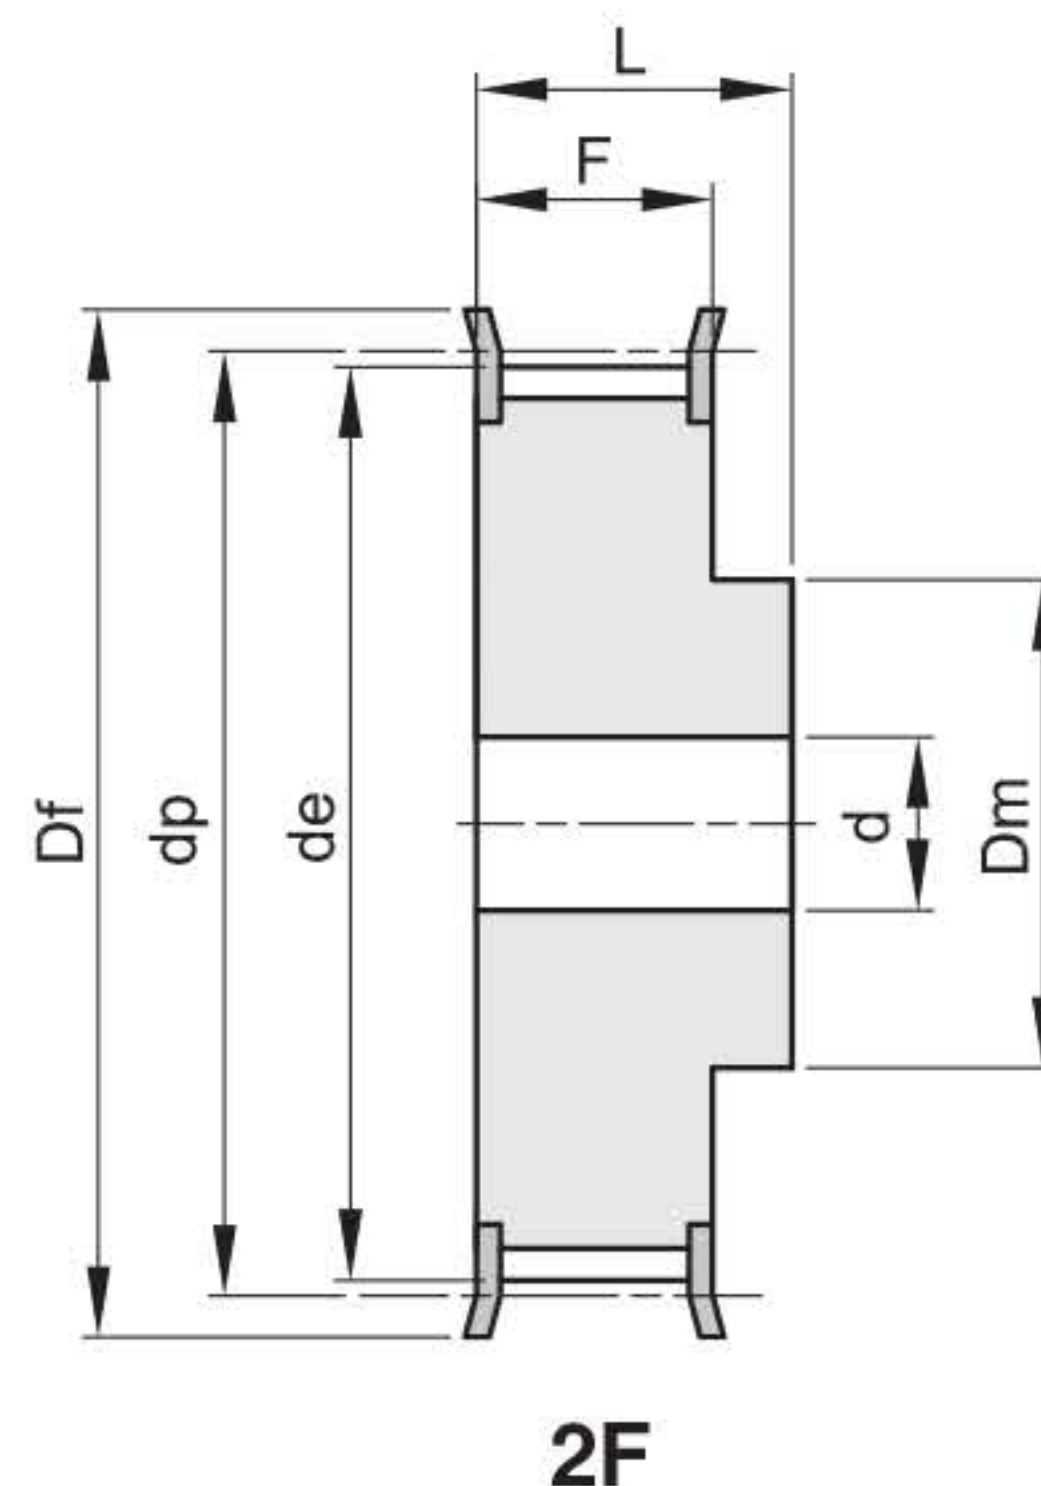


codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
18 T 10 50	2F	Al	18	55,45	60	40	56	66	10	214	0,42
19 T 10 50	2F	Al	19	58,65	66	44	56	66	10	216	0,47
20 T 10 50	2F	Al	20	61,80	66	46	56	66	12	216	0,52
22 T 10 50	2F	Al	22	68,20	75	52	56	66	12	218	0,57
24 T 10 50	2F	Al	24	74,55	83	58	56	66	12	219	0,74
25 T 10 50	2F	Al	25	77,75	83	60	56	66	12	219	0,77
26 T 10 50	2F	Al	26	80,90	87	60	56	66	12	220	0,82
27 T 10 50	2F	Al	27	84,10	91	60	56	66	12	221	0,95
28 T 10 50	2F	Al	28	87,25	93	60	56	66	12	222	0,96
30 T 10 50	2F	Al	30	93,65	97	60	56	66	12	223	1,17
32 T 10 50	2F	Al	32	100,00	106	65	56	66	12	224	1,30
36 T 10 50	2F	Al	36	112,75	119	70	56	66	16	225	1,64
40 T 10 50	2F	Al	40	125,45	131	80	56	66	16	226	2,00
44 T 10 50	2	Al	44	138,20		88	56	66	16		2,36
48 T 10 50	2	Al	48	150,95		95	56	66	16		2,83
60 T 10 50	2	Al	60	189,10		110	56	66	16		4,37

AT 5

Passo 5 mm

Per cinghie AT larghezza 10 mm

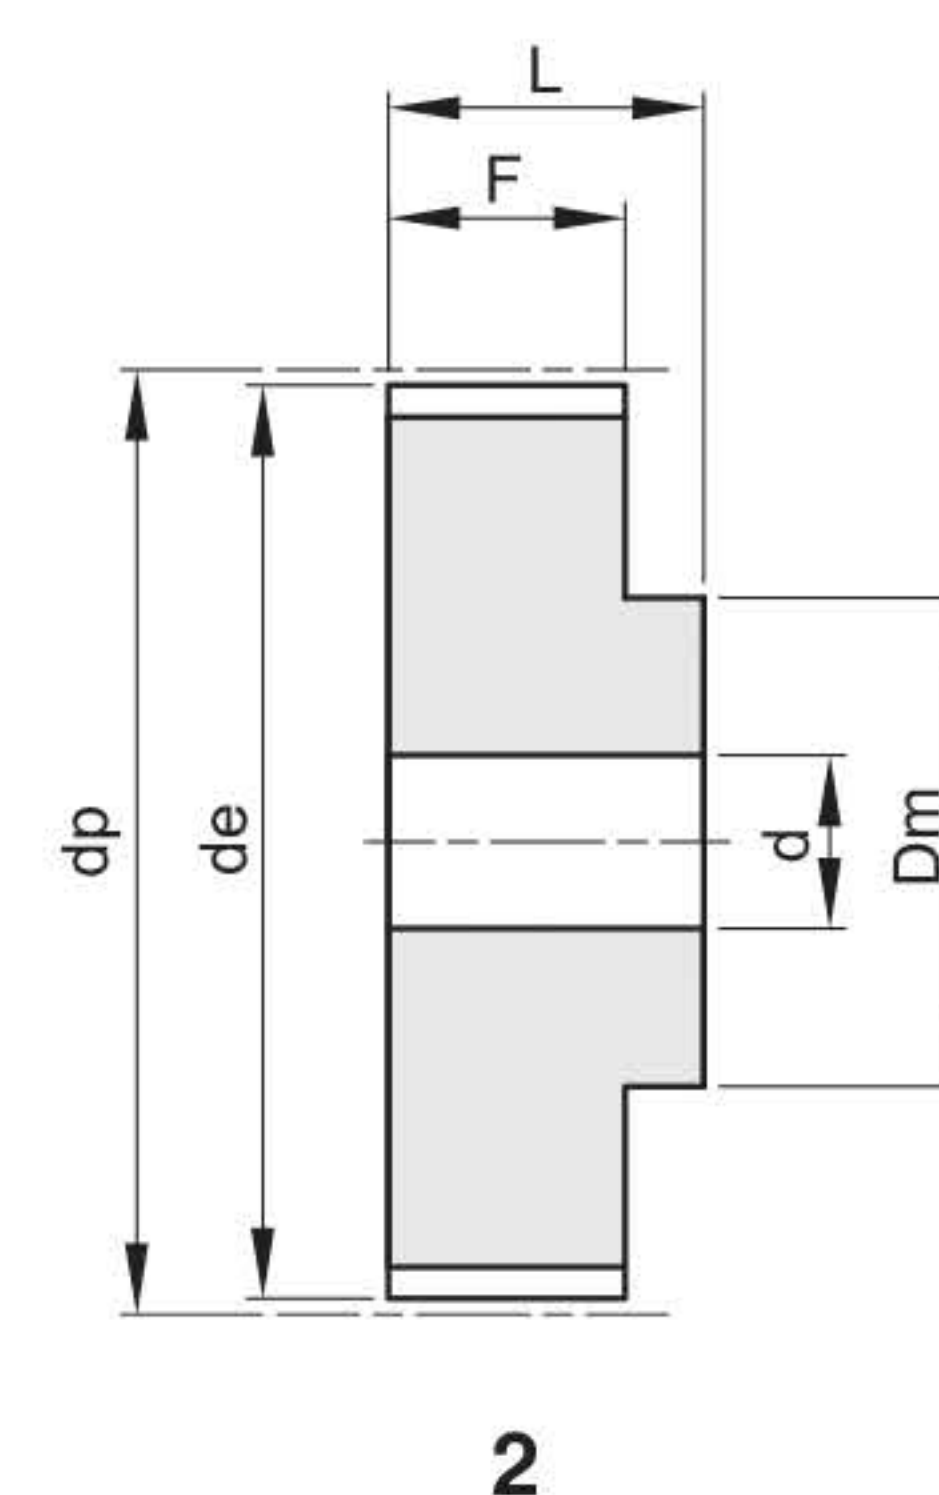
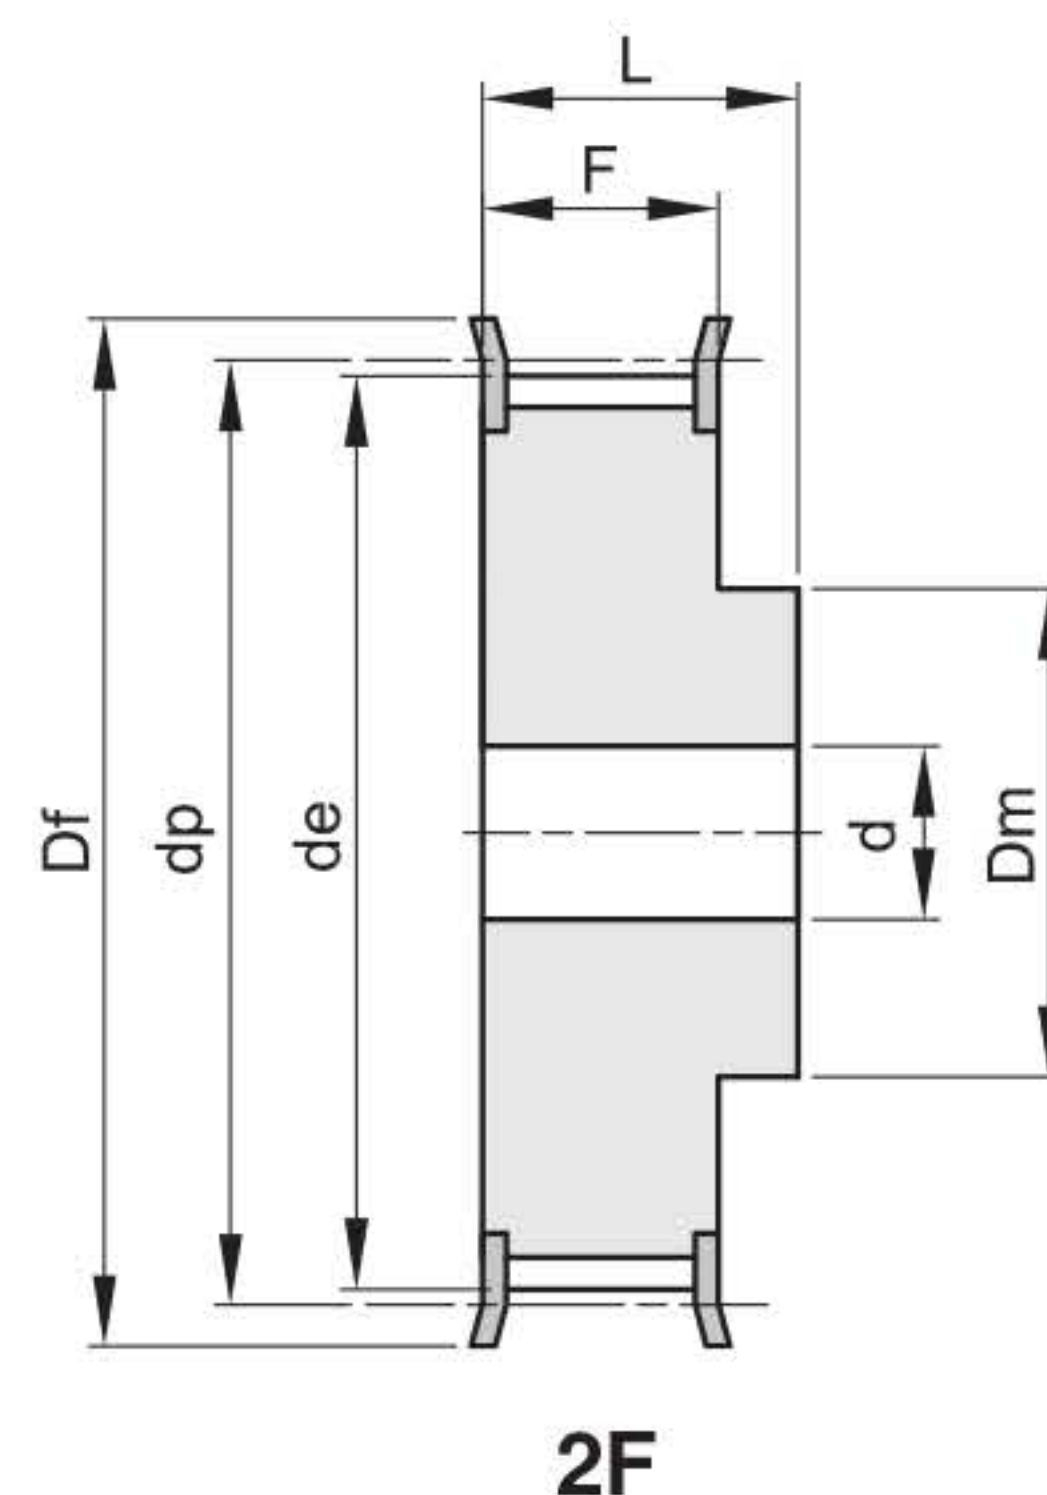


codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
12 AT 5 10	2F	Al	12	17,85	23	10	15	21		201	0,01
14 AT 5 10	2F	Al	14	21,05	25	13	15	21		203	0,02
15 AT 5 10	2F	Al	15	22,65	28	16	15	21		204	0,02
16 AT 5 10	2F	Al	16	24,20	32	18	15	21		205	0,03
18 AT 5 10	2F	Al	18	27,40	32	20	15	21		205	0,03
19 AT 5 10	2F	Al	19	29,00	36	22	15	21		206	0,04
20 AT 5 10	2F	Al	20	30,60	36	23	15	21		206	0,04
22 AT 5 10	2F	Al	22	33,85	38	24	15	21		207	0,05
24 AT 5 10	2F	Al	24	37,00	42	26	15	21		208	0,06
25 AT 5 10	2F	Al	25	38,55	44	26	15	21		209	0,06
26 AT 5 10	2F	Al	26	40,20	44	26	15	21		209	0,06
27 AT 5 10	2F	Al	27	41,80	48	30	15	21	8	210	0,07
28 AT 5 10	2F	Al	28	43,35	48	32	15	21	8	210	0,07
30 AT 5 10	2F	Al	30	46,55	51	34	15	21	8	211	0,07
32 AT 5 10	2F	Al	32	49,70	54	38	15	21	8	212	0,09
36 AT 5 10	2F	Al	36	56,05	63	38	15	21	8	215	0,11
40 AT 5 10	2F	Al	40	62,45	66	40	15	21	8	216	0,14
42 AT 5 10	2F	Al	42	65,60	71	40	15	21	8	217	0,18
44 AT 5 10	2	Al	44	68,80		45	15	21	8		0,18
48 AT 5 10	2	Al	48	75,15		50	15	21	8		0,20
60 AT 5 10	2	Al	60	94,25		65	15	21	8		0,31

AT 5

Passo 5 mm

Per cinghie AT larghezza 16 mm

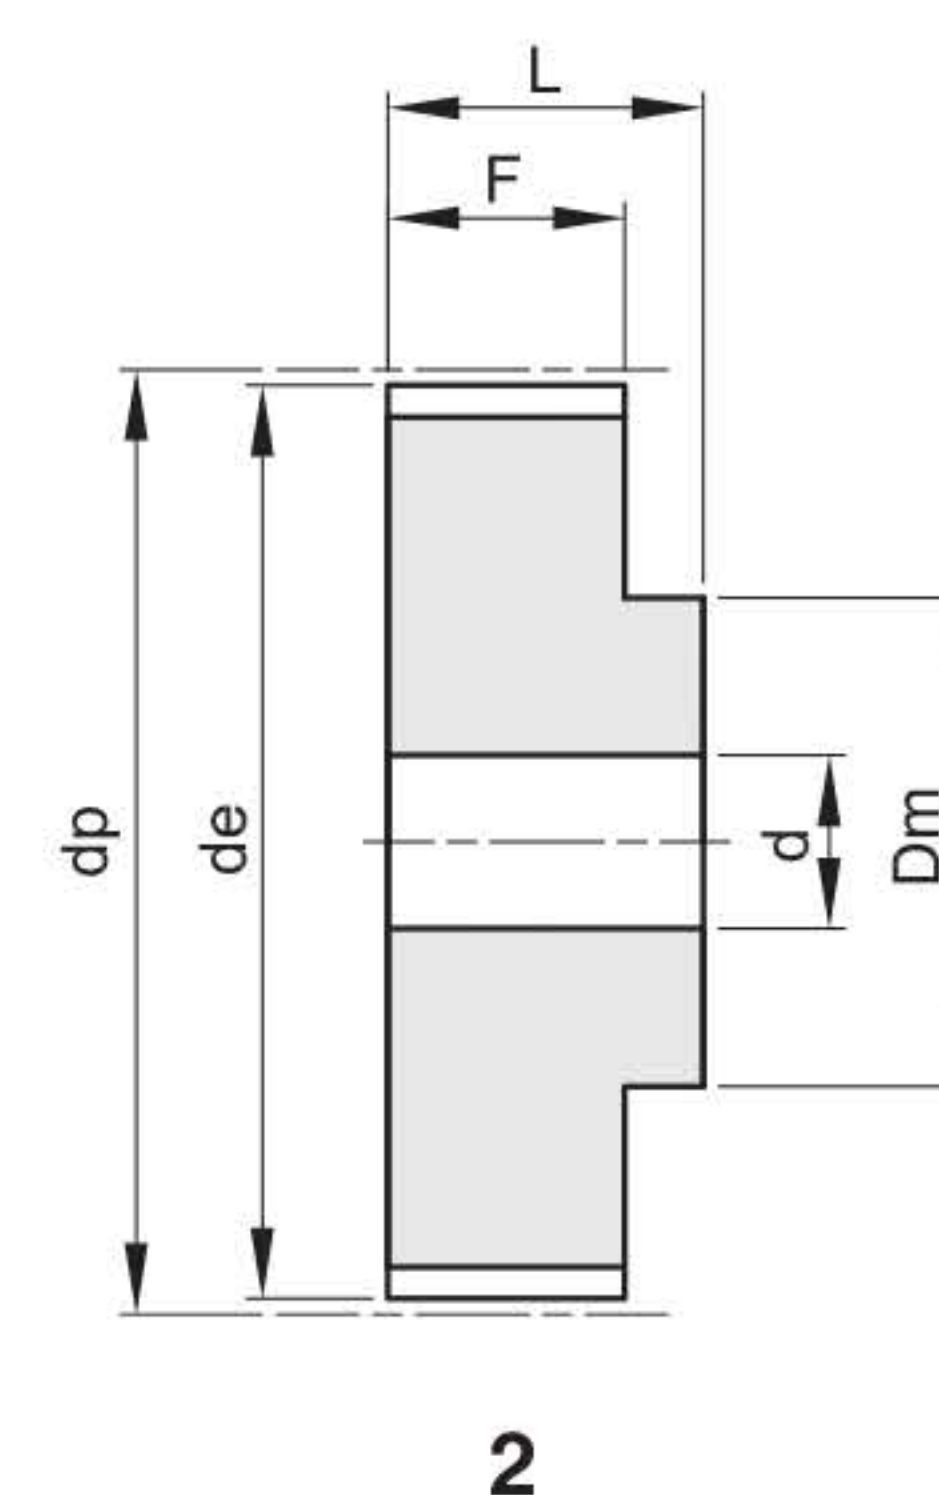
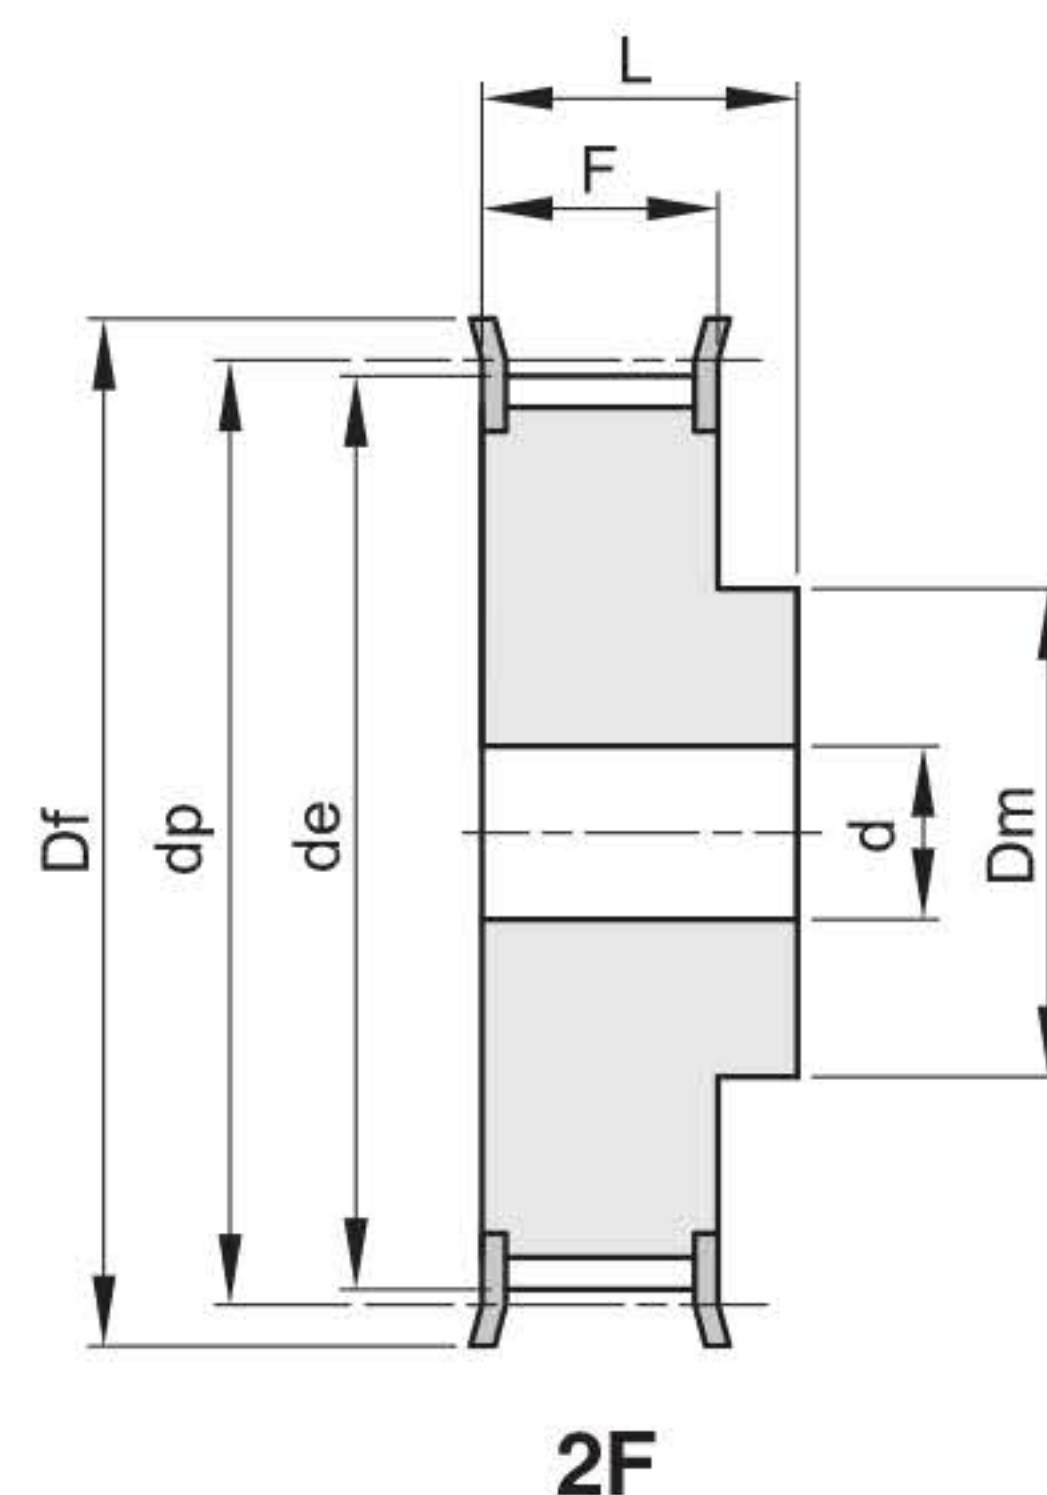


codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
12 AT 5 16	2F	Al	12	17,85	23	10	21	27		201	0,02
14 AT 5 16	2F	Al	14	21,05	25	13	21	27		203	0,03
15 AT 5 16	2F	Al	15	22,65	28	16	21	27		204	0,03
16 AT 5 16	2F	Al	16	24,20	32	18	21	27		205	0,04
18 AT 5 16	2F	Al	18	27,40	32	20	21	27		205	0,04
19 AT 5 16	2F	Al	19	29,00	36	22	21	27		206	0,05
20 AT 5 16	2F	Al	20	30,60	36	23	21	27		206	0,06
22 AT 5 16	2F	Al	22	33,85	38	24	21	27		207	0,06
24 AT 5 16	2F	Al	24	37,00	42	26	21	27		208	0,08
25 AT 5 16	2F	Al	25	38,55	44	26	21	27		209	0,08
26 AT 5 16	2F	Al	26	40,20	44	26	21	27		209	0,09
27 AT 5 16	2F	Al	27	41,80	48	30	21	27	8	210	0,09
28 AT 5 16	2F	Al	28	43,35	48	32	21	27	8	210	0,09
30 AT 5 16	2F	Al	30	46,55	51	34	21	27	8	211	0,10
32 AT 5 16	2F	Al	32	49,70	54	38	21	27	8	212	0,12
36 AT 5 16	2F	Al	36	56,05	63	38	21	27	8	215	0,16
40 AT 5 16	2F	Al	40	62,45	66	40	21	27	8	216	0,19
42 AT 5 16	2F	Al	42	65,60	71	40	21	27	8	217	0,20
44 AT 5 16	2	Al	44	68,80		45	21	27	8		0,23
48 AT 5 16	2	Al	48	75,15		50	21	27	8		0,28
60 AT 5 16	2	Al	60	94,25		65	21	27	8		0,43

AT 5

Passo 5 mm

Per cinghie AT larghezza 25 mm

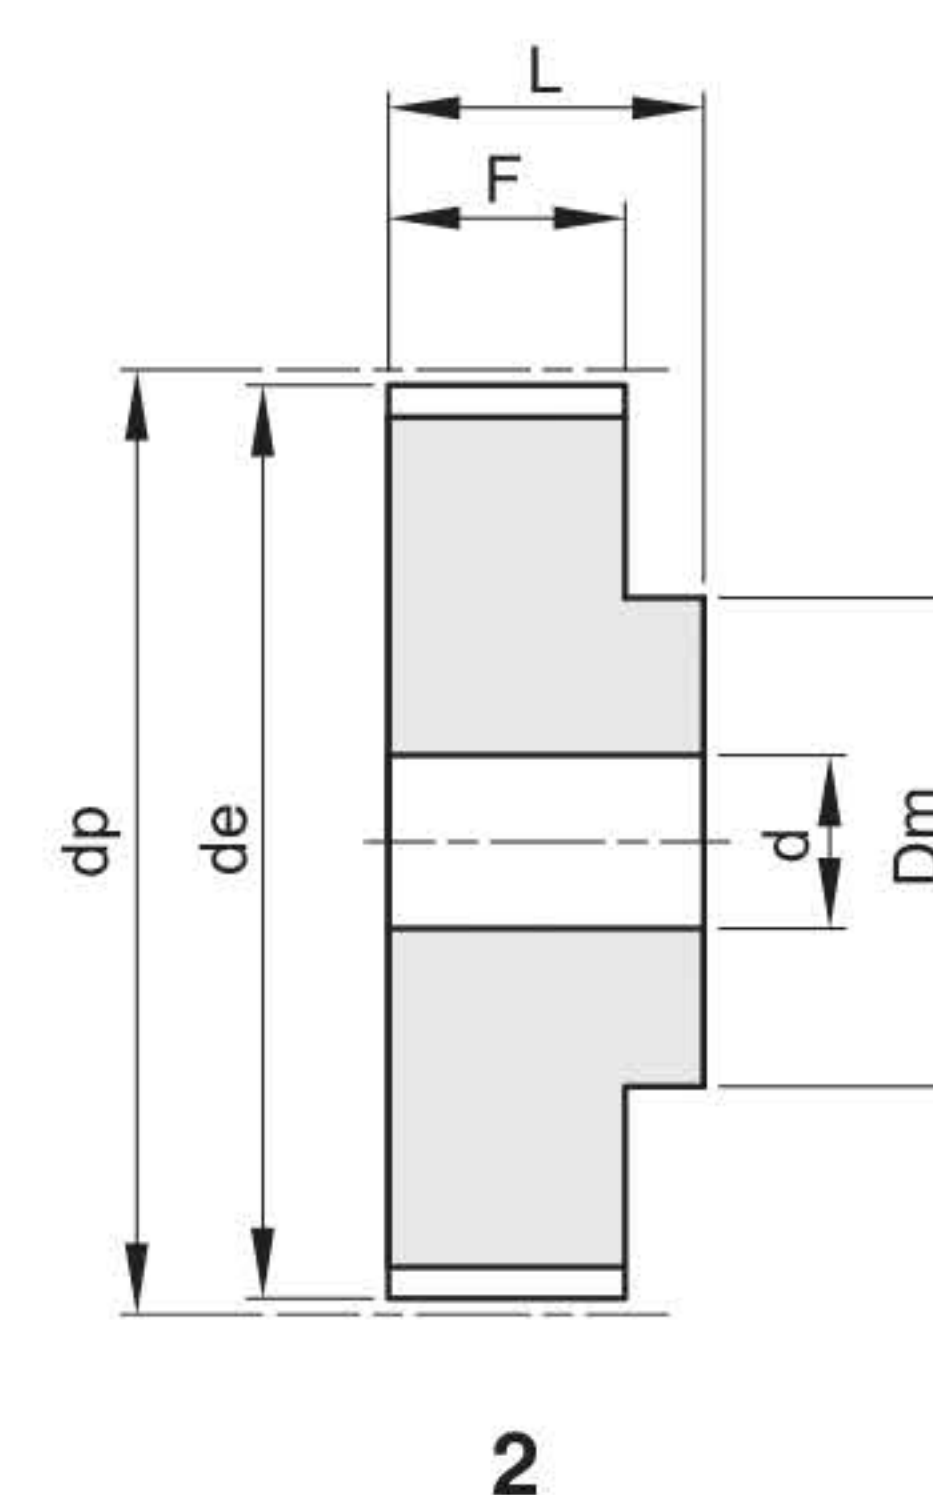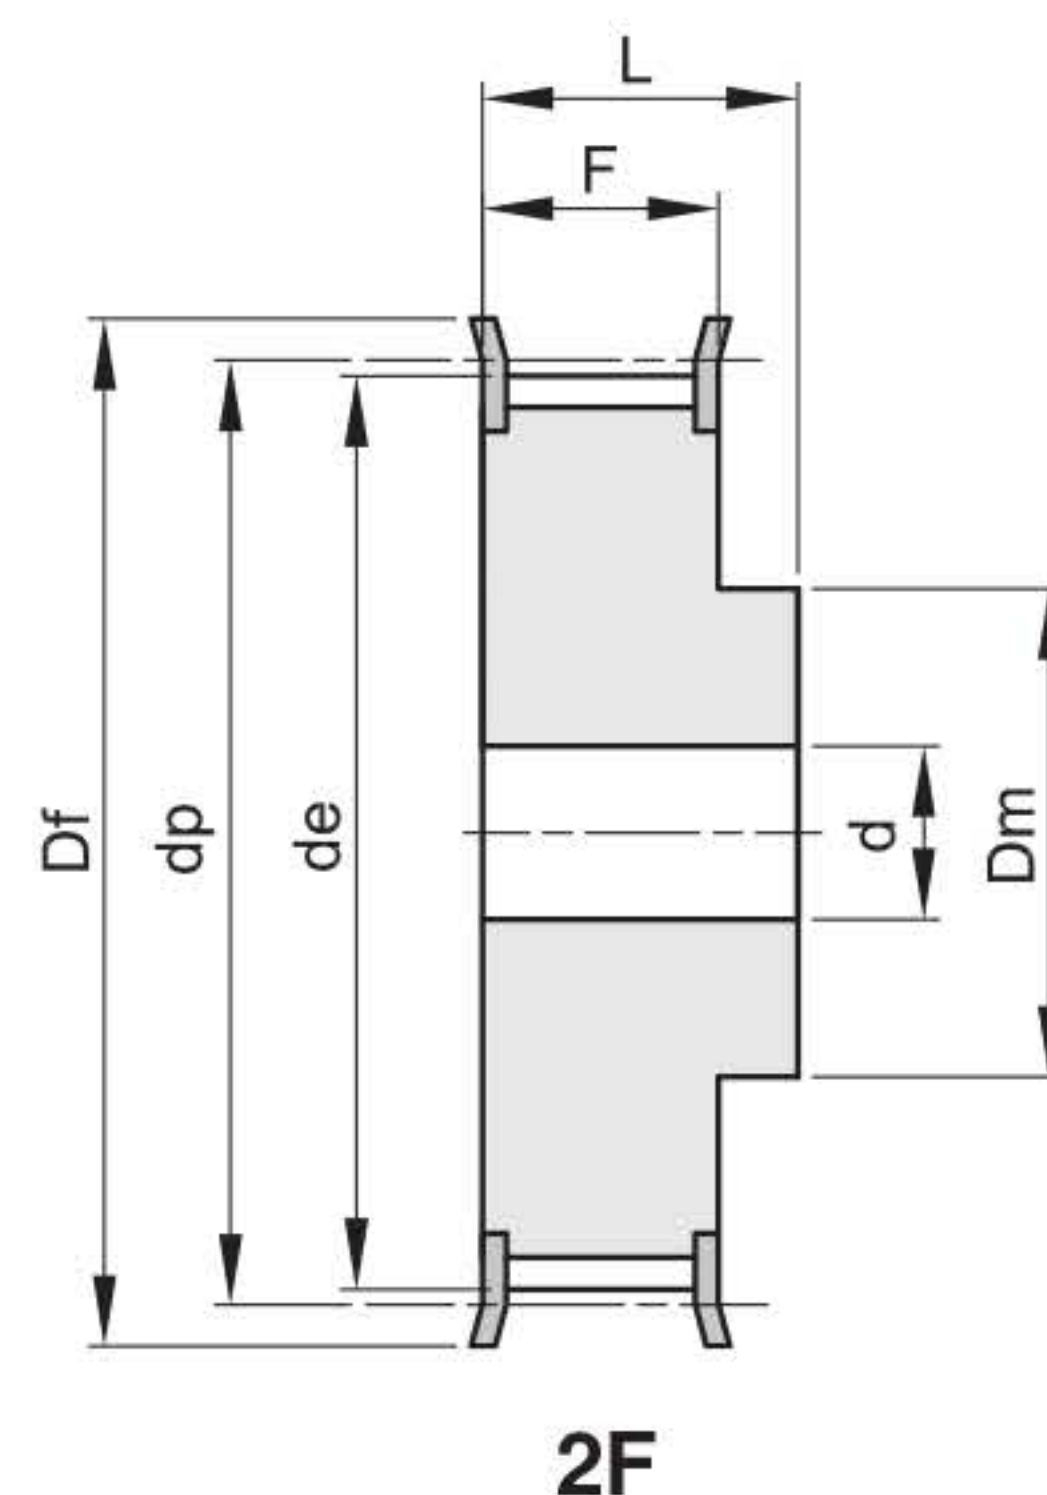


codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
12 AT 5 25	2F	Al	12	17,85	23	10	30	36		201	0,03
14 AT 5 25	2F	Al	14	21,05	25	13	30	36		203	0,04
15 AT 5 25	2F	Al	15	22,65	28	16	30	36		204	0,04
16 AT 5 25	2F	Al	16	24,20	32	18	30	36		205	0,05
18 AT 5 25	2F	Al	18	27,40	32	20	30	36		205	0,06
19 AT 5 25	2F	Al	19	29,00	36	22	30	36		206	0,07
20 AT 5 25	2F	Al	20	30,60	36	23	30	36		206	0,08
22 AT 5 25	2F	Al	22	33,85	38	24	30	36		207	0,08
24 AT 5 25	2F	Al	24	37,00	42	26	30	36	8	208	0,11
25 AT 5 25	2F	Al	25	38,55	44	26	30	36	8	209	0,12
26 AT 5 25	2F	Al	26	40,20	44	26	30	36	8	209	0,12
27 AT 5 25	2F	Al	27	41,80	48	30	30	36	8	210	0,13
28 AT 5 25	2F	Al	28	43,35	48	32	30	36	8	210	0,14
30 AT 5 25	2F	Al	30	46,55	51	34	30	36	8	211	0,15
32 AT 5 25	2F	Al	32	49,70	54	38	30	36	8	212	0,18
36 AT 5 25	2F	Al	36	56,05	63	38	30	36	8	215	0,23
40 AT 5 25	2F	Al	40	62,45	66	40	30	36	8	216	0,28
42 AT 5 25	2F	Al	42	65,60	71	40	30	36	8	217	0,29
44 AT 5 25	2	Al	44	68,80		45	30	36	8		0,31
48 AT 5 25	2	Al	48	75,15		50	30	36	8		0,40
60 AT 5 25	2	Al	60	94,25		65	30	36	8		0,61


AT 10

Passo 10 mm

Per cinghie AT larghezza 16 mm

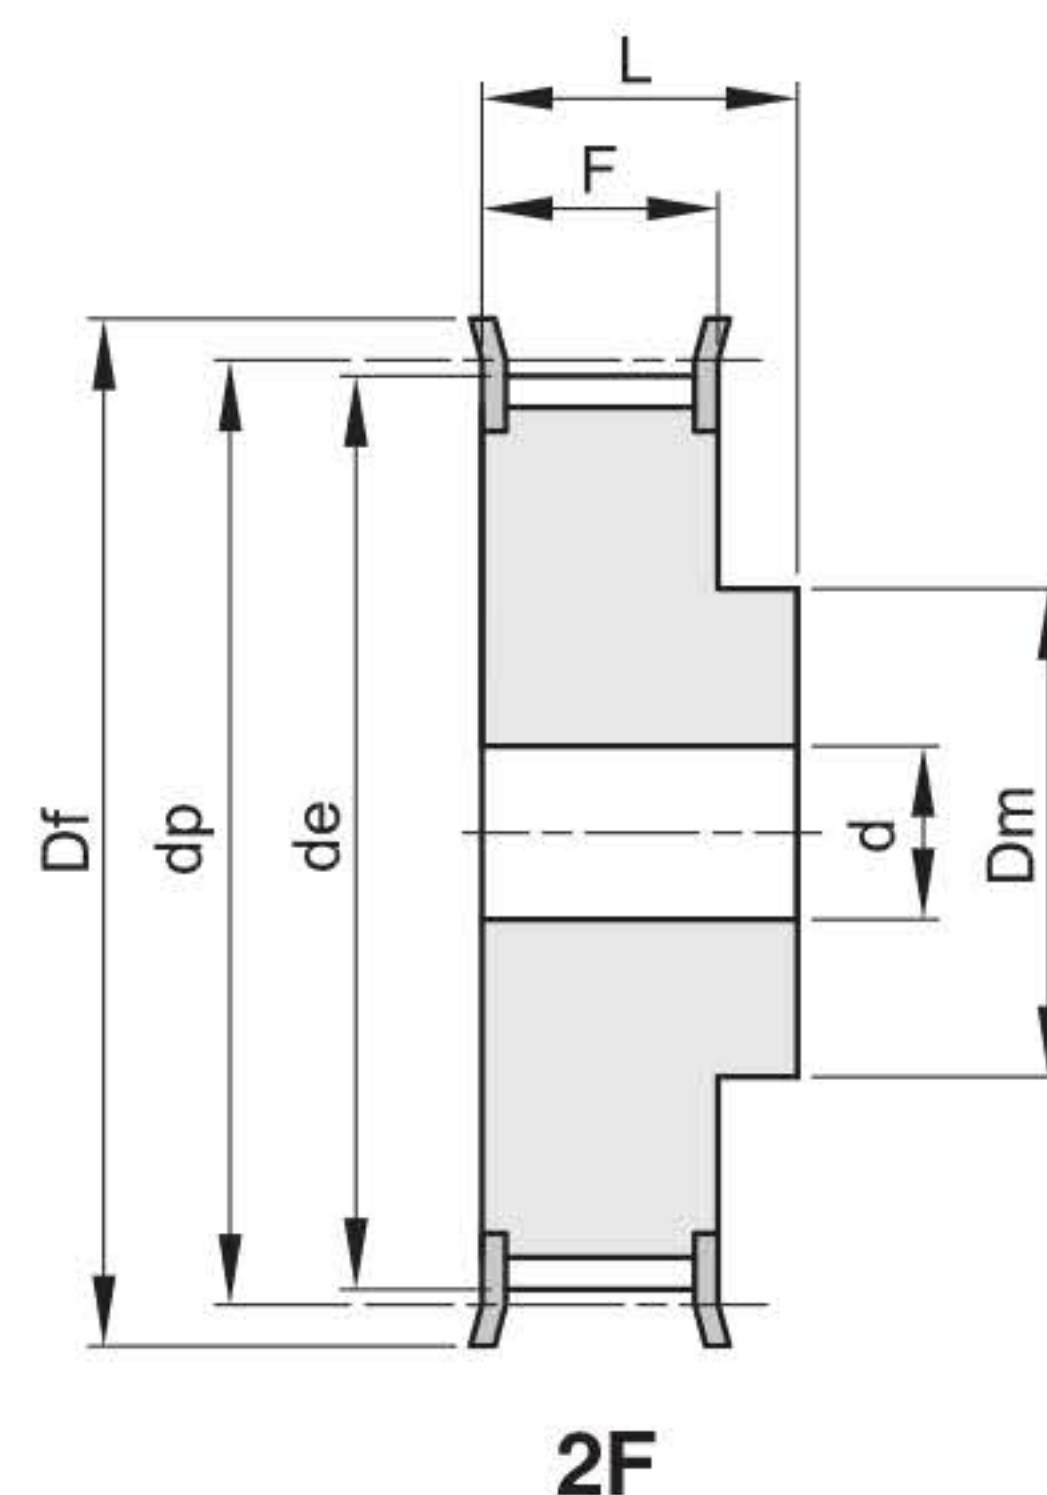

2F

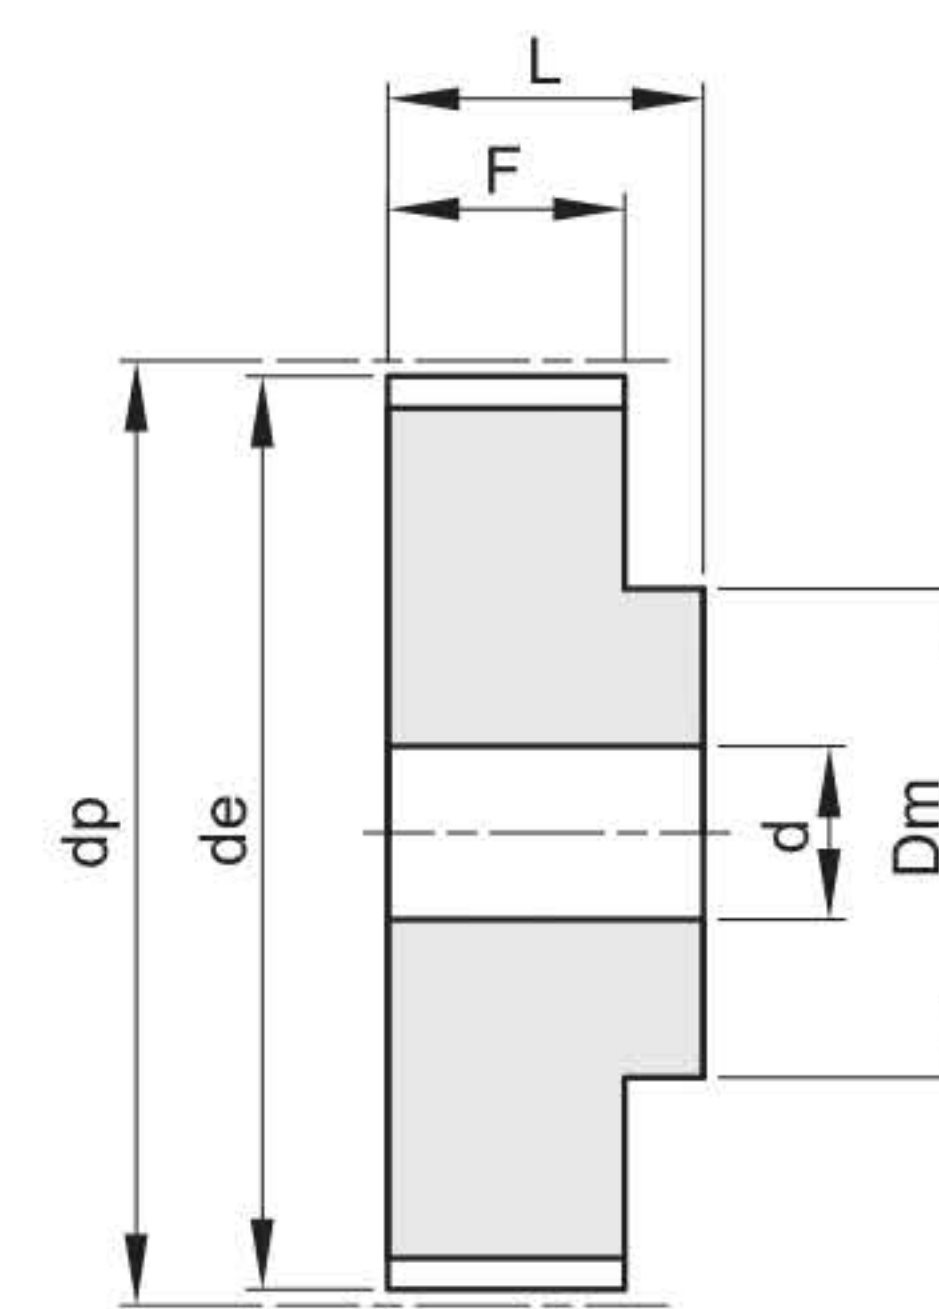



2

codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
15 AT 10 16	2F	Al	15	45,90	51	32	21	31	8	211	0,12
16 AT 10 16	2F	Al	16	49,10	54	35	21	31	8	212	0,13
18 AT 10 16	2F	Al	18	55,45	60	40	21	31	8	214	0,17
19 AT 10 16	2F	Al	19	58,65	66	44	21	31	8	216	0,18
20 AT 10 16	2F	Al	20	61,80	66	46	21	31	8	216	0,21
22 AT 10 16	2F	Al	22	68,20	75	52	21	31	8	218	0,25
24 AT 10 16	2F	Al	24	74,55	83	58	21	31	8	219	0,29
25 AT 10 16	2F	Al	25	77,75	83	60	21	31	8	219	0,31
26 AT 10 16	2F	Al	26	80,90	87	60	21	31	8	220	0,36
27 AT 10 16	2F	Al	27	84,05	91	60	21	31	8	221	0,37
28 AT 10 16	2F	Al	28	87,25	93	60	21	31	8	222	0,40
30 AT 10 16	2F	Al	30	93,65	97	60	21	31	8	223	0,44
32 AT 10 16	2F	Al	32	100,00	106	65	21	31	10	224	0,49
36 AT 10 16	2F	Al	36	112,75	119	70	21	31	10	225	0,62
40 AT 10 16	2F	Al	40	125,45	131	80	21	31	10	226	0,77
44 AT 10 16	2	Al	44	138,20		88	21	31	10		1,00
48 AT 10 16	2	Al	48	150,95		95	21	31	16		1,10
60 AT 10 16	2	Al	60	189,15		110	21	31	16		1,70

AT 10

Passo 10 mm

Per cinghie AT larghezza 25 mm

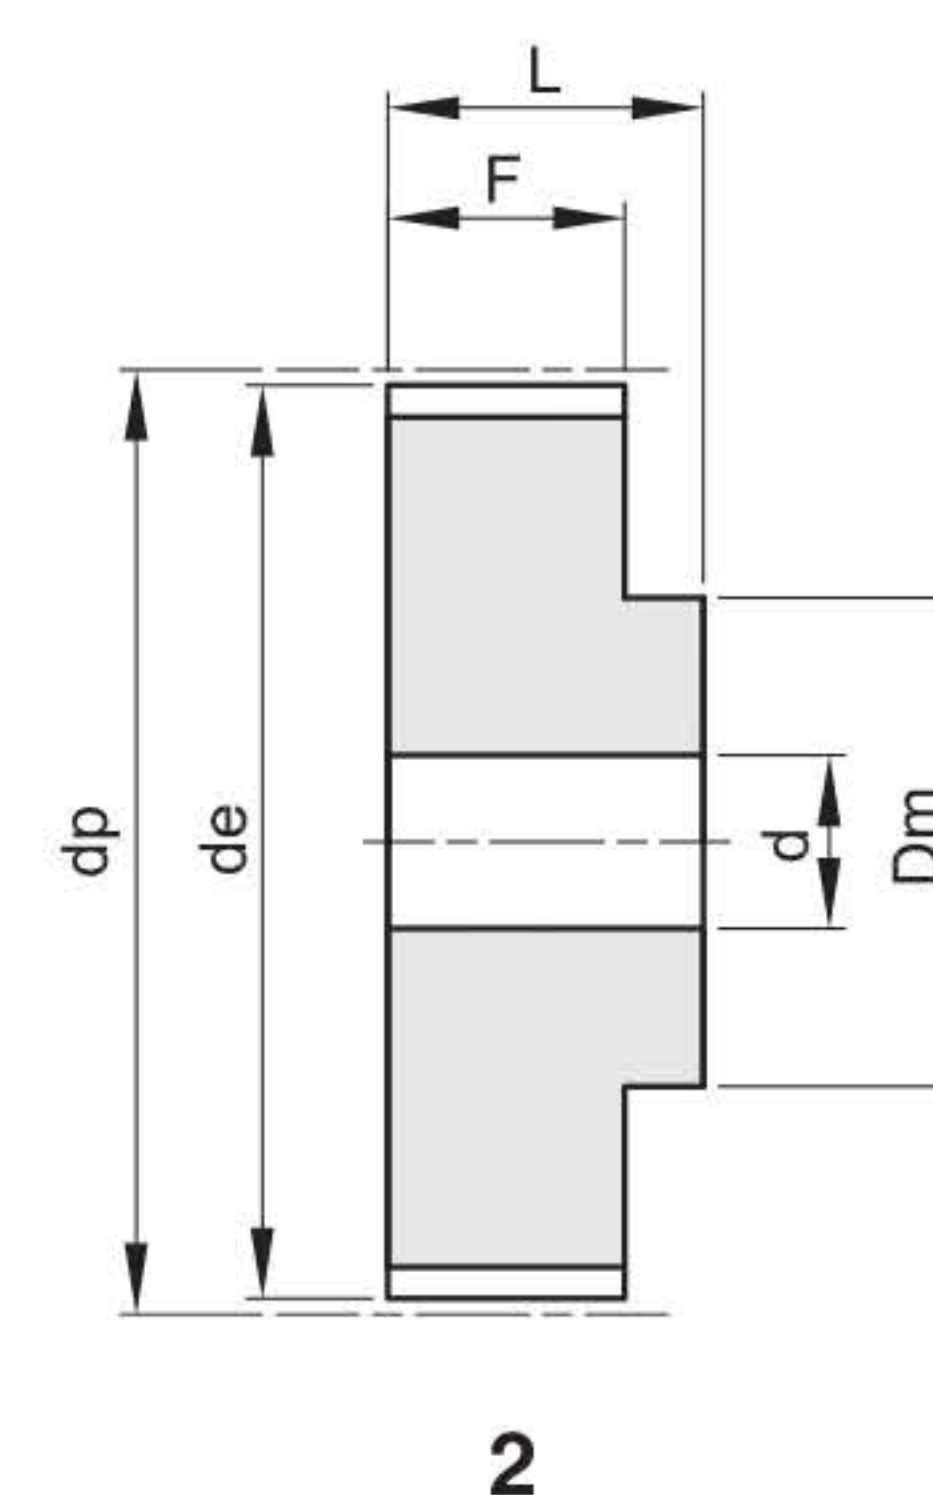
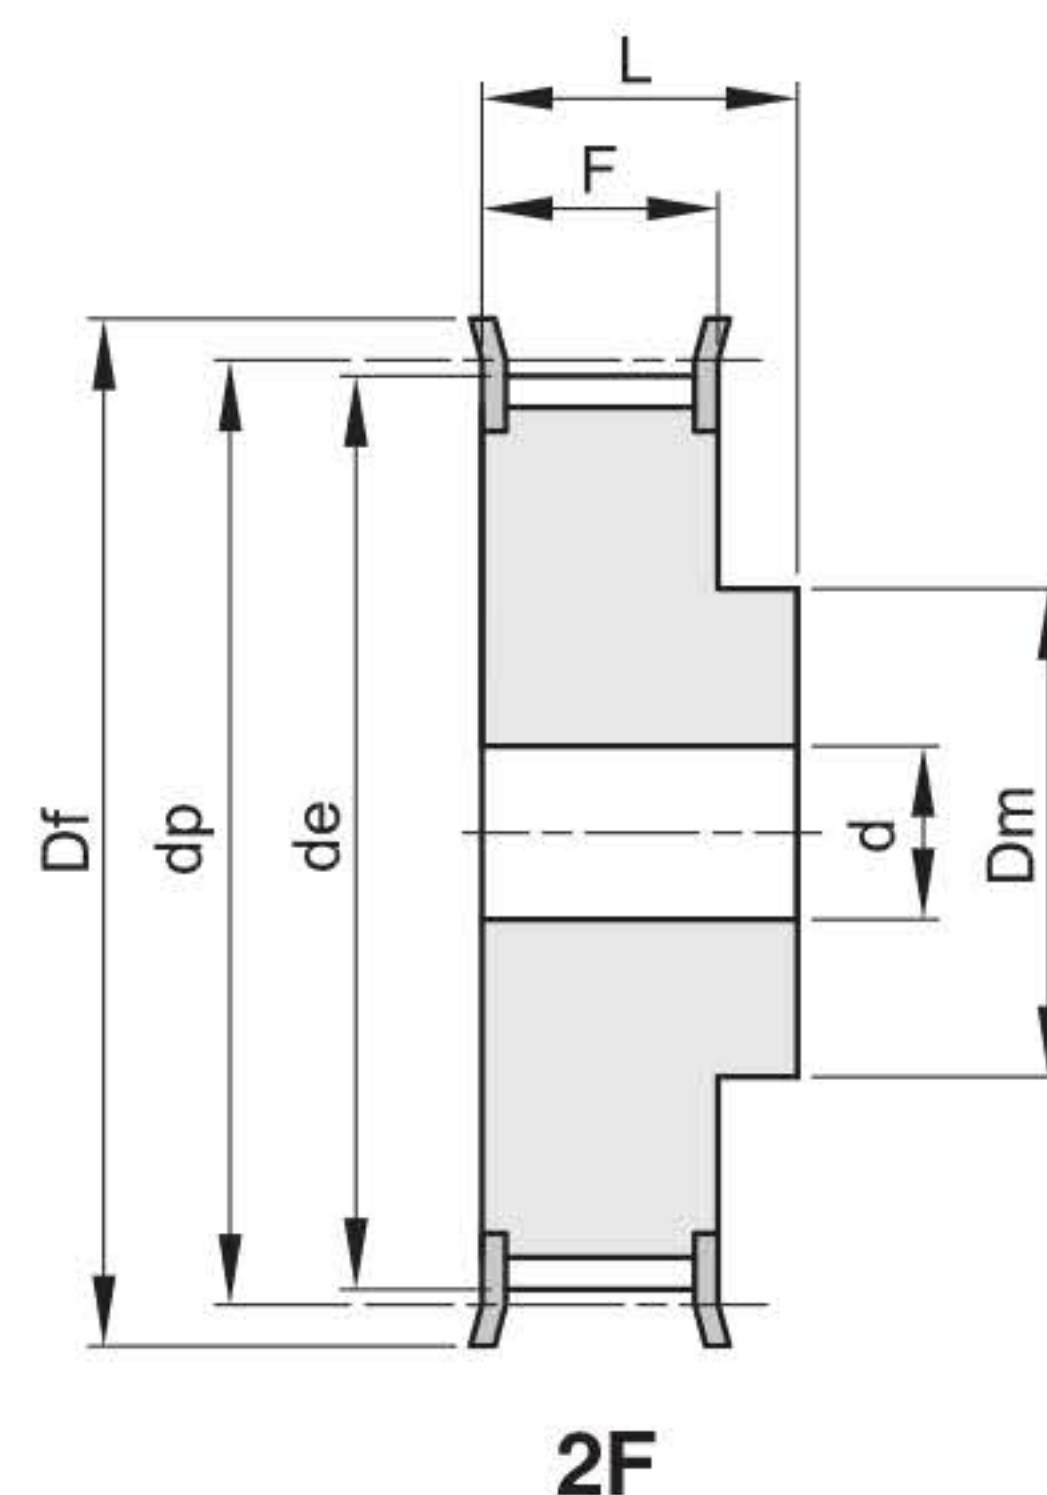


codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
15 AT 10 25	2F	Al	15	45,90	51	32	30	40	8	211	0,15
16 AT 10 25	2F	Al	16	49,10	54	35	30	40	8	212	0,18
18 AT 10 25	2F	Al	18	55,45	60	40	30	40	8	214	0,22
19 AT 10 25	2F	Al	19	58,65	66	44	30	40	8	216	0,25
20 AT 10 25	2F	Al	20	61,80	66	46	30	40	8	216	0,28
22 AT 10 25	2F	Al	22	68,20	75	52	30	40	8	218	0,34
24 AT 10 25	2F	Al	24	74,55	83	58	30	40	8	219	0,39
25 AT 10 25	2F	Al	25	77,75	83	60	30	40	8	219	0,42
26 AT 10 25	2F	Al	26	80,90	87	60	30	40	8	220	0,48
27 AT 10 25	2F	Al	27	84,05	91	60	30	40	8	221	0,54
28 AT 10 25	2F	Al	28	87,25	93	60	30	40	8	222	0,55
30 AT 10 25	2F	Al	30	93,65	97	60	30	40	8	223	0,64
32 AT 10 25	2F	Al	32	100,00	106	65	30	40	10	224	0,69
36 AT 10 25	2F	Al	36	112,75	119	70	30	40	10	225	0,87
40 AT 10 25	2F	Al	40	125,45	131	80	30	40	10	226	1,07
44 AT 10 25	2	Al	44	138,20		88	30	40	10		1,35
48 AT 10 25	2	Al	48	150,95		95	30	40	16		1,52
60 AT 10 25	2	Al	60	189,15		110	30	40	16		2,34

AT 10

Passo 10 mm

Per cinghie AT larghezza 32 mm

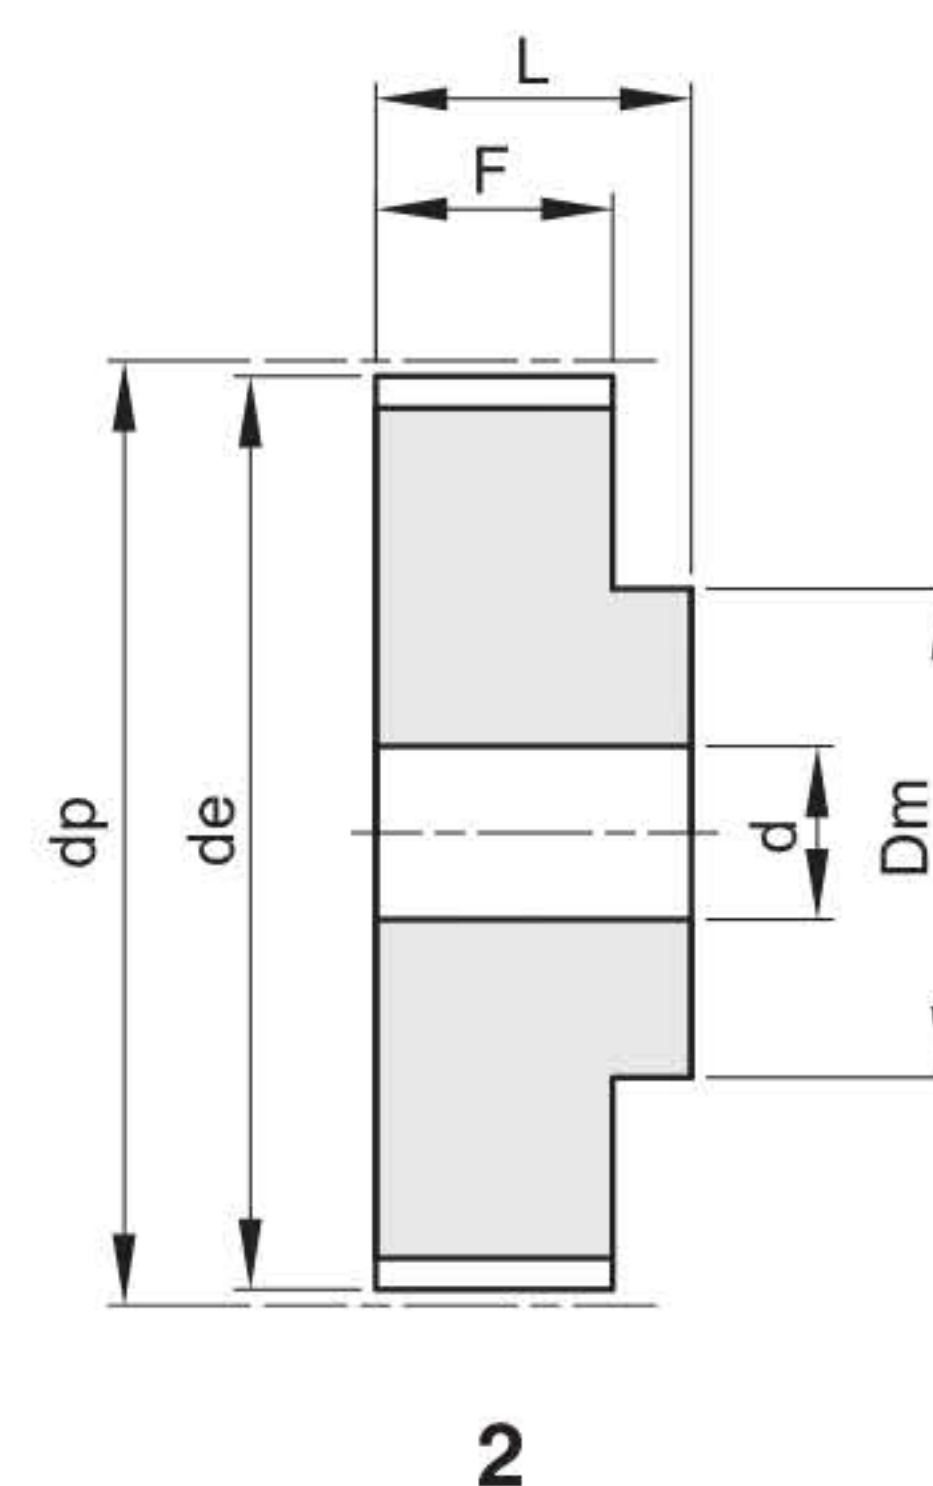
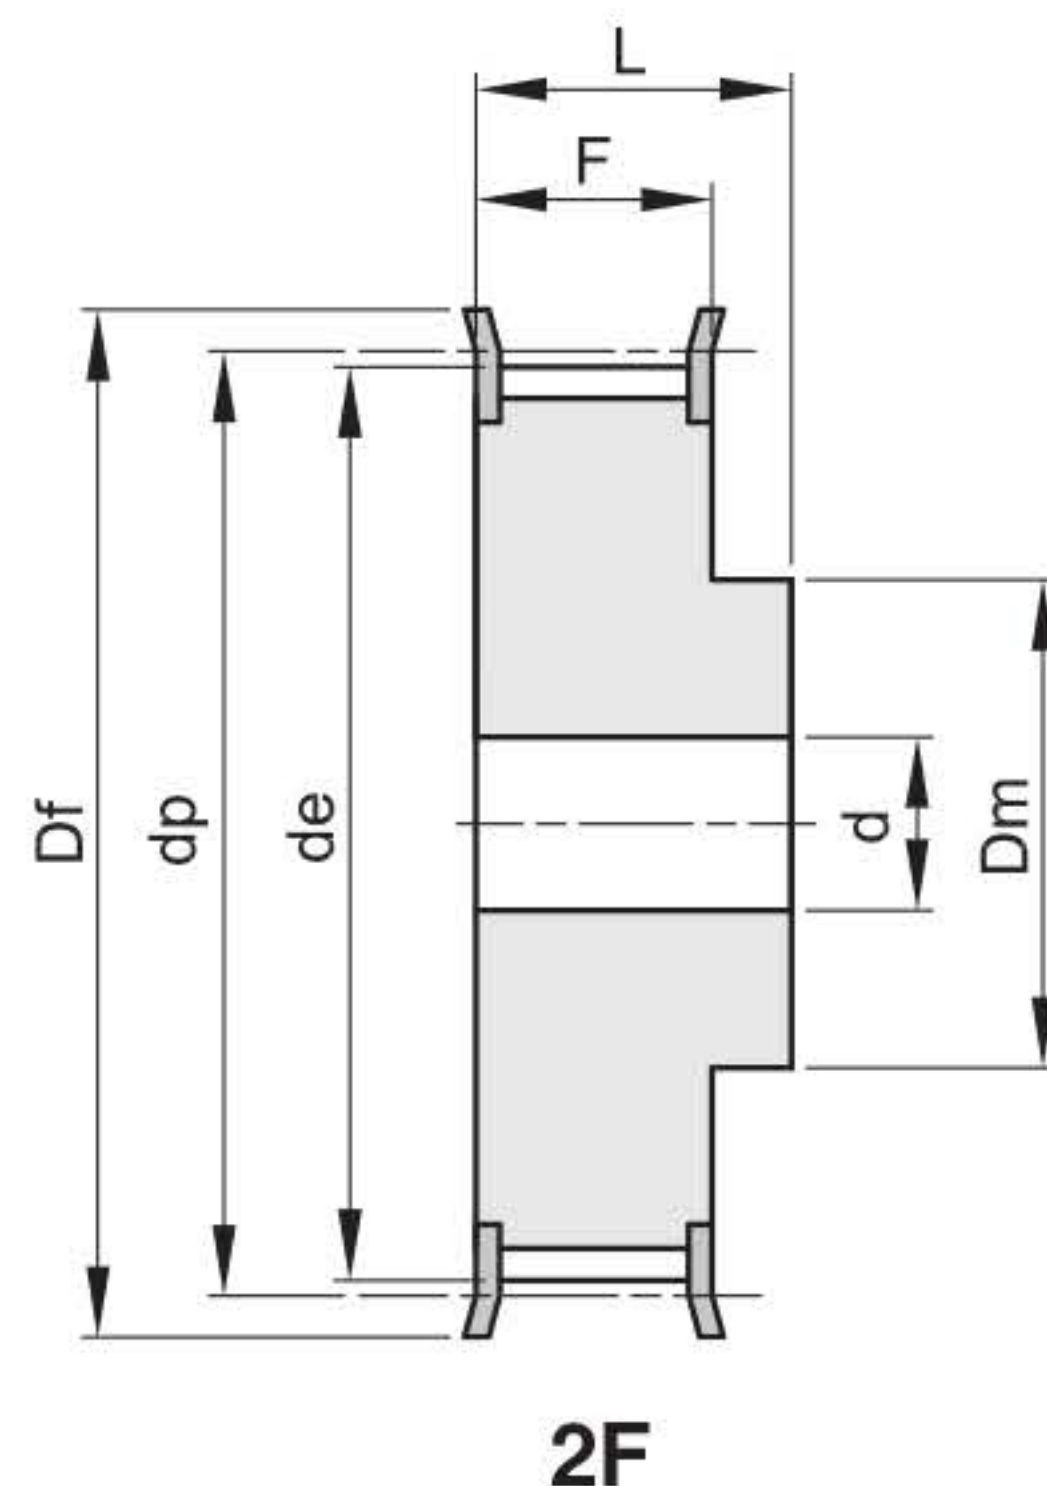


codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
18 AT 10 32	2F	Al	18	55,45	60	40	37	47	10	214	0,25
19 AT 10 32	2F	Al	19	58,65	66	44	37	47	10	216	0,29
20 AT 10 32	2F	Al	20	61,80	66	46	37	47	12	216	0,32
22 AT 10 32	2F	Al	22	68,20	75	52	37	47	12	218	0,39
24 AT 10 32	2F	Al	24	74,55	83	58	37	47	12	219	0,47
25 AT 10 32	2F	Al	25	77,75	83	60	37	47	12	219	0,53
26 AT 10 32	2F	Al	26	80,90	87	60	37	47	12	220	0,56
27 AT 10 32	2F	Al	27	84,05	91	60	37	47	12	221	0,60
28 AT 10 32	2F	Al	28	87,25	93	60	37	47	12	222	0,64
30 AT 10 32	2F	Al	30	93,65	97	60	37	47	12	223	0,74
32 AT 10 32	2F	Al	32	100,00	106	65	37	47	12	224	0,84
36 AT 10 32	2F	Al	36	112,75	119	70	37	47	16	225	1,06
40 AT 10 32	2F	Al	40	125,45	131	80	37	47	16	226	1,32
44 AT 10 32	2	Al	44	138,20		88	37	47	16		1,61
48 AT 10 32	2	Al	48	150,95		95	37	47	16		1,93
60 AT 10 32	2	Al	60	189,15		110	37	47	16		3,00

AT 10


Passo 10 mm

Per cinghie AT larghezza 50 mm

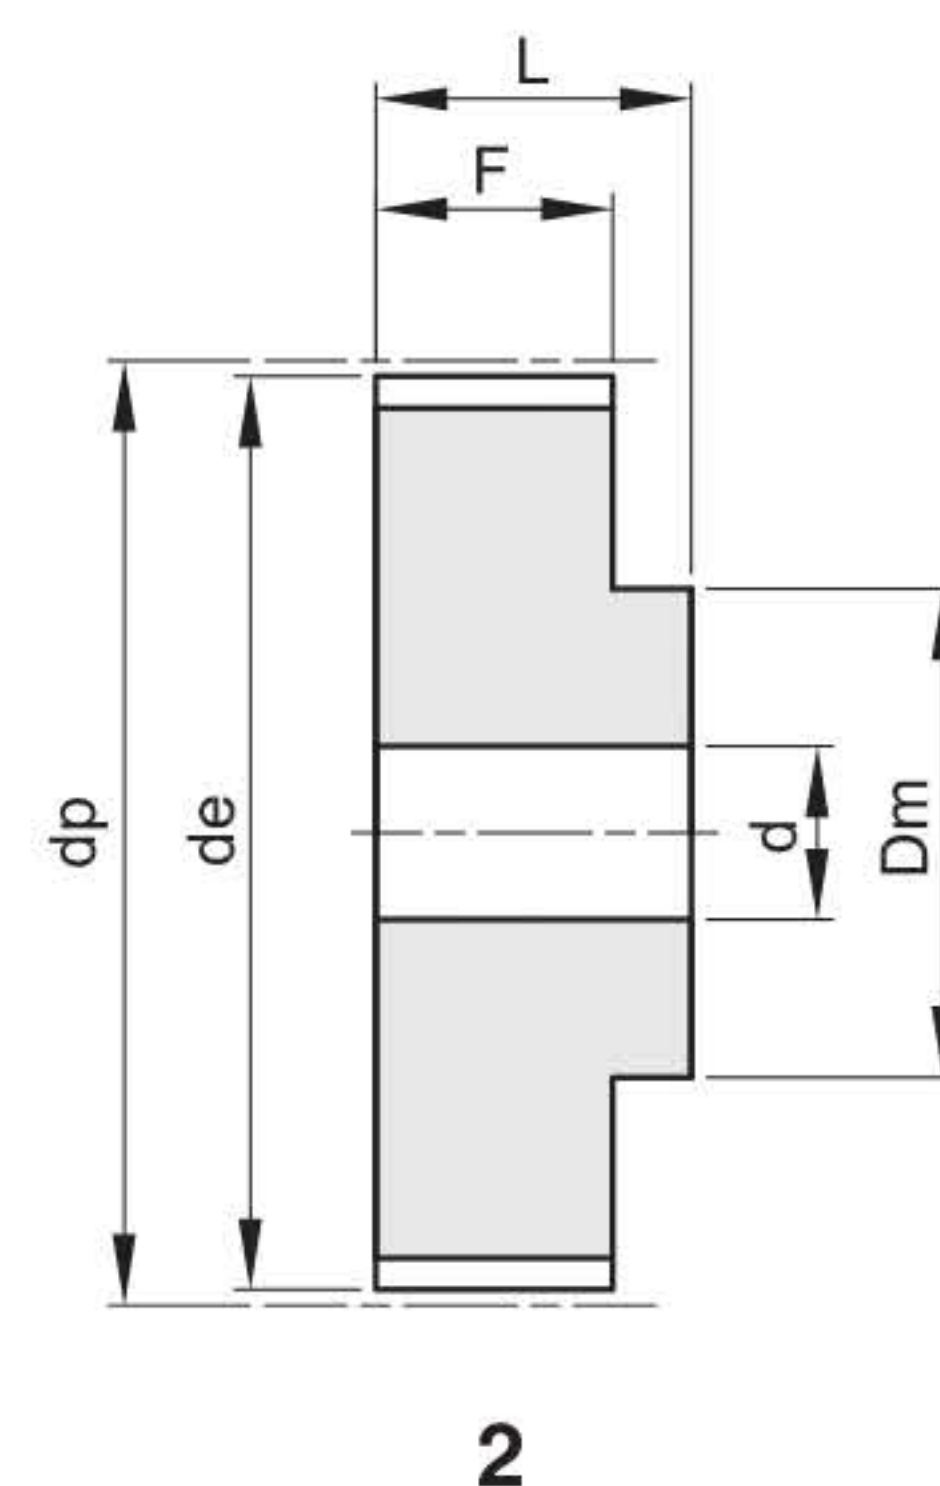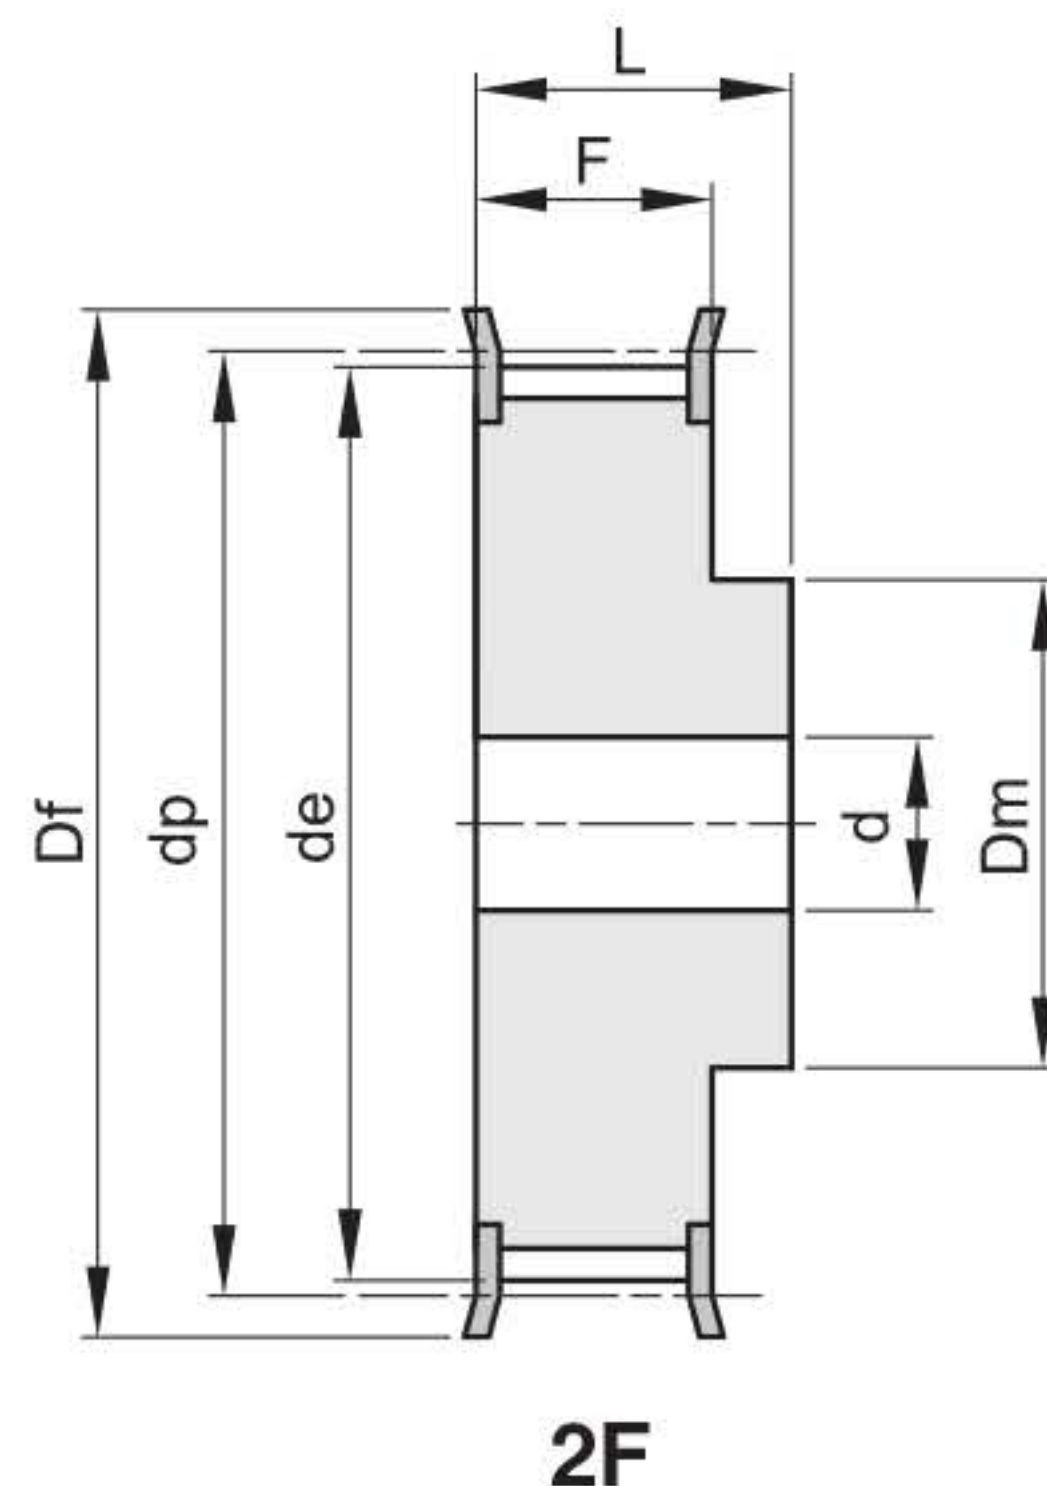


codice	tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
18 AT 10 50	2F	Al	18	55,45	60	40	56	66	10	214	0,42
19 AT 10 50	2F	Al	19	58,65	66	44	56	66	10	216	0,47
20 AT 10 50	2F	Al	20	61,80	66	46	56	66	12	216	0,52
22 AT 10 50	2F	Al	22	68,20	75	52	56	66	12	218	0,57
24 AT 10 50	2F	Al	24	74,55	83	58	56	66	12	219	0,74
25 AT 10 50	2F	Al	25	77,75	83	60	56	66	12	219	0,77
26 AT 10 50	2F	Al	26	80,90	87	60	56	66	12	220	0,82
27 AT 10 50	2F	Al	27	84,05	91	60	56	66	12	221	0,95
28 AT 10 50	2F	Al	28	87,25	93	60	56	66	12	222	0,96
30 AT 10 50	2F	Al	30	93,65	97	60	56	66	12	223	1,17
32 AT 10 50	2F	Al	32	100,00	106	65	56	66	12	224	1,30
36 AT 10 50	2F	Al	36	112,75	119	70	56	66	16	225	1,64
40 AT 10 50	2F	Al	40	125,45	131	80	56	66	16	226	2,00
44 AT 10 50	2	Al	44	138,20		88	56	66	16		2,36
48 AT 10 50	2	Al	48	150,95		95	56	66	16		2,83
60 AT 10 50	2	Al	60	189,15		110	56	66	16		4,37


SPZ - 1

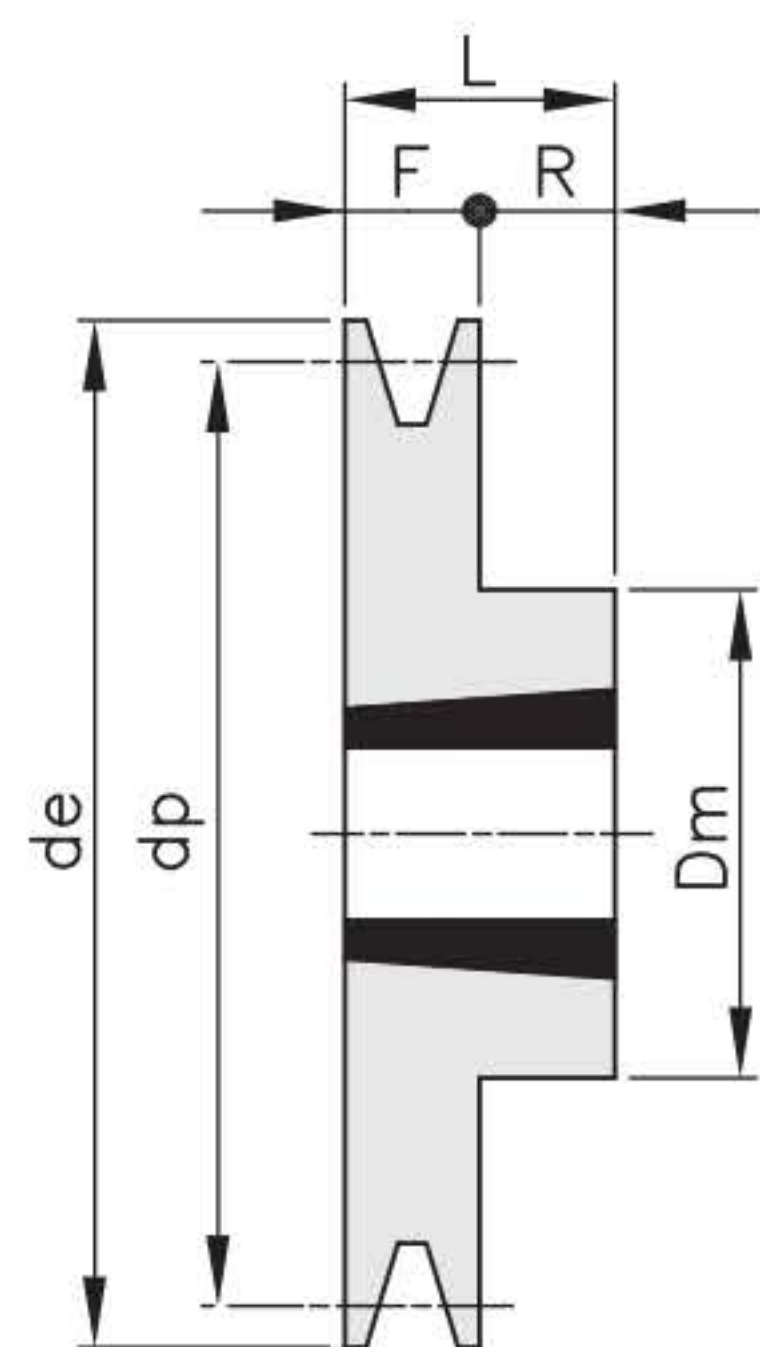

1

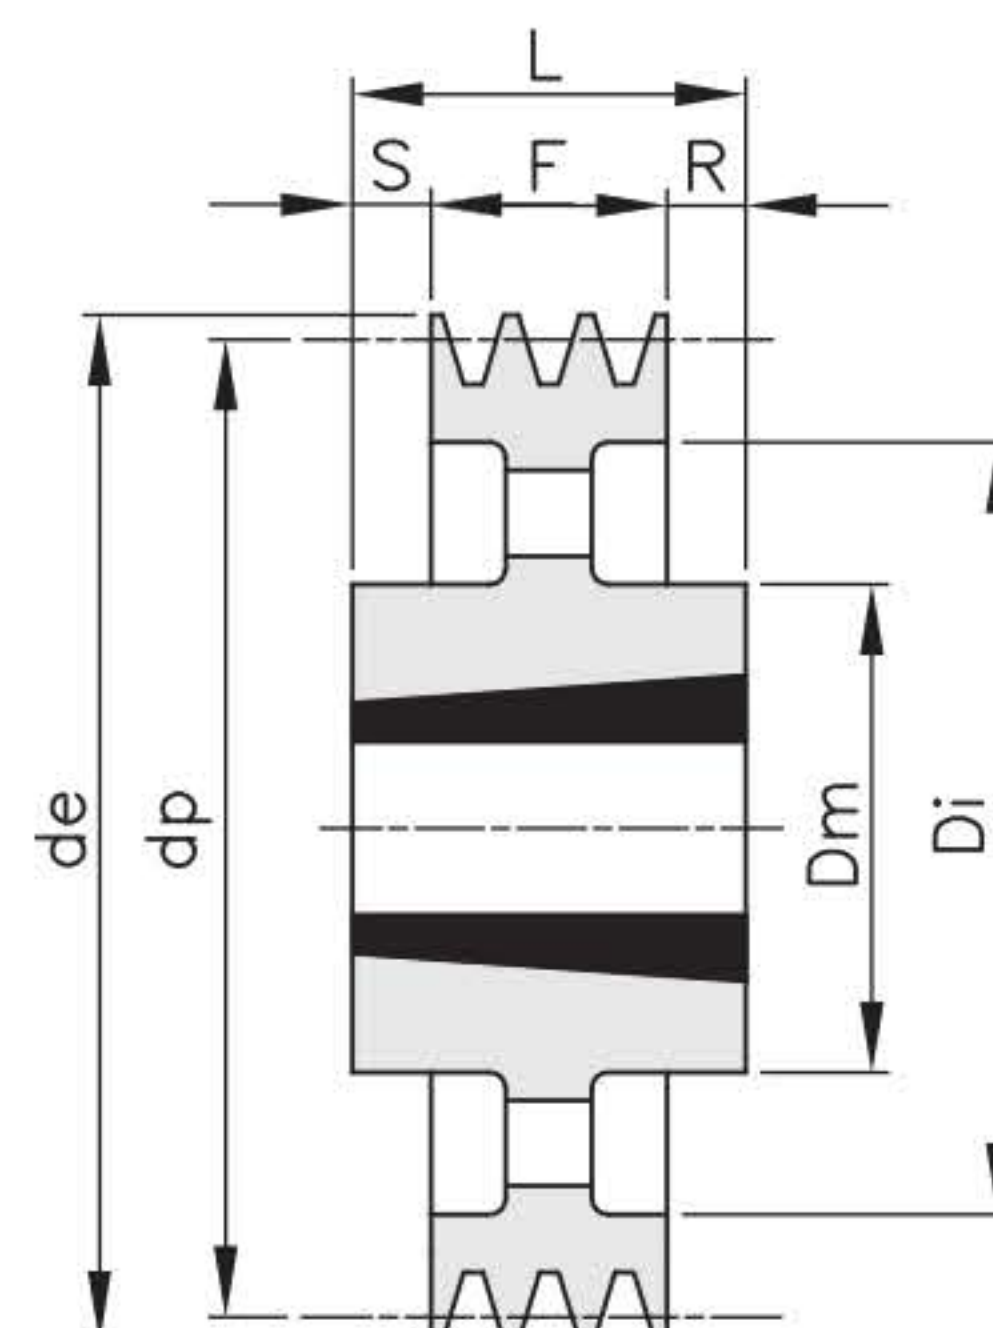


4

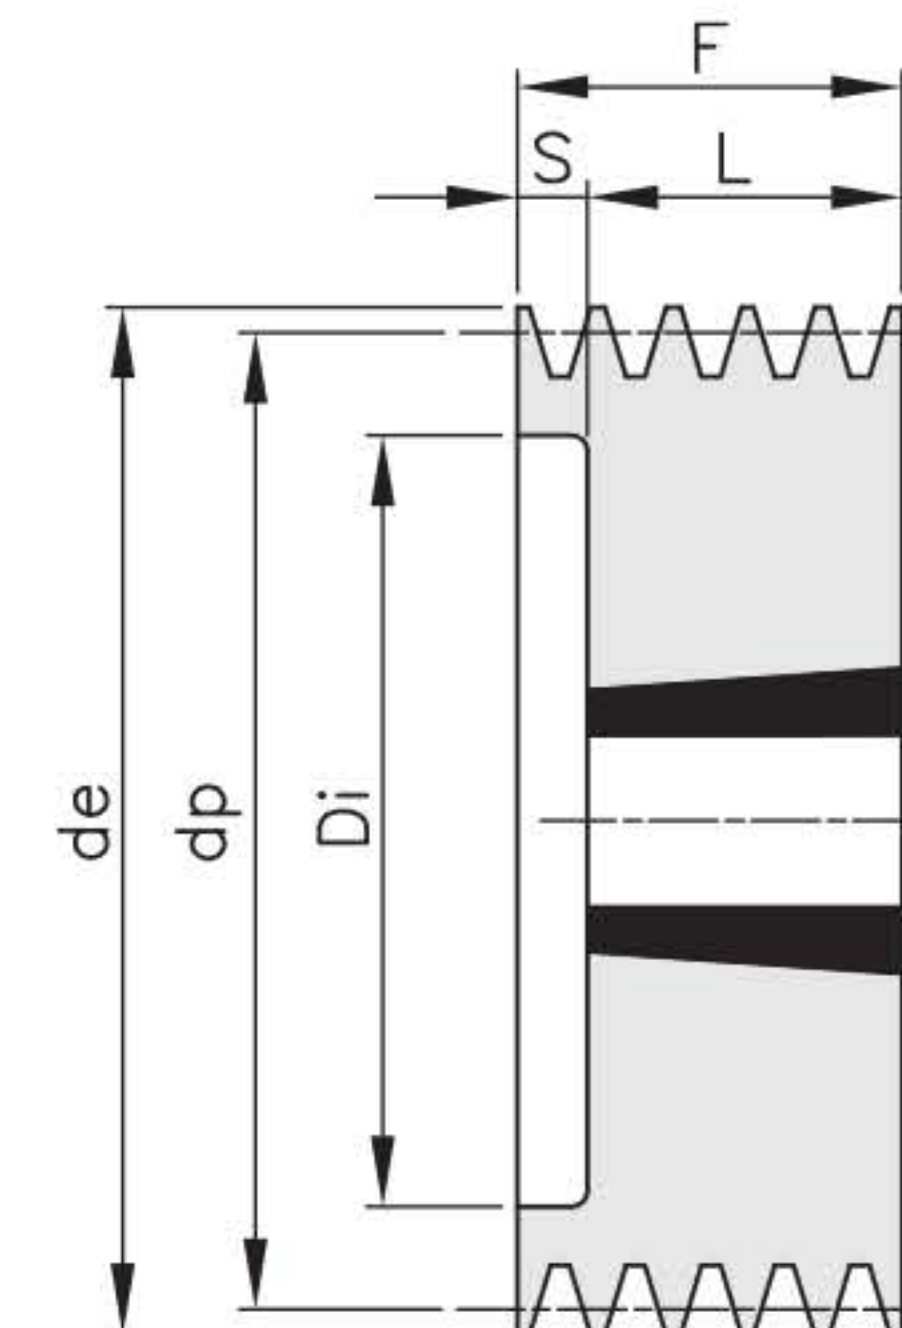


8

codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
* 50 01 SPZ	1	50	54	8	1008	25		26		37	25		12	0,40
* 56 01 SPZ	1	56	60	8	1008	25		32		37	25		12	0,50
* 60 01 SPZ	1	60	64	1	1008	25				22	22			0,50
63 01 SPZ	1	63	67	1	1108	28	56			16	22	6		0,40
67 01 SPZ	1	67	71	1	1108	28	60			16	22	6		0,50
71 01 SPZ	1	71	75	1	1108	28	60			16	22	6		0,50
75 01 SPZ	1	75	79	1	1108	28	60			16	22	6		0,60
80 01 SPZ	1	80	84	1	1210	32	75			16	25	9		0,60
85 01 SPZ	1	85	89	1	1210	32	80			16	25	9		0,80
90 01 SPZ	1	90	94	1	1210	32	80			16	25	9		0,80
95 01 SPZ	1	95	99	1	1210	32	85			16	25	9		0,90
100 01 SPZ	1	100	104	1	1210	32	85			16	25	9		0,90
106 01 SPZ	1	106	110	1	1610	42	92			16	25	9		1,00
112 01 SPZ	1	112	116	1	1610	42	92			16	25	9		1,10
118 01 SPZ	1	118	122	1	1610	42	92			16	25	9		1,30
125 01 SPZ	1	125	129	1	1610	42	92			16	25	9		1,40
132 01 SPZ	1	132	136	1	1610	42	92			16	25	9		1,50
140 01 SPZ	1	140	144	1	1610	42	92			16	25	9		1,50
150 01 SPZ	1	150	154	1	1610	42	92			16	25	9		1,60
160 01 SPZ	1	160	164	1	1610	42	92			16	25	9		1,70
170 01 SPZ	1	170	174	1	1610	42	92			16	25	9		1,80
180 01 SPZ	1	180	184	4	1610	42	92	152		16	25	9		2,00
190 01 SPZ	1	190	194	4	1610	42	92	162		16	25	9		2,20
200 01 SPZ	1	200	204	4	2012	50	112	171		16	32	16		2,60
224 01 SPZ	1	224	228	4	2012	50	112	195		16	32	16		2,80
250 01 SPZ	1	250	254	4	2012	50	112	221		16	32	8	8	3,20
280 01 SPZ	1	280	284	4	2012	50	112	251		16	32	8	8	3,50
315 01 SPZ	1	315	319	4	2012	50	112	286		16	32	8	8	3,80
355 01 SPZ	1	355	359	4	2012	50	112	326		16	32	8	8	4,20
400 01 SPZ	1	400	404	4	2012	50	112	371		16	32	8	8	6,00
450 01 SPZ	1	450	454	4	2517	65	124	421		16	45	14,5	14,5	11,00


SPZ - 2

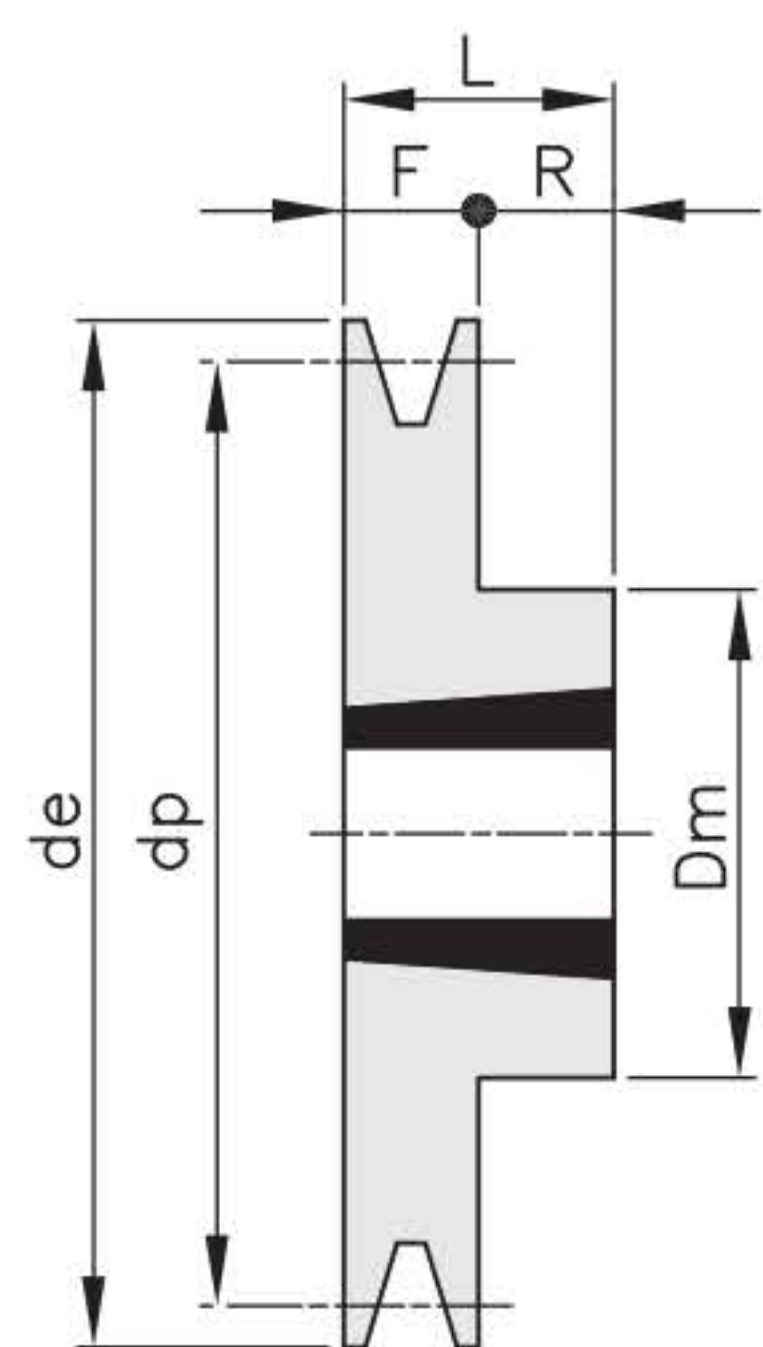


1

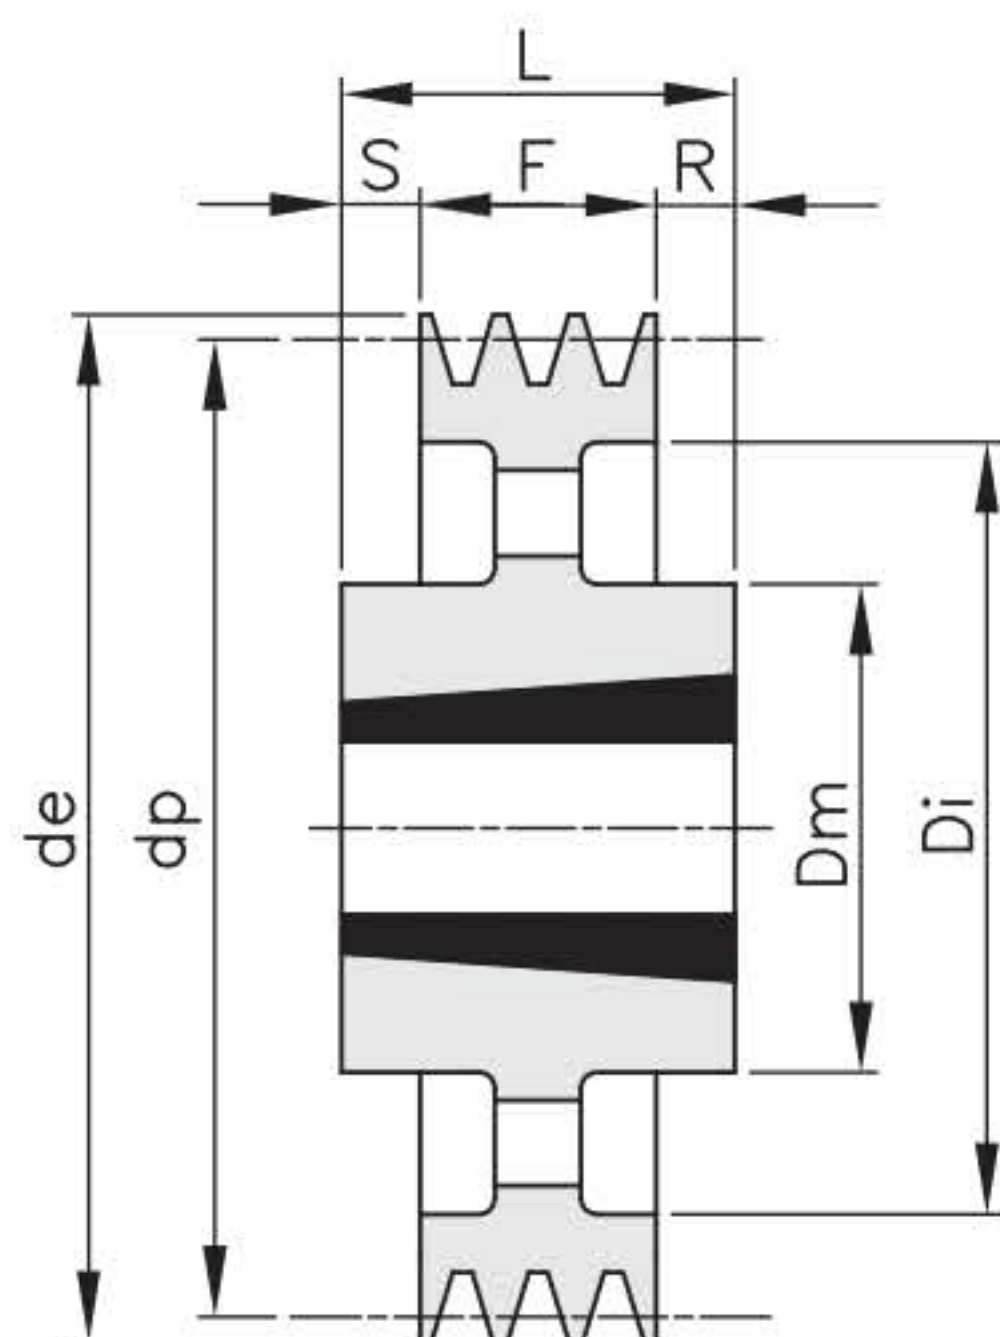

4

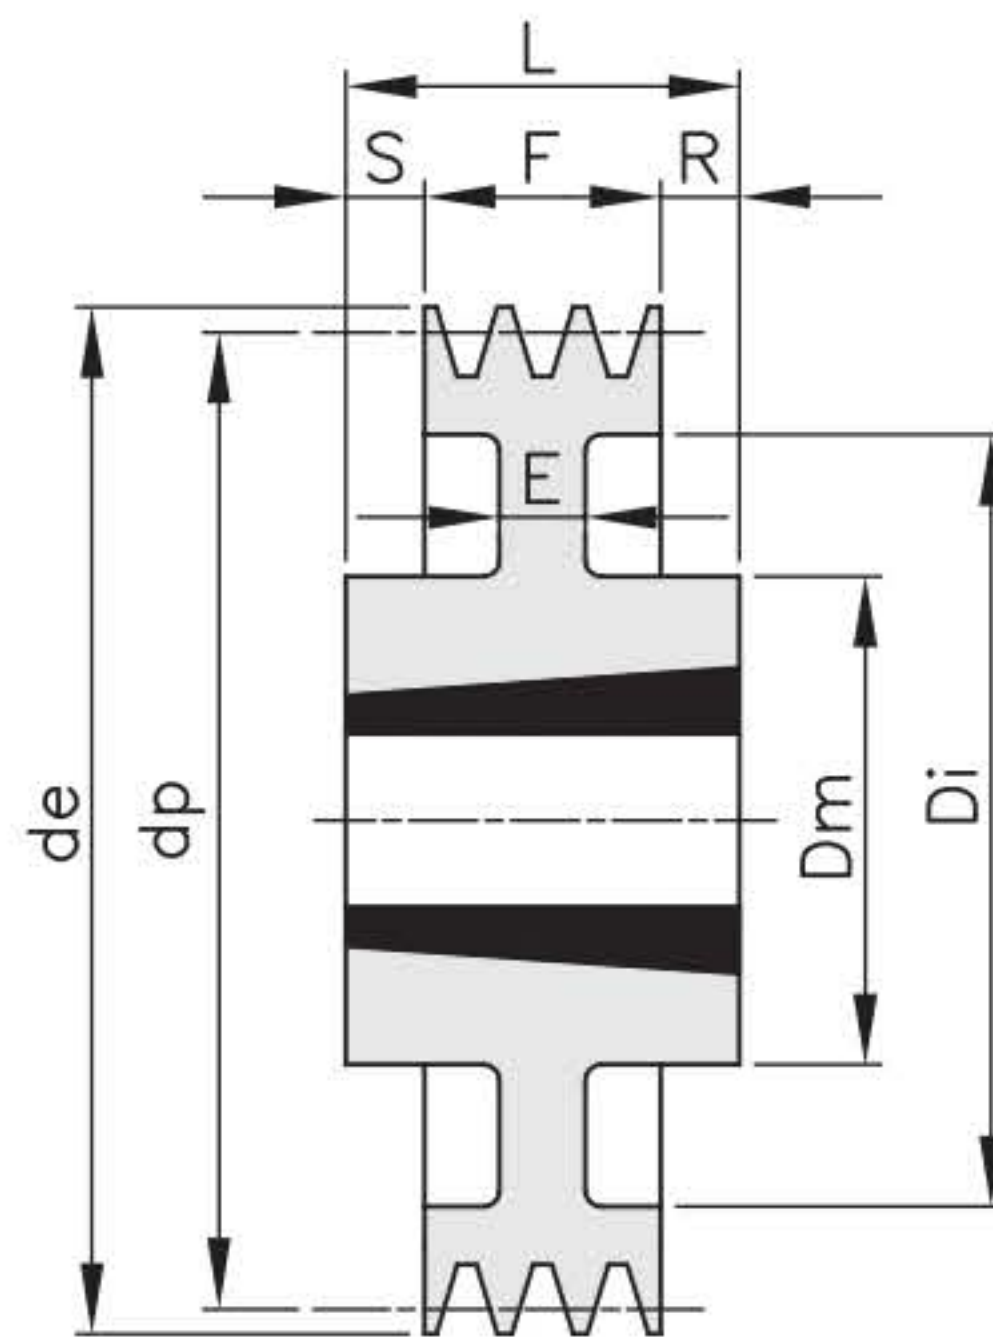


7

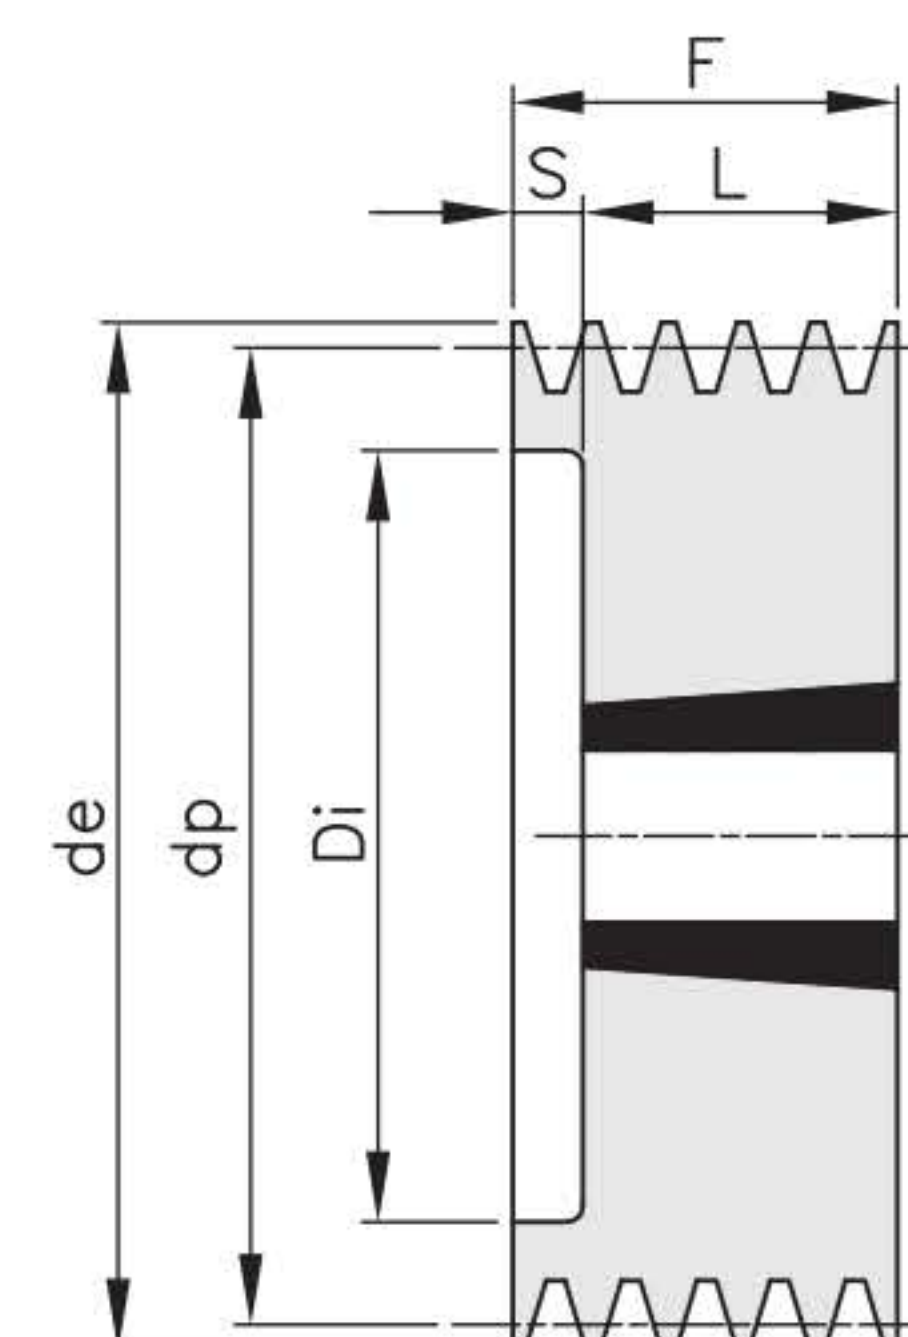

8


codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
* 50 02 SPZ	2	50	54	8	1008	25		26		50	25		25	0,30
* 56 02 SPZ	2	56	60	8	1008	25		32		49	22		27	0,60
60 02 SPZ	2	60	64	8	1108	28		36		49	22		27	0,60
63 02 SPZ	2	63	67	8	1108	28		40		28	22		6	0,50
67 02 SPZ	2	67	71	8	1108	28		42		28	22		6	0,50
71 02 SPZ	2	71	75	8	1108	28		42		28	22		6	0,50
75 02 SPZ	2	75	79	8	1210	32		51		28	25		3	0,60
80 02 SPZ	2	80	84	8	1210	32		51		28	25		3	0,70
85 02 SPZ	2	85	89	8	1610	42		60		28	25		3	0,70
90 02 SPZ	2	90	94	8	1610	42		61		28	25		3	0,80
95 02 SPZ	2	95	99	8	1610	42		66		28	25		3	0,80
100 02 SPZ	2	100	104	8	1610	42		71		28	25		3	1,20
106 02 SPZ	2	106	110	8	1610	42		76		28	25		3	1,20
112 02 SPZ	2	112	116	8	1610	42		83		28	25		3	1,30
118 02 SPZ	2	118	122	8	1610	42		90		28	25		3	1,40
125 02 SPZ	2	125	129	8	1610	42		96		28	25		3	1,70
132 02 SPZ	2	132	136	8	1610	42		103		28	25		3	2,00
140 02 SPZ	2	140	144	8	1610	42		111		28	25		3	2,20
150 02 SPZ	2	150	154	1	2012	50	112			28	32	4		2,30
160 02 SPZ	2	160	164	1	2012	50	112			28	32	4		2,50
170 02 SPZ	2	170	174	1	2012	50	112			28	32	4		2,60
180 02 SPZ	2	180	184	7	2012	50	112	152	10	28	32	4		2,90
190 02 SPZ	2	190	194	7	2012	50	112	162	10	28	32	4		3,30
200 02 SPZ	2	200	204	4	2012	50	112	171		28	32	4		3,50
224 02 SPZ	2	224	228	4	2012	50	112	195		28	32	4		3,70
250 02 SPZ	2	250	254	4	2012	50	112	221		28	32	2	2	3,90
280 02 SPZ	2	280	284	4	2012	50	112	251		28	32	2	2	4,90
315 02 SPZ	2	315	319	4	2012	50	112	286		28	32	2	2	5,80
355 02 SPZ	2	355	359	4	2012	50	112	326		28	32	2	2	6,30
400 02 SPZ	2	400	404	4	2517	65	124	371		28	45	8,5	8,5	7,10
450 02 SPZ	2	450	454	4	2517	65	124	421		28	45	8,5	8,5	9,40
500 02 SPZ	2	500	504	4	2517	65	124	471		28	45	8,5	8,5	10,50

SPZ - 3

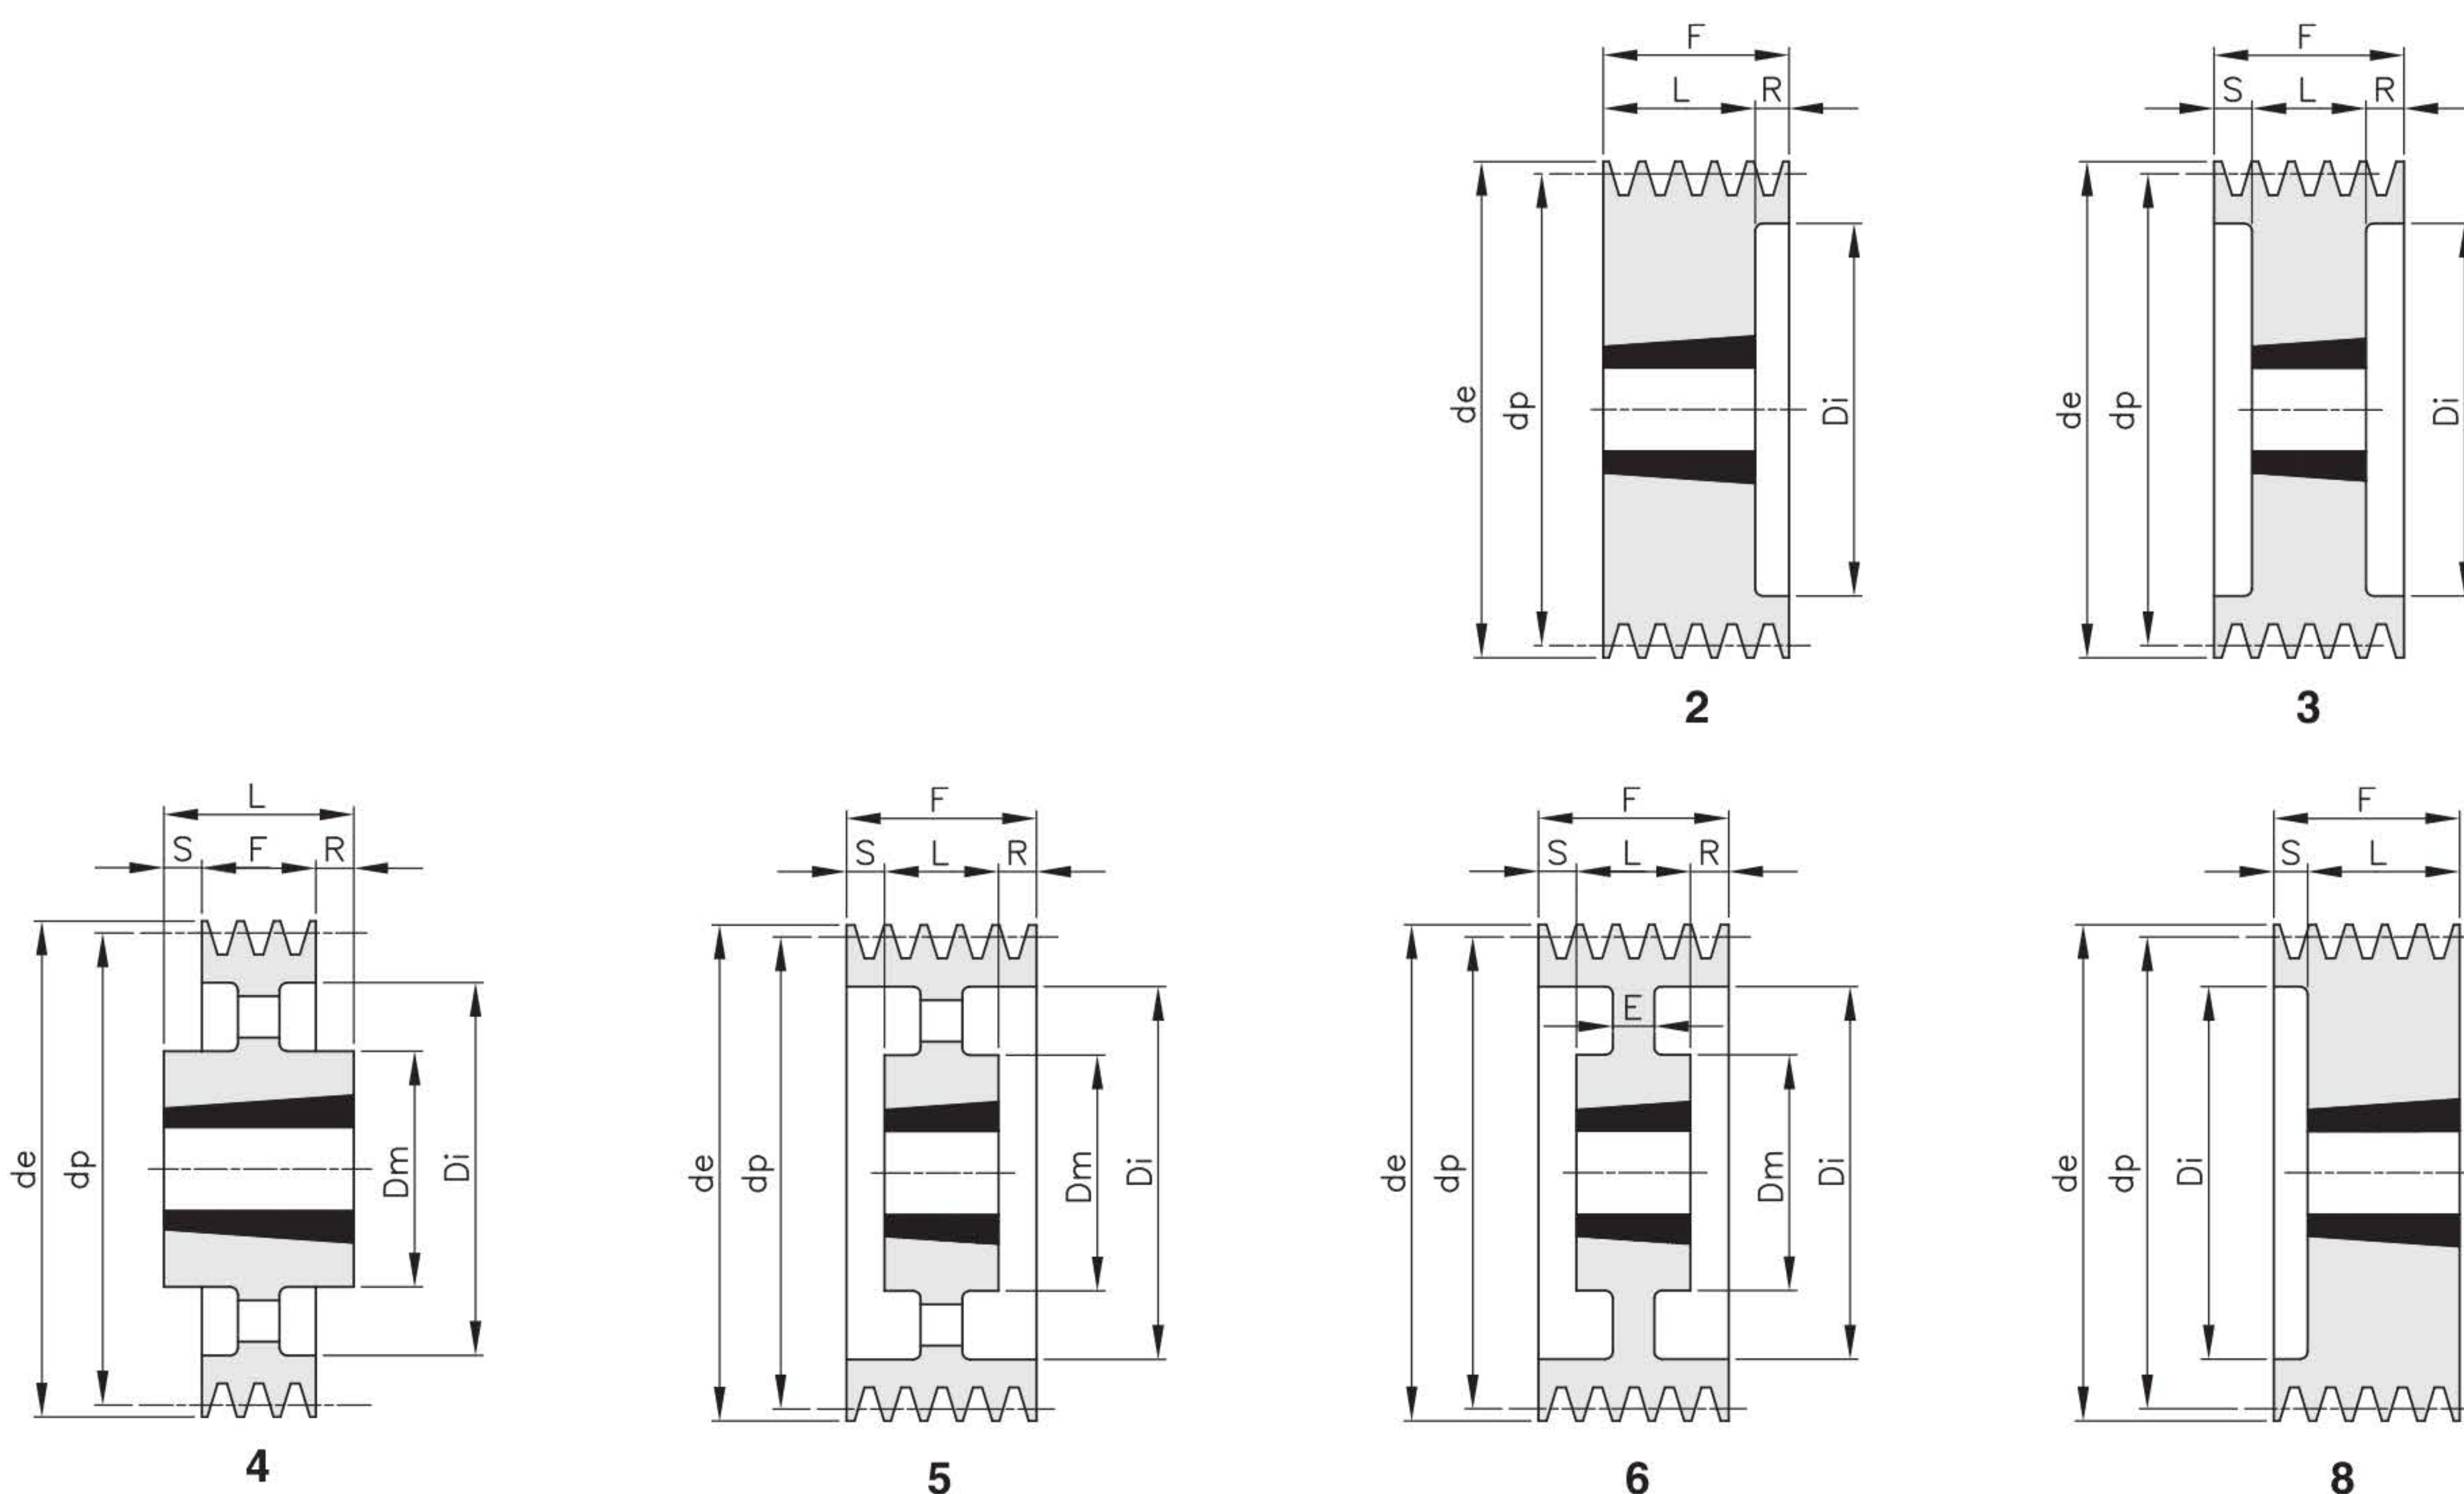


codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
63 03 SPZ	3	63	67	8	1108	28		40		40	22		18	0,50
67 03 SPZ	3	67	71	8	1108	28		42		40	22		18	0,70
71 03 SPZ	3	71	75	8	1108	28		42		40	22		18	0,70
75 03 SPZ	3	75	79	8	1210	32		51		40	25		15	0,80
80 03 SPZ	3	80	84	8	1210	32		51		40	25		15	0,80
85 03 SPZ	3	85	89	8	1610	42		60		40	25		15	0,80
90 03 SPZ	3	90	94	8	1610	42		61		40	25		15	0,90
95 03 SPZ	3	95	99	8	1610	42		66		40	25		15	1,10
100 03 SPZ	3	100	104	8	1610	42		71		40	25		15	1,20
106 03 SPZ	3	106	110	8	1610	42		76		40	25		15	1,40
112 03 SPZ	3	112	116	8	2012	50		83		40	32		8	1,50
118 03 SPZ	3	118	122	8	2012	50		90		40	32		8	1,60
125 03 SPZ	3	125	129	2	2012	50		96		40	32	8		2,00
132 03 SPZ	3	132	136	2	2012	50		103		40	32	8		2,40
140 03 SPZ	3	140	144	2	2010	50		111		40	32	8		2,80
150 03 SPZ	3	150	154	2	2012	50		121		40	32	8		3,40
160 03 SPZ	3	160	164	2	2012	50		131		40	32	8		3,60
170 03 SPZ	3	170	174	3	2012	50		141		40	32	4	4	3,70
180 03 SPZ	3	180	184	6	2012	50	106	151	7	40	32	8		3,70
190 03 SPZ	3	190	194	6	2012	50	112	161	10	40	32	4	4	4,00
200 03 SPZ	3	200	204	5	2012	50	112	171		40	32	4	4	4,30
224 03 SPZ	3	224	228	5	2012	50	112	195		40	32	4	4	4,70
250 03 SPZ	3	250	254	5	2012	50	112	221		40	32	4	4	5,40
280 03 SPZ	3	280	284	4	2517	65	124	251		40	45	2,5	2,5	6,50
315 03 SPZ	3	315	319	4	2517	65	124	286		40	45	2,5	2,5	7,80
355 03 SPZ	3	355	359	4	2517	65	124	326		40	45	2,5	2,5	8,90
400 03 SPZ	3	400	404	4	2517	65	124	371		40	45	2,5	2,5	9,10
450 03 SPZ	3	450	454	4	2517	65	124	421		40	45	2,5	2,5	9,70
500 03 SPZ	3	500	504	4	2517	65	124	471		40	45	2,5	2,5	10,60
630 03 SPZ	3	630	634	4	3020	75	150	601		40	51	5,5	5,5	15,00
800 03 SPZ	3	800	804	4	3020	75	150	771		40	51	5,5	5,5	28,50

SPZ - 4

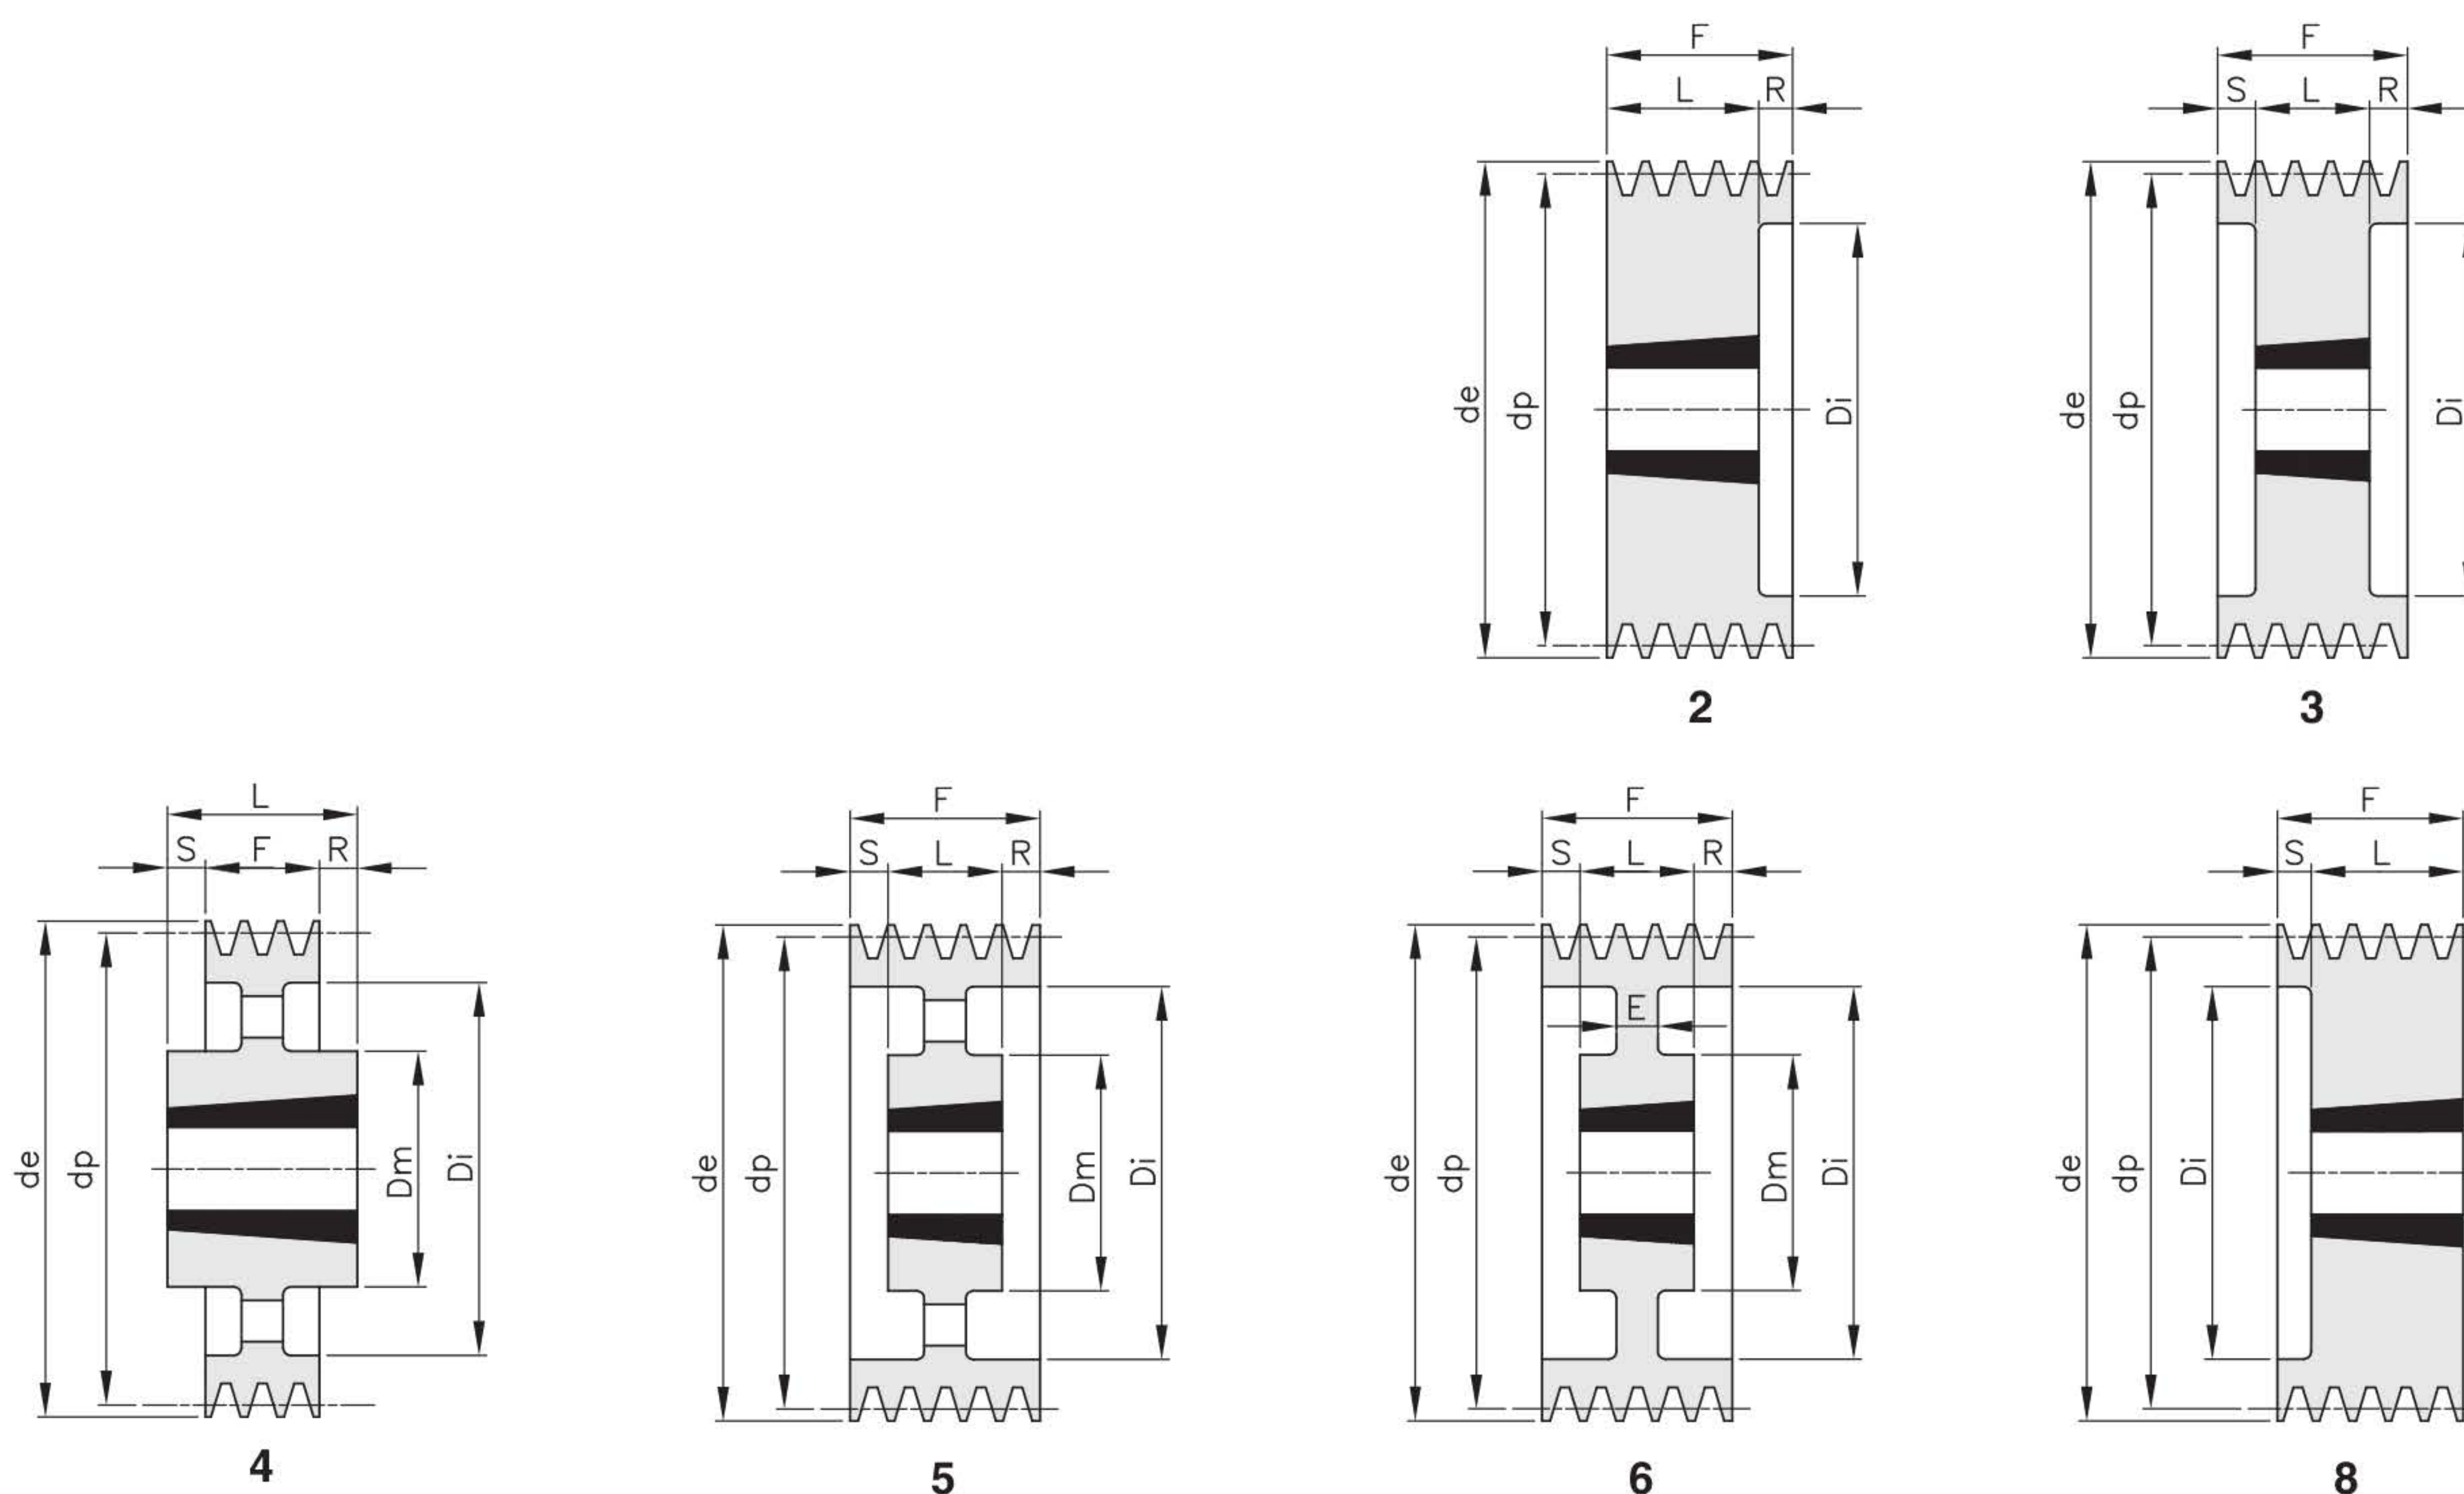


codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
80 04 SPZ	4	80	84	8	1210	32		51		52	25		27	0,90
85 04 SPZ	4	85	89	8	1610	42		60		52	25		27	1,00
90 04 SPZ	4	90	94	8	1610	42		61		52	25		27	1,10
95 04 SPZ	4	95	99	8	1610	42		66		52	25		27	1,20
100 04 SPZ	4	100	104	8	1610	42		71		52	25		27	1,30
106 04 SPZ	4	106	110	8	1610	42		76		52	25		27	1,40
112 04 SPZ	4	112	116	8	2012	50		83		52	32		20	1,60
118 04 SPZ	4	118	122	8	2012	50		90		52	32		20	1,90
125 04 SPZ	4	125	129	2	2012	50		96		52	32	20		2,20
132 04 SPZ	4	132	136	2	2012	50		103		52	32	20		2,60
140 04 SPZ	4	140	144	2	2012	50		111		52	32	20		3,00
150 04 SPZ	4	150	154	2	2517	65		121		52	45	7		3,60
160 04 SPZ	4	160	164	2	2517	65		131		52	45	7		4,50
170 04 SPZ	4	170	174	2	2517	65		141		52	45	7		4,80
180 04 SPZ	4	180	184	2	2517	65		151		52	45	7		5,00
190 04 SPZ	4	190	194	3	2517	65		161		52	45	3,5	3,5	5,10
200 04 SPZ	4	200	204	6	2517	65	124	171	8	52	45	3,5	3,5	5,20
224 04 SPZ	4	224	228	5	2517	65	124	195		52	45	3,5	3,5	5,90
250 04 SPZ	4	250	254	5	2517	65	124	221		52	45	3,5	3,5	6,60
280 04 SPZ	4	280	284	5	2517	65	124	251		52	45	3,5	3,5	7,20
315 04 SPZ	4	315	319	5	2517	65	124	286		52	45	3,5	3,5	8,50
355 04 SPZ	4	355	359	5	2517	65	124	326		52	45	3,5	3,5	9,40
400 04 SPZ	4	400	404	5	2517	65	124	371		52	45	3,5	3,5	11,20
450 04 SPZ	4	450	454	5	3020	75	146	421		52	45	0,5	0,5	11,60
500 04 SPZ	4	500	504	5	3020	75	146	471		52	51	0,5	0,5	12,40
630 04 SPZ	4	630	634	4	3030	75	146	601		52	76	12	12	18,00
800 04 SPZ	4	800	804	4	3030	75	146	771		52	76	12	12	38,00

SPZ - 5

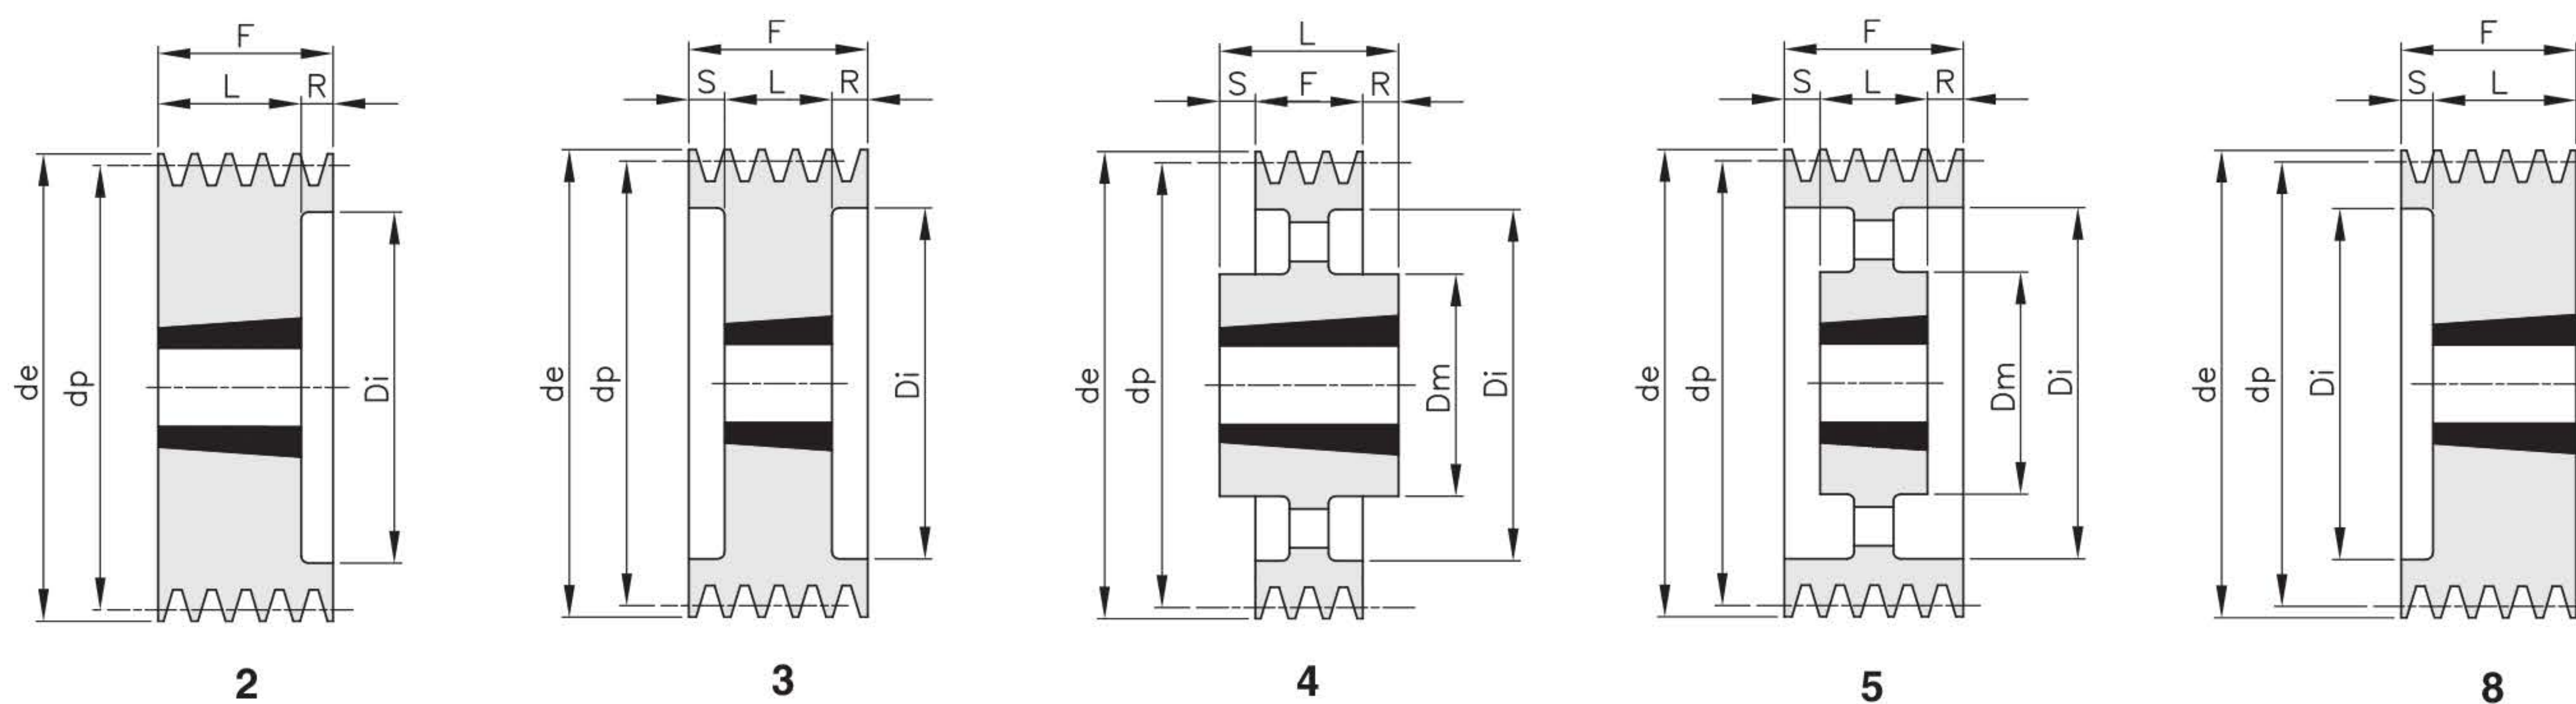


codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
85 05 SPZ	5	85	89	8	1610	42		60		64	25		39	1,20
90 05 SPZ	5	90	94	8	1610	42		61		64	25		39	1,40
95 05 SPZ	5	95	99	8	1610	42		66		64	25		39	1,50
100 05 SPZ	5	100	104	8	2012	50		71		64	32		32	1,60
106 05 SPZ	5	106	110	8	2012	50		76		64	32		32	1,80
112 05 SPZ	5	112	116	8	2012	50		83		64	32		32	1,90
118 05 SPZ	5	118	122	8	2012	50		90		64	32		32	2,40
125 05 SPZ	5	125	129	8	2012	50		96		64	32		32	2,80
132 05 SPZ	5	132	136	8	2517	65		103		64	45		19	2,80
140 05 SPZ	5	140	144	2	2517	65		111		64	45	19		3,20
150 05 SPZ	5	150	154	2	2517	65		121		64	45	19		3,90
160 05 SPZ	5	160	164	2	2517	65		131		64	45	19		4,70
170 05 SPZ	5	170	174	2	2517	65		141		64	45	19		5,50
180 05 SPZ	5	180	184	2	2517	65		151		64	45	19		6,20
190 05 SPZ	5	190	194	3	2517	65		161		64	45	9,5	9,5	6,40
200 05 SPZ	5	200	204	3	2517	65		171		64	45	9,5	9,5	6,50
224 05 SPZ	5	224	228	5	2517	65	124	195		64	45	9,5	9,5	7,20
250 05 SPZ	5	250	254	5	2517	65	124	221		64	45	9,5	9,5	7,60
280 05 SPZ	5	280	284	5	2517	65	124	251		64	45	9,5	9,5	9,00
315 05 SPZ	5	315	319	5	2517	65	124	286		64	45	9,5	9,5	10,00
355 05 SPZ	5	355	359	5	2517	65	124	326		64	45	9,5	9,5	12,10
400 05 SPZ	5	400	404	5	3020	75	146	371		64	51	6,5	6,5	13,80
450 05 SPZ	5	450	454	5	3020	75	146	421		64	51	6,5	6,5	16,00
500 05 SPZ	5	500	504	4	3030	75	146	471		64	76	6	6	20,50
630 05 SPZ	5	630	634	4	3030	75	146	601		64	76	6	6	27,60
800 05 SPZ	5	800	804	4	3535	90	178	771		64	89	12,5	12,5	44,00

SPZ - 6

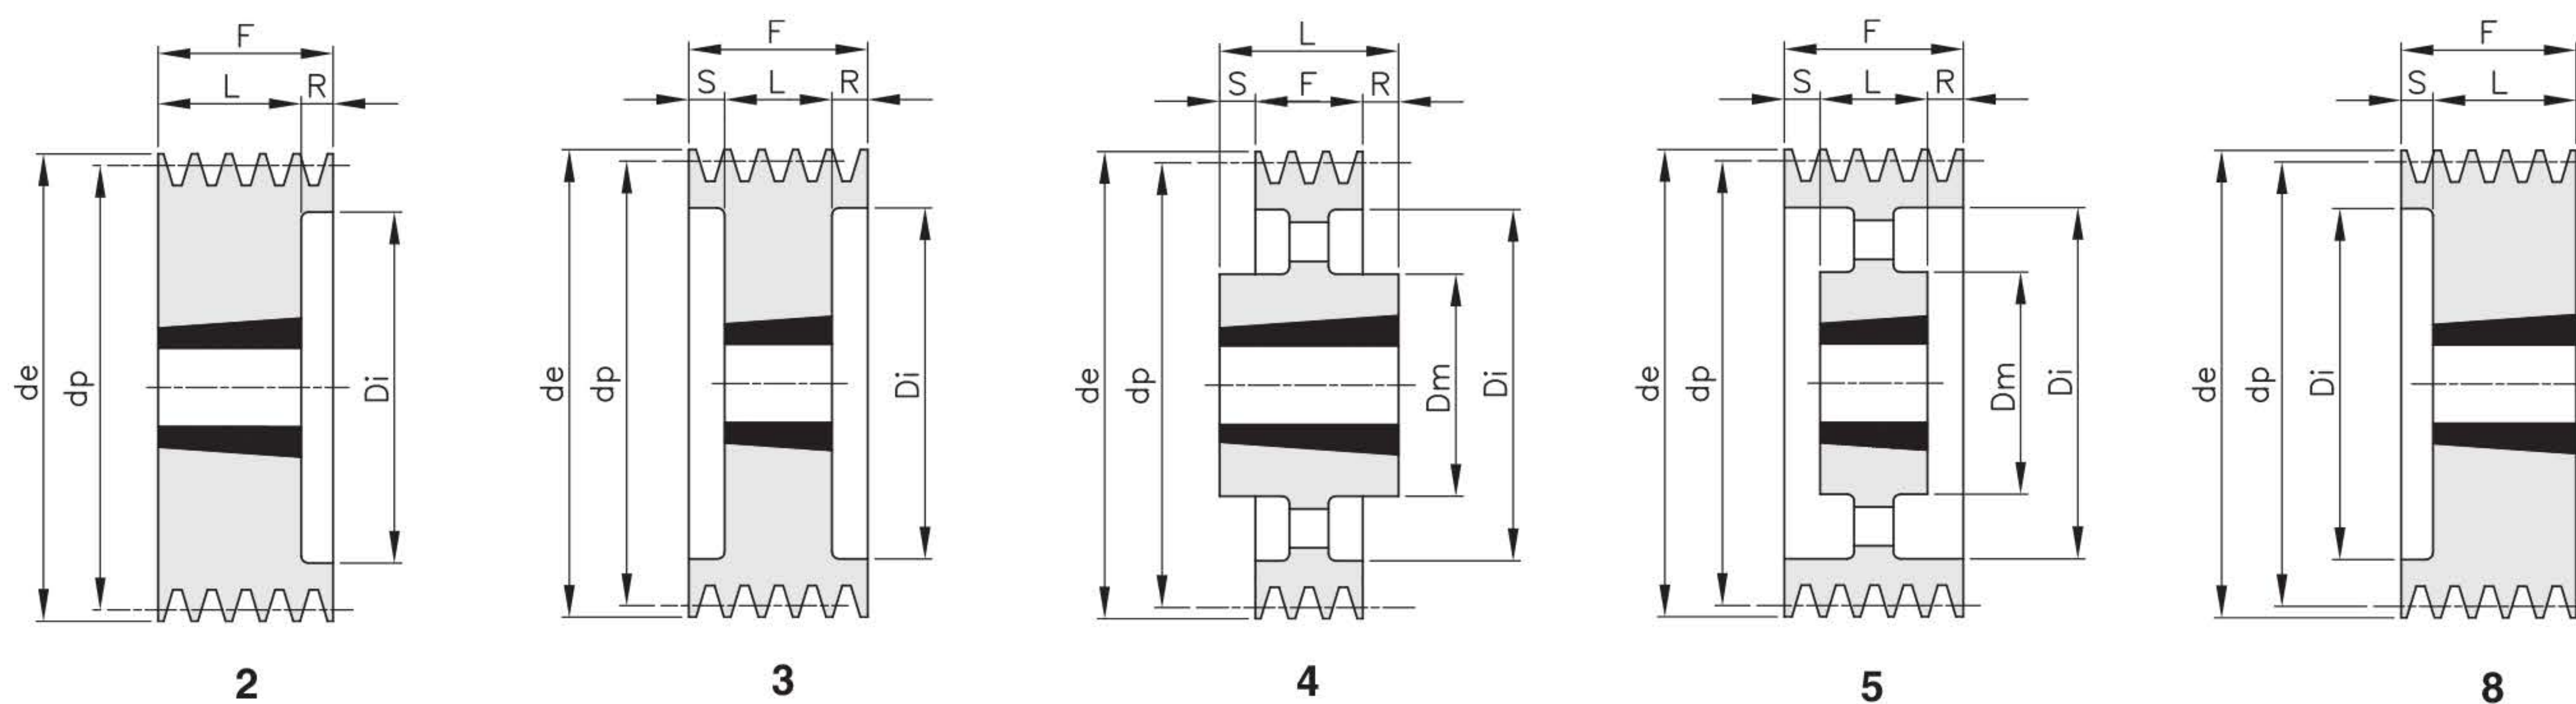


codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
90 06 SPZ	6	90	94	8	1610	42		61		76	25		51	1,50
95 06 SPZ	6	95	99	8	1610	42		66		76	25		51	1,70
100 06 SPZ	6	100	104	8	2012	50		71		76	32		44	1,80
106 06 SPZ	6	106	110	8	2012	50		76		76	32		44	2,00
112 06 SPZ	6	112	116	8	2012	50		83		76	32		44	2,20
118 06 SPZ	6	118	122	8	2517	65		90		76	45		31	2,40
125 06 SPZ	6	125	129	8	2517	65		96		76	45		31	2,90
132 06 SPZ	6	132	136	8	2517	65		103		76	45		31	3,20
140 06 SPZ	6	140	144	2	2517	65		111		76	45	31		3,50
150 06 SPZ	6	150	154	2	2517	65		121		76	45	31		4,50
160 06 SPZ	6	160	164	2	2517	65		131		76	45	31		5,50
170 06 SPZ	6	170	174	2	2517	65		141		76	45	31		6,50
180 06 SPZ	6	180	184	3	2517	65		151		76	45	15,5	15,5	6,50
190 06 SPZ	6	190	194	3	2517	65		161		76	45	15,5	15,5	6,40
200 06 SPZ	6	200	204	3	2517	65		171		76	45	15,5	15,5	6,20
224 06 SPZ	6	224	228	5	2517	65	124	195		76	45	15,5	15,5	7,10
250 06 SPZ	6	250	254	5	2517	65	124	221		76	45	15,5	15,5	8,30
280 06 SPZ	6	280	284	5	2517	65	124	251		76	45	15,5	15,5	9,90
315 06 SPZ	6	315	319	5	2517	65	124	286		76	45	15,5	15,5	11,50
355 06 SPZ	6	355	359	5	2517	65	124	326		76	45	15,5	15,5	14,00
400 06 SPZ	6	400	404	5	3030	75	146	371		76	76			17,60
450 06 SPZ	6	450	454	5	3030	75	146	421		76	76			21,60
500 06 SPZ	6	500	504	5	3030	75	146	471		76	76			23,00
630 06 SPZ	6	630	634	4	3535	90	175	601		76	89	6,5	6,5	33,00
800 06 SPZ	6	800	804	4	3535	90	178	771		76	89	6,5	6,5	52,00

SPZ - 8

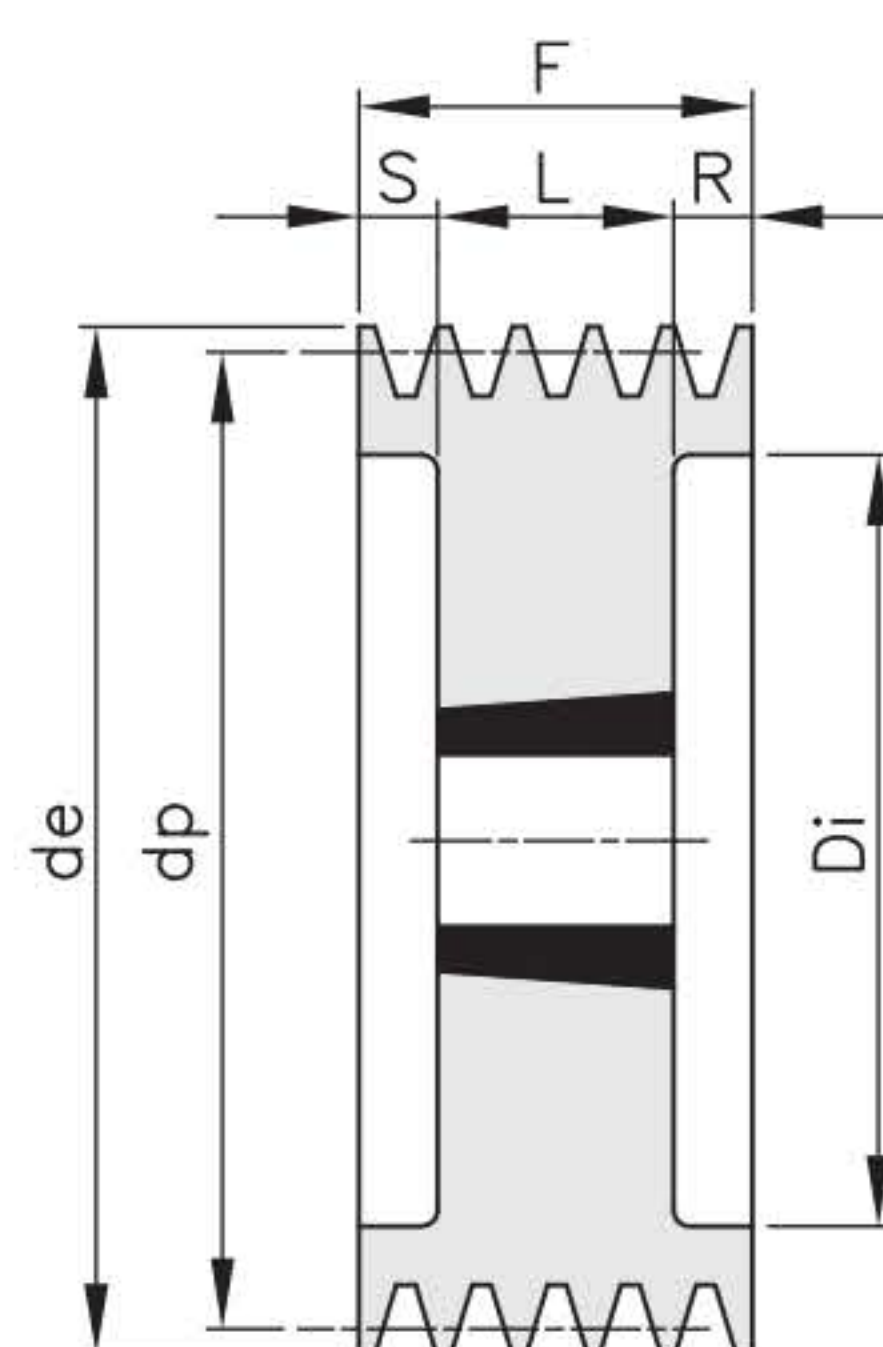


3

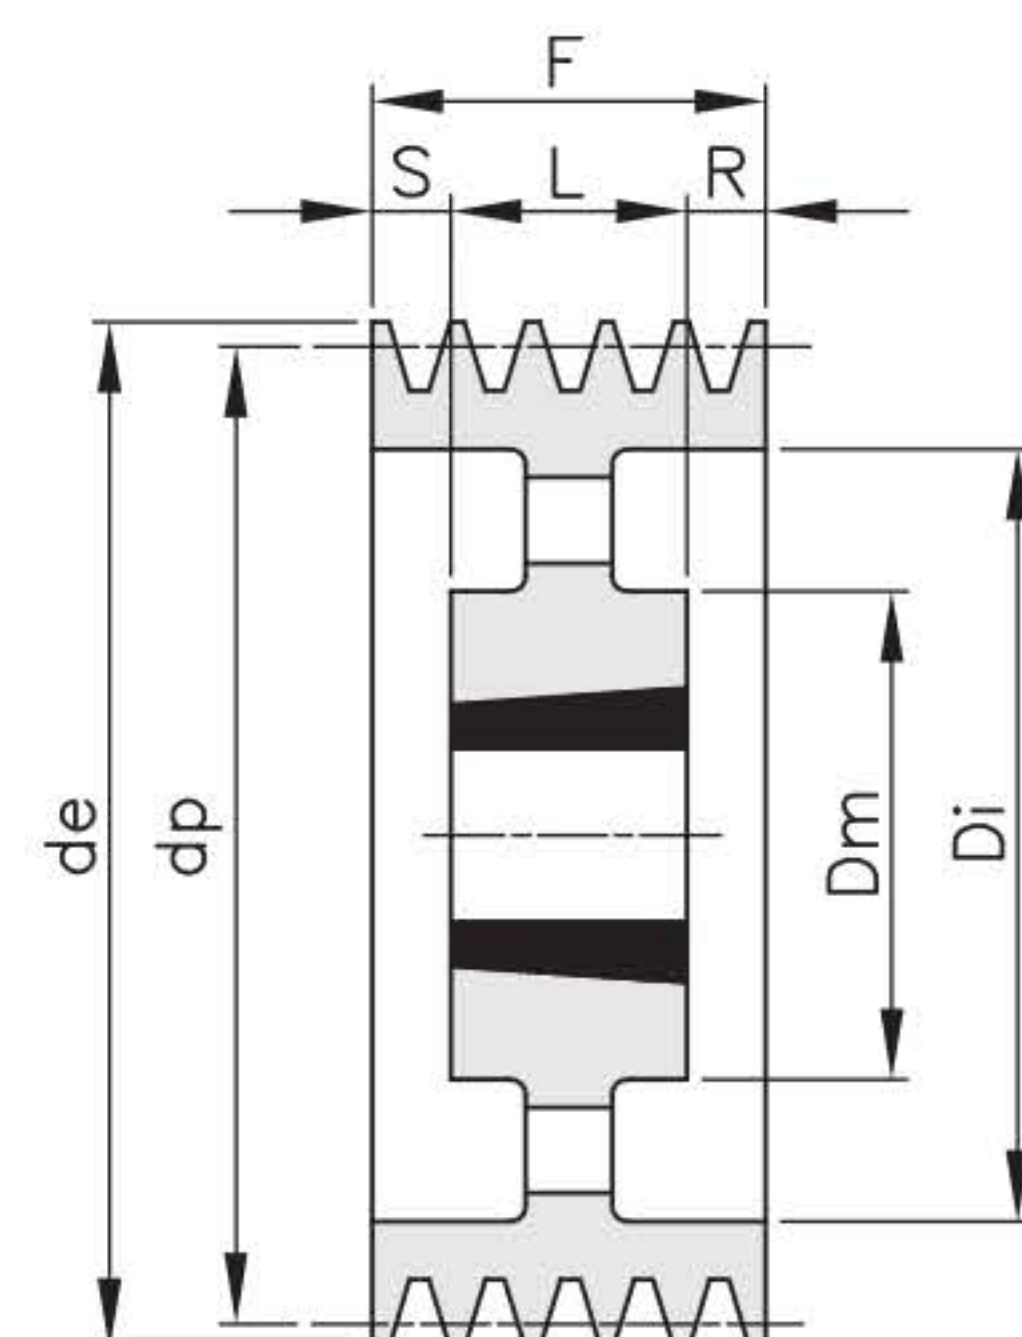


5

codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
140 08 SPZ	8	140	144	3	2517	65		111		100	45	27,5	27,5	4,00
150 08 SPZ	8	150	154	3	2517	65		121		100	45	27,5	27,5	5,10
160 08 SPZ	8	160	164	3	2517	65		131		100	45	27,5	27,5	5,60
180 08 SPZ	8	180	184	3	2517	65		151		100	45	27,5	27,5	7,10
200 08 SPZ	8	200	204	3	3020	75		171		100	51	24,5	24,5	9,30
224 08 SPZ	8	224	228	3	3020	75		195		100	51	24,5	24,5	11,80
250 08 SPZ	8	250	254	5	3020	75	146	221		100	51	24,5	24,5	10,50
280 08 SPZ	8	280	284	5	3020	75	146	251		100	51	24,5	24,5	10,80
355 08 SPZ	8	355	359	5	3030	75	146	326		100	76	12	12	16,00
400 08 SPZ	8	400	404	5	3030	75	146	371		100	76	12	12	18,20
450 08 SPZ	8	450	454	5	3535	90	175	421		100	89	5,5	5,5	24,00

SPA - 1

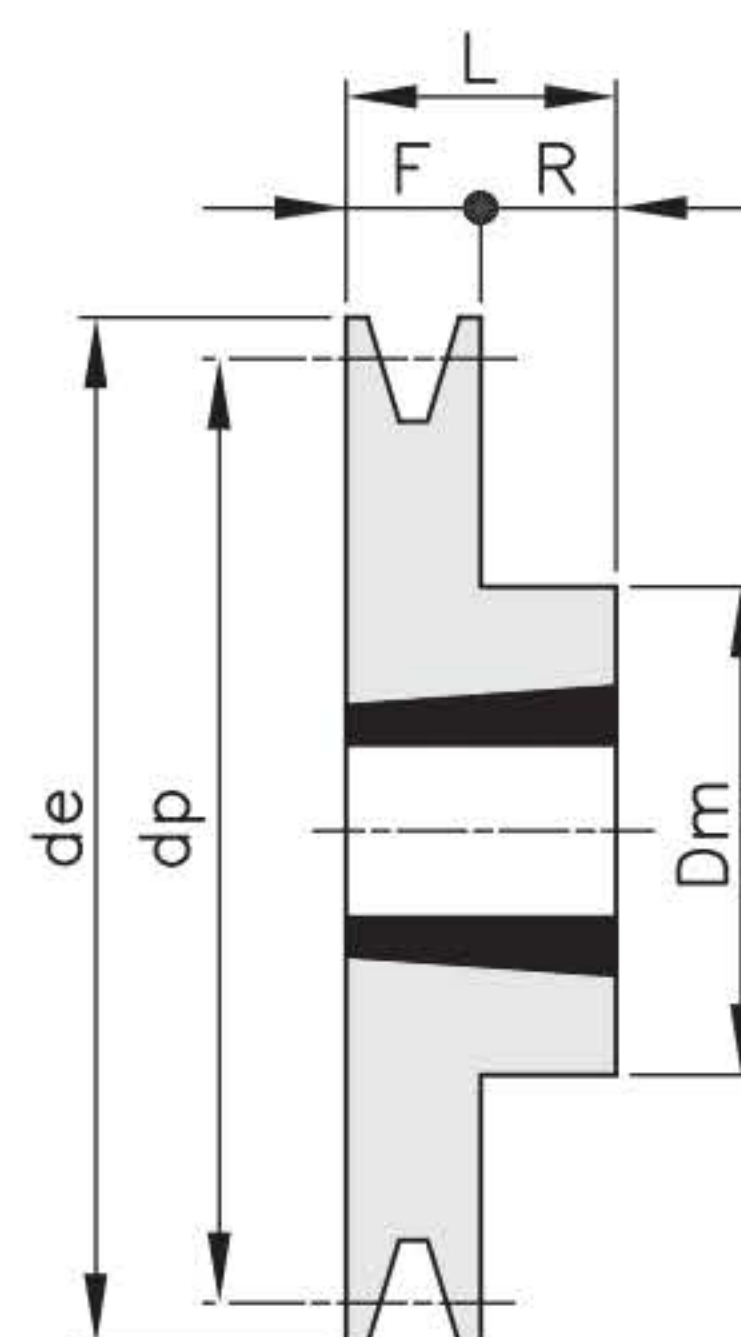


1

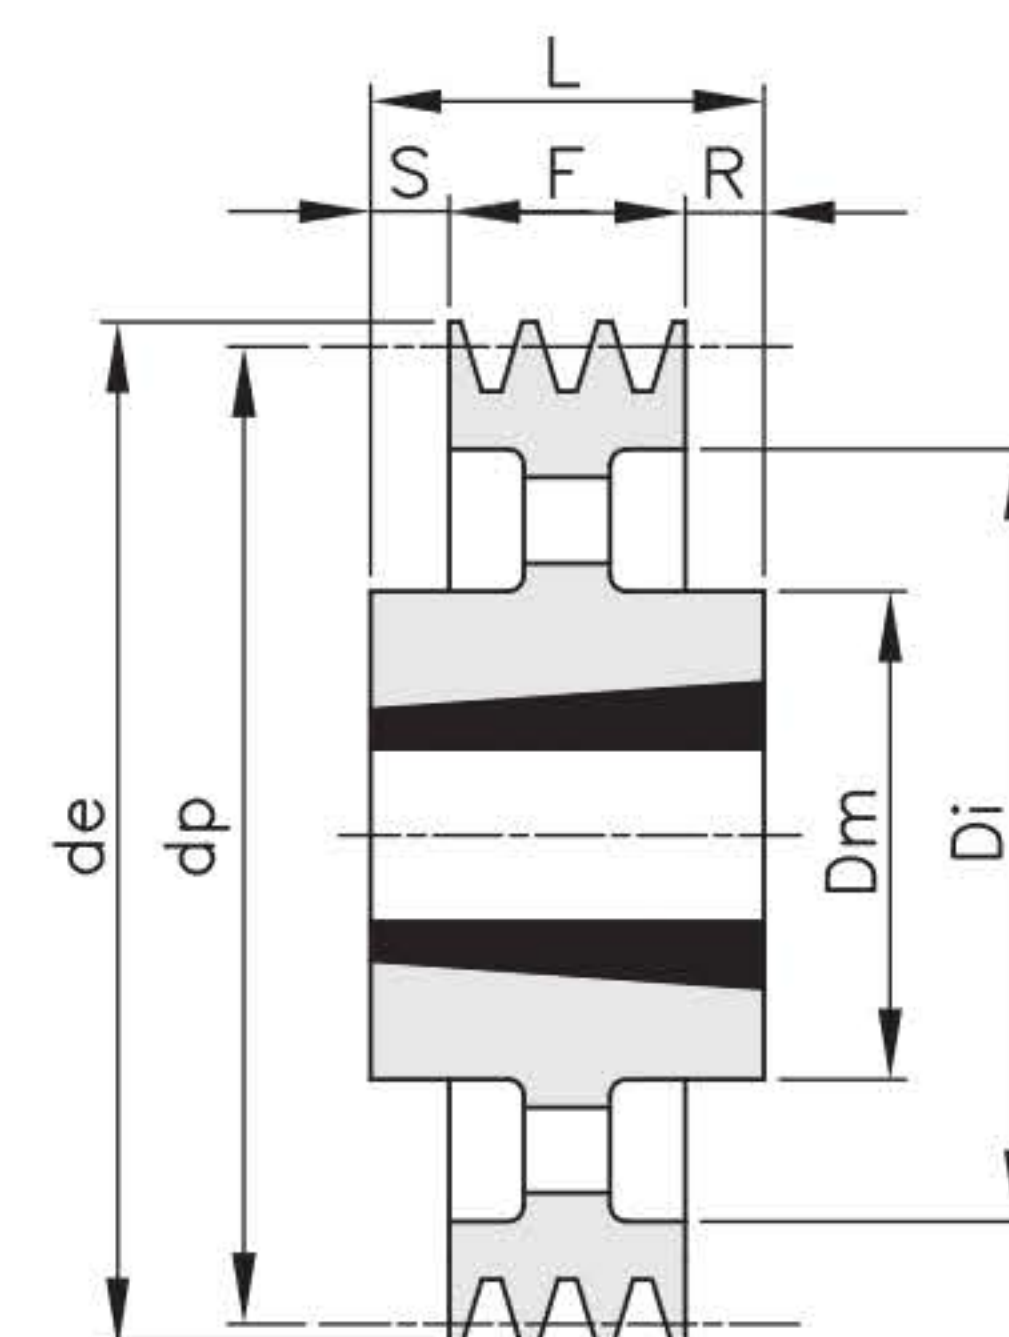


4

codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
63 01 SPA	1	63	68,5	1	1008	25	56			20	22	2		0,70
67 01 SPA	1	67	72,5	1	1108	28	56			20	22	2		0,50
71 01 SPA	1	71	76,5	1	1108	28	60			20	22	2		0,50
75 01 SPA	1	75	80,5	1	1108	28	60			20	22	2		0,60
80 01 SPA	1	80	85,5	1	1210	32	75			20	25	5		0,60
85 01 SPA	1	85	90,5	1	1210	32	80			20	25	5		0,70
90 01 SPA	1	90	95,5	1	1210	32	80			20	25	5		0,70
95 01 SPA	1	95	100,5	1	1210	32	85			20	25	5		0,80
100 01 SPA	1	100	105,5	1	1610	42	85			20	25	5		0,90
106 01 SPA	1	106	111,5	1	1610	42	92			20	25	5		1,00
112 01 SPA	1	112	117,5	1	1610	42	92			20	25	5		1,20
118 01 SPA	1	118	123,5	1	1610	42	92			20	25	5		1,30
125 01 SPA	1	125	130,5	1	1610	42	92			20	25	5		1,40
132 01 SPA	1	132	137,5	1	1610	42	92			20	25	5		1,50
140 01 SPA	1	140	145,5	1	1610	42	92			20	25	5		1,60
150 01 SPA	1	150	155,5	1	1610	42	92			20	25	5		1,70
160 01 SPA	1	160	165,5	1	1610	42	92			20	25	5		2,00
170 01 SPA	1	170	175,5	1	1610	42	92			20	25	5		1,80
180 01 SPA	1	180	185,5	4	1610	42	92	145		20	25	5		1,90
190 01 SPA	1	190	195,5	4	1610	42	92	156		20	25	5		2,50
200 01 SPA	1	200	205,5	4	2012	50	108	165		20	32	12		2,80
212 01 SPA	1	212	217,5	4	2012	50	110	177		20	32	12		2,90
224 01 SPA	1	224	229,5	4	2012	50	112	189		20	32	12		3,00
236 01 SPA	1	236	241,5	4	2012	50	112	202		20	32	12		3,20
250 01 SPA	1	250	255,5	4	2012	50	112	215		20	32	6	6	3,60
280 01 SPA	1	280	285,5	4	2012	50	112	245		20	32	12		4,20
300 01 SPA	1	300	305,5	4	2012	50	112	265		20	32	12		4,30
315 01 SPA	1	315	320,5	4	2012	50	112	280		20	32	12		5,20
355 01 SPA	1	355	360,5	4	2012	50	112	320		20	32	12		5,90
400 01 SPA	1	400	405,5	4	2012	50	112	365		20	32	12		6,30
450 01 SPA	1	450	455,5	4	2012	50	112	415		20	32	12		6,80
500 01 SPA	1	500	505,5	4	2517	65	124	465		20	45	25		8,30
630 01 SPA	1	630	635,5	4	2517	65	124	595		20	45	25		12,50


SPA - 2

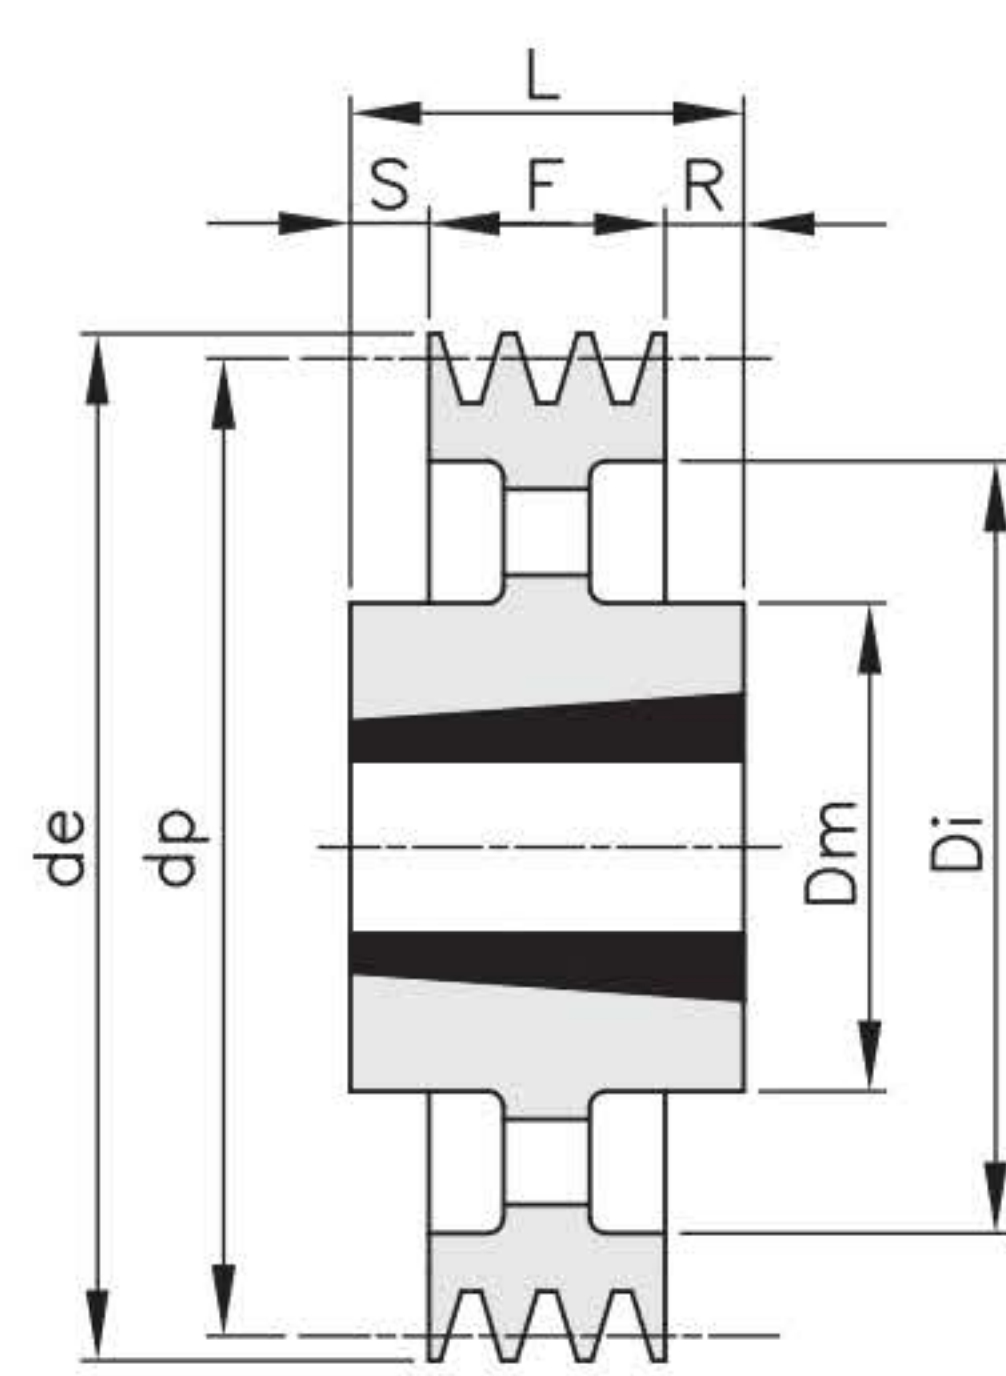


4

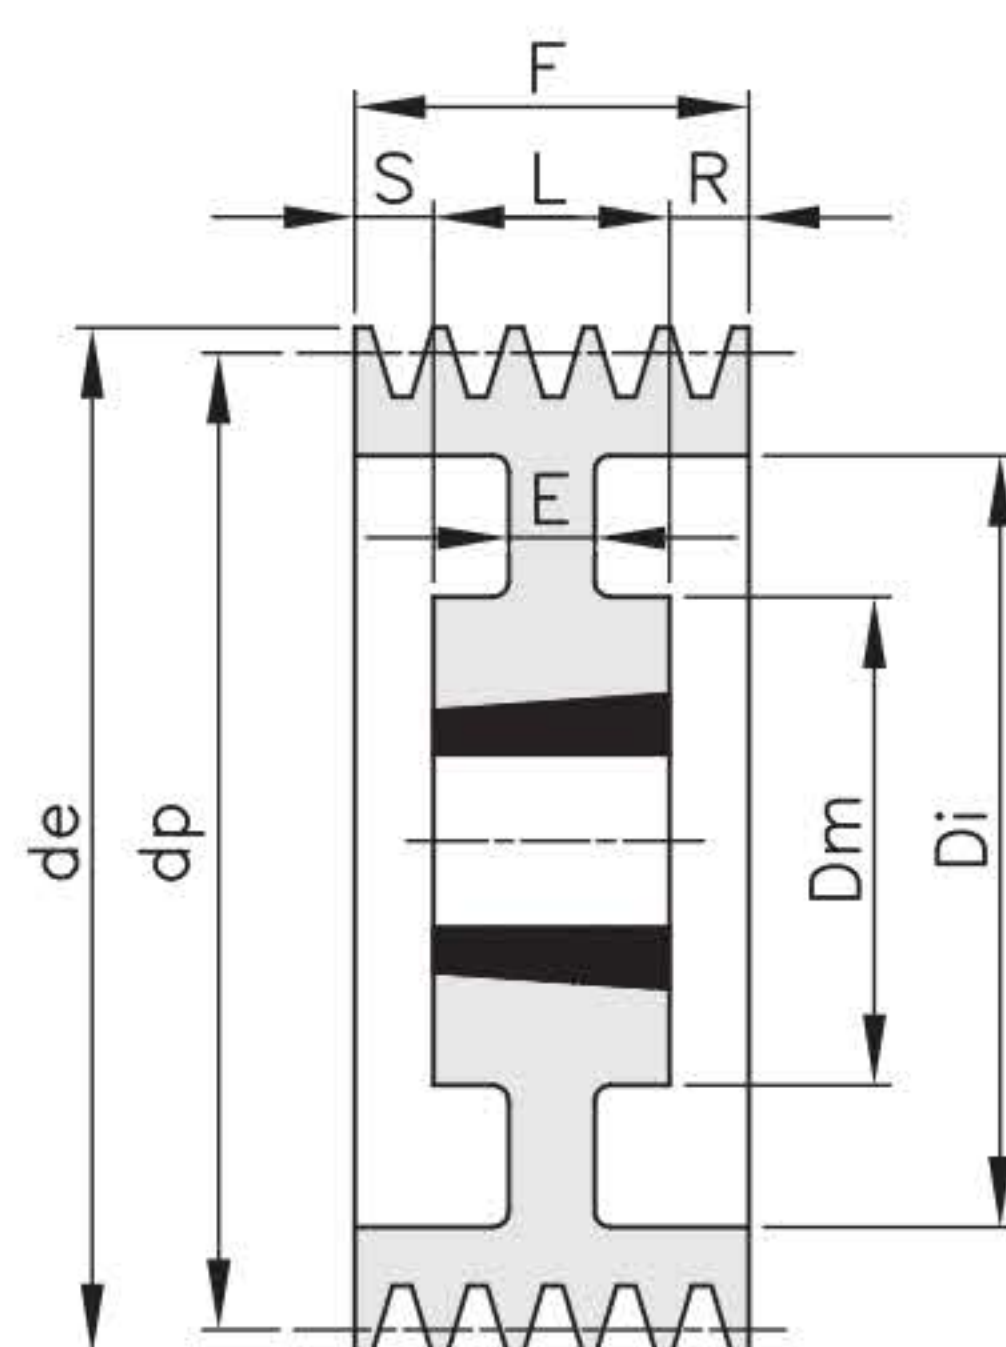

6

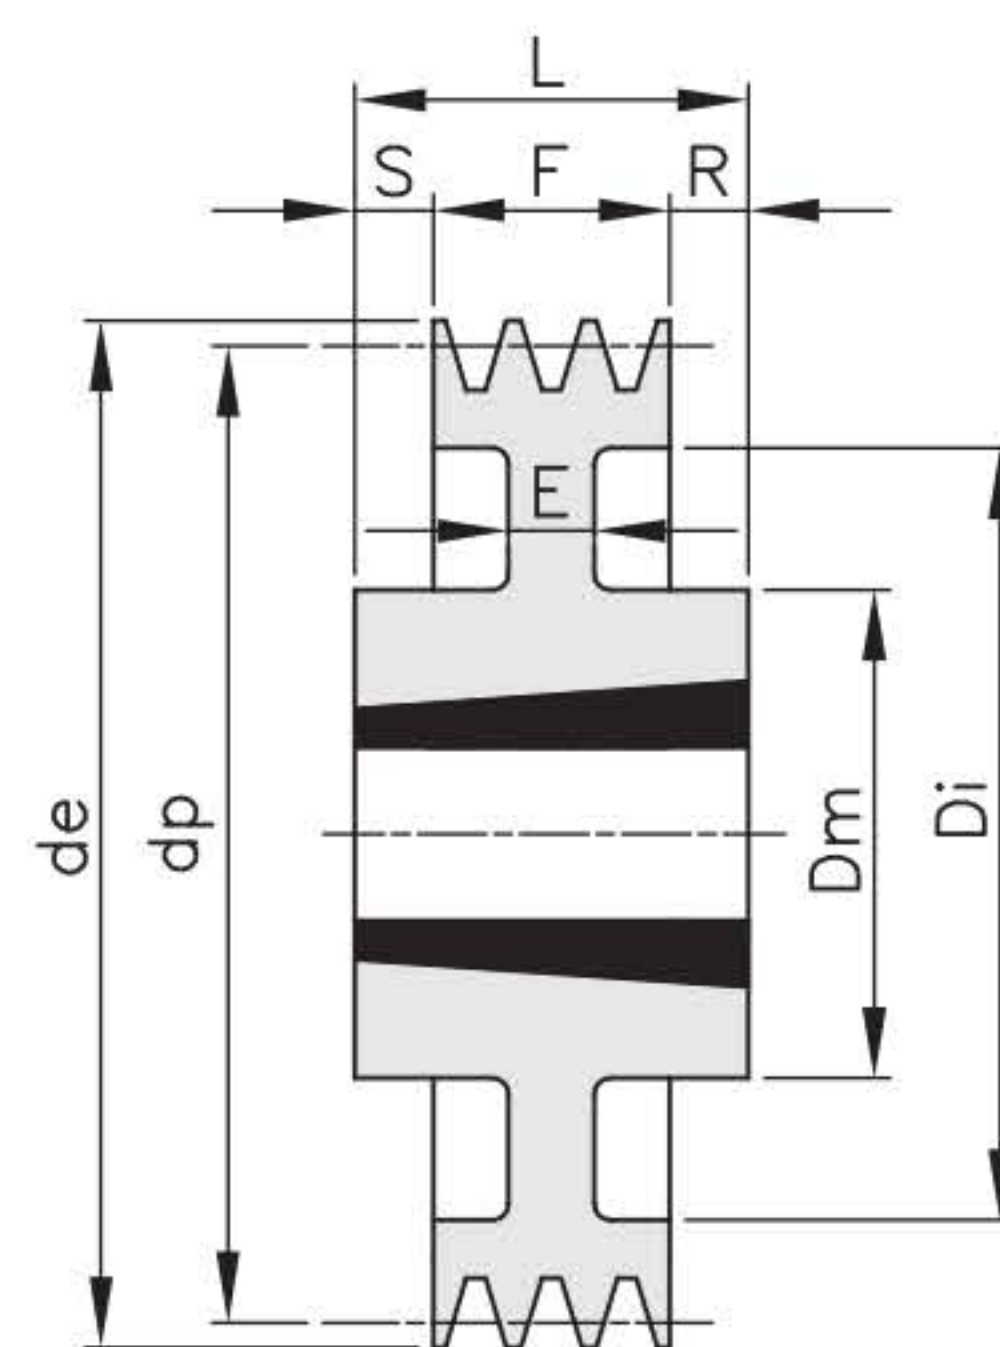


7

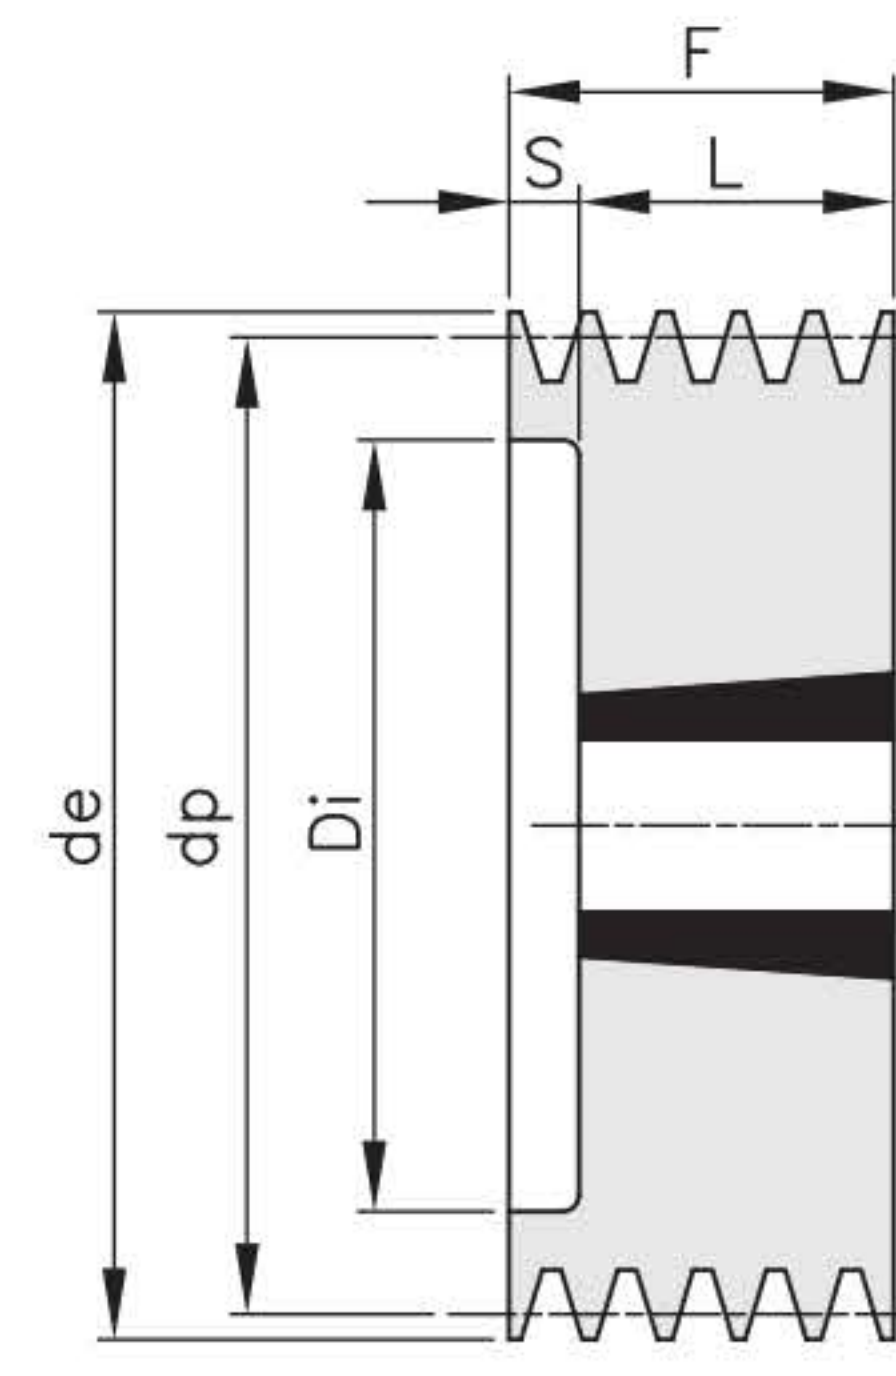

8


codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
* 63 02 SPA	2	63	68,5	8	1008	25		32,5		35	22		13	0,50
67 02 SPA	2	67	72,5	8	1108	28		37		35	22		13	0,60
71 02 SPA	2	71	76,5	8	1108	28		40		35	22		13	0,60
75 02 SPA	2	75	80,5	8	1108	28		44		35	25		13	0,70
80 02 SPA	2	80	85,5	8	1210	32		50		35	25		10	0,70
85 02 SPA	2	85	90,5	8	1210	32		55		35	25		10	0,80
90 02 SPA	2	90	95,5	8	1610	42		59		35	25		10	0,90
95 02 SPA	2	95	100,5	8	1610	42		63		35	25		10	1,00
100 02 SPA	2	100	105,5	8	1610	42		66		35	25		10	1,00
106 02 SPA	2	106	111,5	8	1610	42		72		35	25		10	1,20
112 02 SPA	2	112	117,5	8	1610	42		78		35	25		10	1,40
118 02 SPA	2	118	123,5	8	1610	42		84		35	25		10	1,70
125 02 SPA	2	125	130,5	8	1610	42		91		35	25		10	1,90
132 02 SPA	2	132	137,5	8	2012	50		98		35	32		3	2,10
140 02 SPA	2	140	145,5	8	2012	50		106		35	32		3	2,60
150 02 SPA	2	150	155,5	8	2012	50		116		35	32		3	3,20
160 02 SPA	2	160	165,5	8	2012	50		125		35	32		3	3,60
170 02 SPA	2	170	175,5	8	2012	50		135		35	32		3	4,00
180 02 SPA	2	180	185,5	6	2012	50	108	146	10	35	32	1,5	1,5	5,00
190 02 SPA	2	190	195,5	6	2012	50	108	156	10	35	32	1,5	1,5	4,40
200 02 SPA	2	200	205,5	7	2517	65	123	163	10	35	45	5	5	4,50
212 02 SPA	2	212	217,5	4	2517	65	123	177		35	45	5	5	4,70
224 02 SPA	2	224	229,5	4	2517	65	124	189		35	45	10		5,00
236 02 SPA	2	236	241,5	4	2517	65	124	202		35	45	10		5,40
250 02 SPA	2	250	255,5	4	2517	65	124	215		35	45	5	5	5,60
280 02 SPA	2	280	285,5	4	2517	65	124	245		35	45	10		6,20
300 02 SPA	2	300	305,5	4	2517	65	124	265		35	45	10		6,80
315 02 SPA	2	315	320,5	4	2517	65	124	280		35	45	10		7,20
355 02 SPA	2	355	360,5	4	2517	65	124	320		35	45	10		9,40
400 02 SPA	2	400	405,5	4	2517	65	124	365		35	45	10		10,00
450 02 SPA	2	450	455,5	4	2517	65	124	415		35	45	10		10,50
500 02 SPA	2	500	505,5	4	2517	65	124	465		35	45	10		11,00
630 02 SPA	2	630	635,5	4	3020	75	159	595		35	51	8	8	20,50

SPA - 3

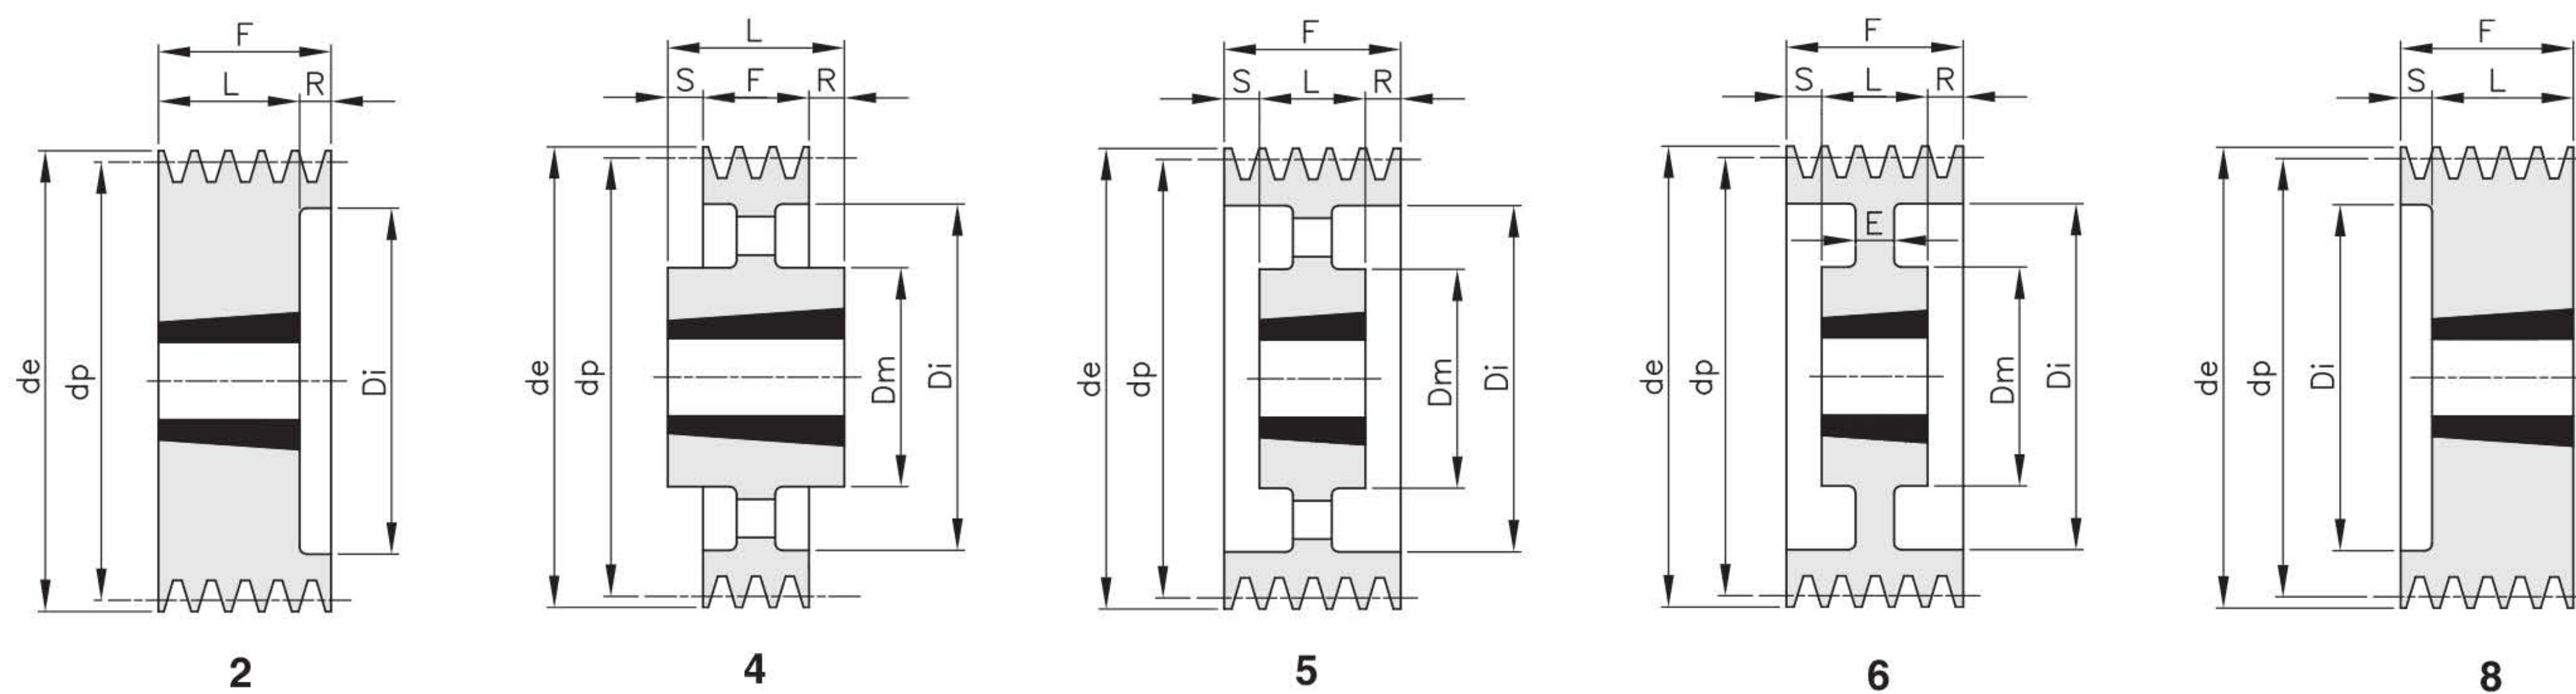


codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
71 03 SPA	3	71	76,5	8	1108	28		40		50	22		28	0,80
75 03 SPA	3	75	80,5	8	1108	28		44		50	22		28	0,90
80 03 SPA	3	80	85,5	8	1210	32		50		50	25		25	1,10
85 03 SPA	3	85	90,5	8	1210	32		55		50	25		25	1,20
90 03 SPA	3	90	95,5	8	1610	42		59		50	25		25	1,30
95 03 SPA	3	95	100,5	8	1610	42		63		50	25		25	1,50
100 03 SPA	3	100	105,5	2	1610	42		66		50	25	25		1,80
106 03 SPA	3	106	111,5	2	1610	42		72		50	25	25		2,10
112 03 SPA	3	112	117,5	8	2012	50		78		50	32		18	2,30
118 03 SPA	3	118	123,5	2	2012	50		84		50	32	18		2,50
125 03 SPA	3	125	130,5	2	2012	50		91		50	32	18		2,70
132 03 SPA	3	132	137,5	2	2012	50		98		50	32	18		2,90
140 03 SPA	3	140	145,5	8	2517	65		106		50	45		5	3,20
150 03 SPA	3	150	155,5	8	2517	65		116		50	45		5	3,50
160 03 SPA	3	160	165,5	8	2517	65		125		50	45		5	4,50
170 03 SPA	3	170	175,5	8	2517	65		135		50	45		5	5,00
180 03 SPA	3	180	185,5	8	2517	65		146		50	45		5	5,50
190 03 SPA	3	190	195,5	8	2517	65		156		50	45		5	6,30
200 03 SPA	3	200	205,5	6	2517	65	123	165	20	50	45	2,5	2,5	5,80
212 03 SPA	3	212	217,5	5	2517	65	123	177		50	45	2,5	2,5	6,00
224 03 SPA	3	224	229,5	5	2517	65	124	189		50	45	2,5	2,5	6,30
236 03 SPA	3	236	241,5	5	2517	65	124	202		50	45	2,5	2,5	6,60
250 03 SPA	3	250	255,5	5	2517	65	124	215		50	45	2,5	2,5	7,30
280 03 SPA	3	280	285,5	5	2517	65	124	245		50	45	2,5	2,5	8,00
300 03 SPA	3	300	305,5	4	3020	75	159	265		50	51	0,5	0,5	9,10
315 03 SPA	3	315	320,5	4	3020	75	159	280		50	51	0,5	0,5	9,40
355 03 SPA	3	355	360,5	4	3020	75	159	320		50	51	0,5	0,5	11,50
400 03 SPA	3	400	405,5	4	3020	75	159	365		50	51	1		13,30
450 03 SPA	3	450	455,5	4	3020	75	159	415		50	51	1		14,20
500 03 SPA	3	500	505,5	4	3020	75	159	465		50	51	1		16,10
560 03 SPA	3	560	565,5	4	3020	75	159	525		50	51	1		18,00
630 03 SPA	3	630	635,5	4	3020	75	159	595		50	51	1		20,00
800 03 SPA	3	800	805,5	4	3535	90	175	765		50	89	19,5	19,5	34,50
1000 03 SPA	3	1000	1005,5	4	3535	90	175	965		50	89	19,5	19,5	49,30

SPA - 4

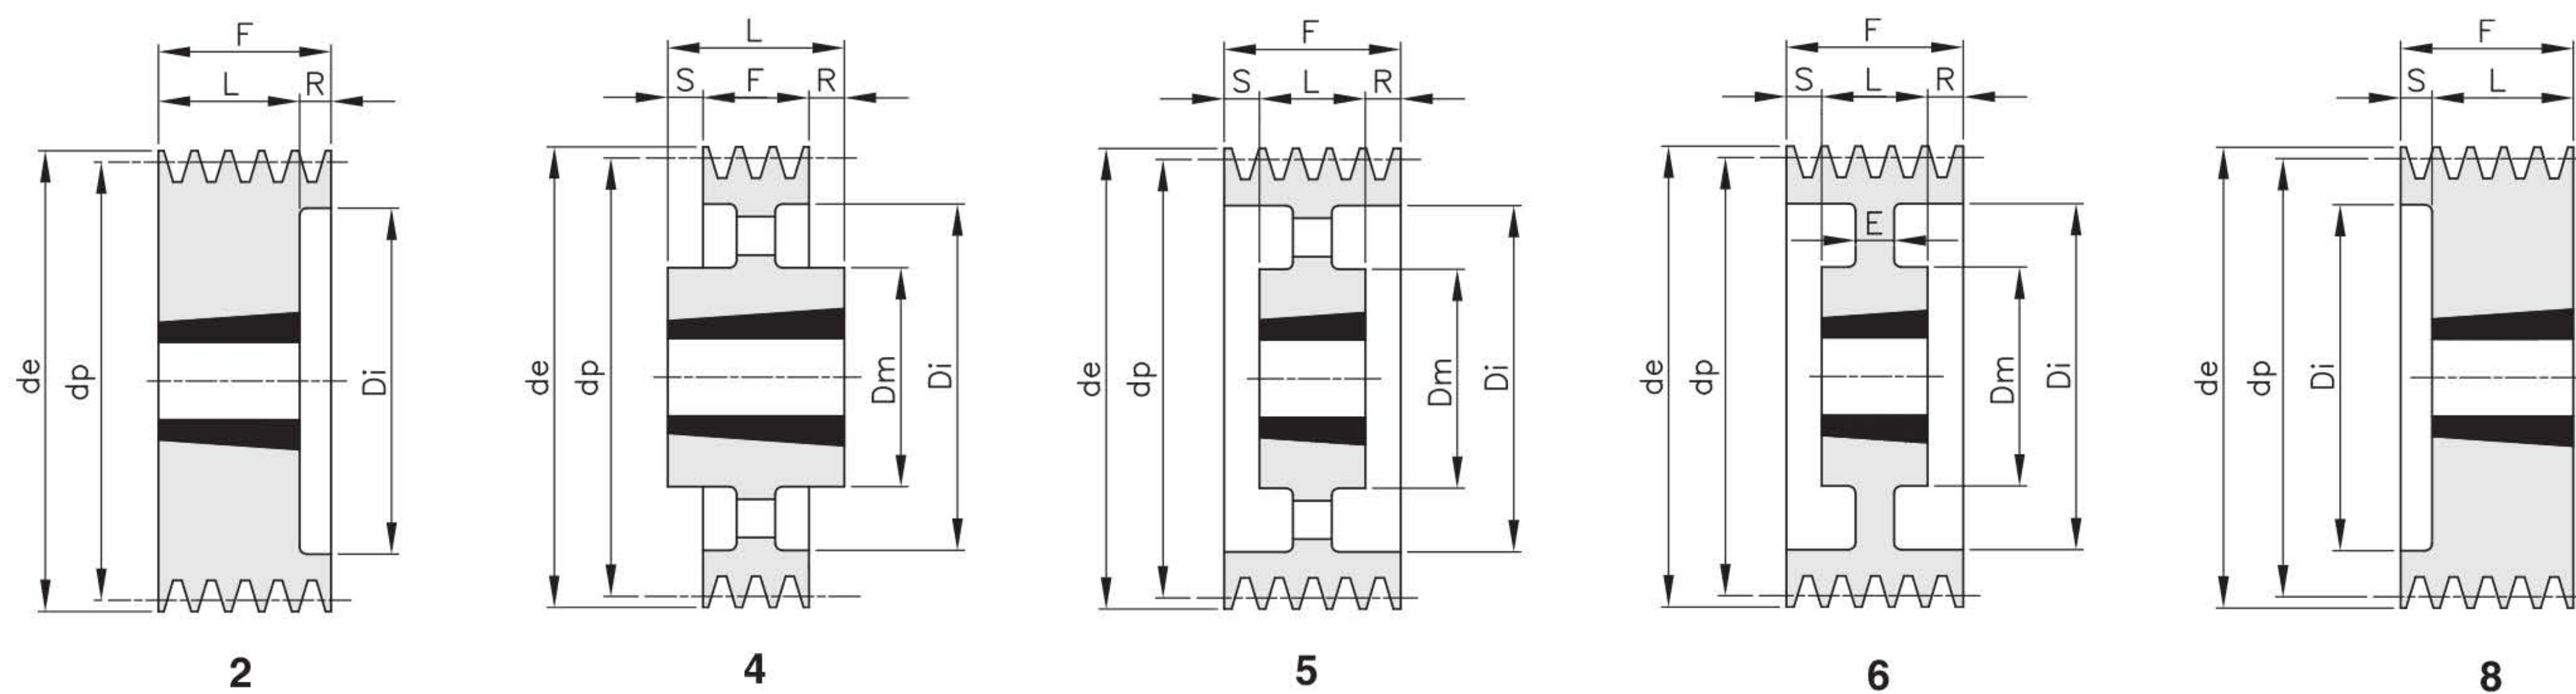


codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
90 04 SPA	4	90	95,5	8	1615	42		59		65	38		27	1,40
95 04 SPA	4	95	100,5	8	1615	42		63		65	38		27	1,60
100 04 SPA	4	100	105,5	2	1615	42		66		65	38	27		1,80
106 04 SPA	4	106	111,5	8	2012	50		72		65	32		33	2,10
112 04 SPA	4	112	117,5	8	2012	50		78		65	32		33	2,50
118 04 SPA	4	118	123,5	2	2012	50		84		65	32	33		2,80
125 04 SPA	4	125	130,5	2	2012	50		91		65	32	33		3,00
132 04 SPA	4	132	137,5	2	2517	65		98		65	45	20		3,20
140 04 SPA	4	140	145,5	2	2517	65		106		65	45	20		3,50
150 04 SPA	4	150	155,5	2	2517	65		116		65	45	20		3,90
160 04 SPA	4	160	165,5	2	2517	65		125		65	45	20		4,30
170 04 SPA	4	170	175,5	2	2517	65		135		65	45	20		5,80
180 04 SPA	4	180	185,5	2	2517	65		146		65	45	20		6,20
190 04 SPA	4	190	195,5	2	2517	65		156		65	45	20		6,80
200 04 SPA	4	200	205,5	2	3020	75		165		65	51	14		7,50
212 04 SPA	4	212	217,5	2	3020	75		177		65	51	14		8,40
224 04 SPA	4	224	229,5	2	3020	75		189		65	51	14		8,80
236 04 SPA	4	236	241,5	6	3020	75	159	202	20	65	51	14		9,80
250 04 SPA	4	250	255,5	5	3020	75	159	215		65	51	7	7	10,00
280 04 SPA	4	280	285,5	5	3020	75	159	245		65	51	7	7	11,50
300 04 SPA	4	300	305,5	5	3020	75	159	265		65	51	7	7	12,40
315 04 SPA	4	315	320,5	5	3020	75	159	280		65	51	7	7	12,90
355 04 SPA	4	355	360,5	5	3020	75	159	320		65	51	7	7	13,50
400 04 SPA	4	400	405,5	5	3020	75	159	365		65	51	7	7	14,00
450 04 SPA	4	450	455,5	5	3020	75	159	415		65	51	7	7	15,80
500 04 SPA	4	500	505,5	5	3020	75	159	465		65	51	7	7	18,70
560 04 SPA	4	560	565,5	4	3535	90	175	525		65	89	12	12	24,50
630 04 SPA	4	630	635,5	4	3535	90	175	595		65	89	12	12	30,00
800 04 SPA	4	800	805,5	4	3535	90	175	765		65	89	12	12	43,20
1000 04 SPA	4	1000	1005,5	4	4040	100	210	965		65	102	18,5	18,5	69,00

SPA - 5

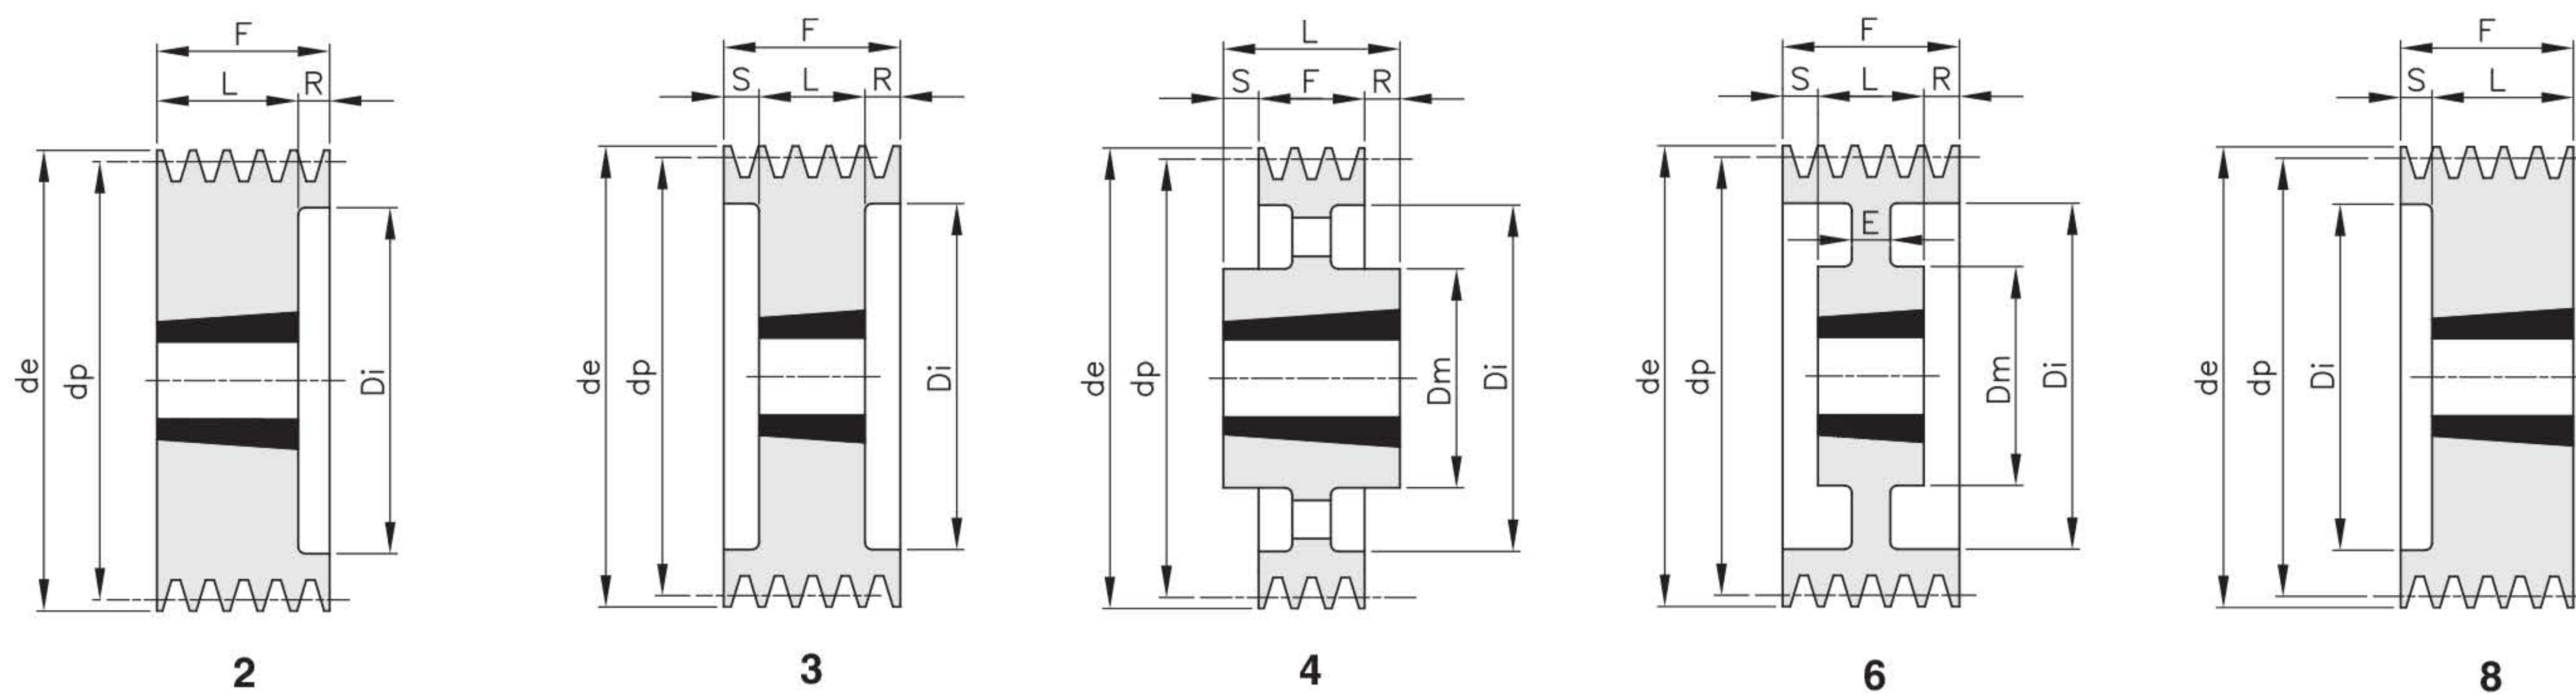


codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
100 05 SPA	5	100	105,5	2	1615	42		66		80	38	42		2,10
106 05 SPA	5	106	111,5	8	2012	50		72		80	32		48	2,30
112 05 SPA	5	112	117,5	8	2012	50		78		80	32		48	2,50
118 05 SPA	5	118	123,5	2	2012	50		84		80	32	48		2,80
125 05 SPA	5	125	130,5	3	2012	50		91		80	32	24	24	3,00
132 05 SPA	5	132	137,5	3	2517	65		98		80	45	17,5	17,5	3,50
140 05 SPA	5	140	145,5	3	2517	65		106		80	45	17,5	17,5	3,90
150 05 SPA	5	150	155,5	3	2517	65		116		80	45	17,5	17,5	4,40
160 05 SPA	5	160	165,5	3	2517	65		125		80	45	17,5	17,5	5,70
170 05 SPA	5	170	175,5	3	2517	65		135		80	45	17,5	17,5	6,30
180 05 SPA	5	180	185,5	3	3020	75		146		80	51	14,5	14,5	6,90
190 05 SPA	5	190	195,5	2	3020	75		156		80	51	29		7,70
200 05 SPA	5	200	205,5	3	3020	75		168		80	51	14,5	14,5	9,00
212 05 SPA	5	212	217,5	2	3020	75		177		80	51	29		9,80
224 05 SPA	5	224	229,5	2	3020	75		189		80	51	29		10,20
236 05 SPA	5	236	241,5	2	3020	75		202		80	51	29		11,20
250 05 SPA	5	250	255,5	6	3020	75	159	215	20	80	51	14,5	14,5	12,40
280 05 SPA	5	280	285,5	4	3535	90	175	245		80	89	4,5	4,5	15,00
300 05 SPA	5	300	305,5	4	3535	90	175	265		80	89	4,5	4,5	16,50
315 05 SPA	5	315	320,5	4	3535	90	175	280		80	89	4,5	4,5	18,10
355 05 SPA	5	355	360,5	4	3535	90	175	320		80	89	4,5	4,5	19,20
400 05 SPA	5	400	405,5	4	3535	90	175	365		80	89	4,5	4,5	21,50
450 05 SPA	5	450	455,5	4	3535	90	175	415		80	89	4,5	4,5	23,00
500 05 SPA	5	500	505,5	4	3535	90	175	465		80	89	4,5	4,5	26,50
560 05 SPA	5	560	565,5	4	3535	90	175	525		80	89	4,5	4,5	30,00
630 05 SPA	5	630	635,5	4	3535	90	175	595		80	89	4,5	4,5	34,50
800 05 SPA	5	800	805,5	4	4040	100	210	765		80	102	11	11	55,50
1000 05 SPA	5	1000	1005,5	4	4545	110	242	965		80	114	17	17	80,00

SPA - 6

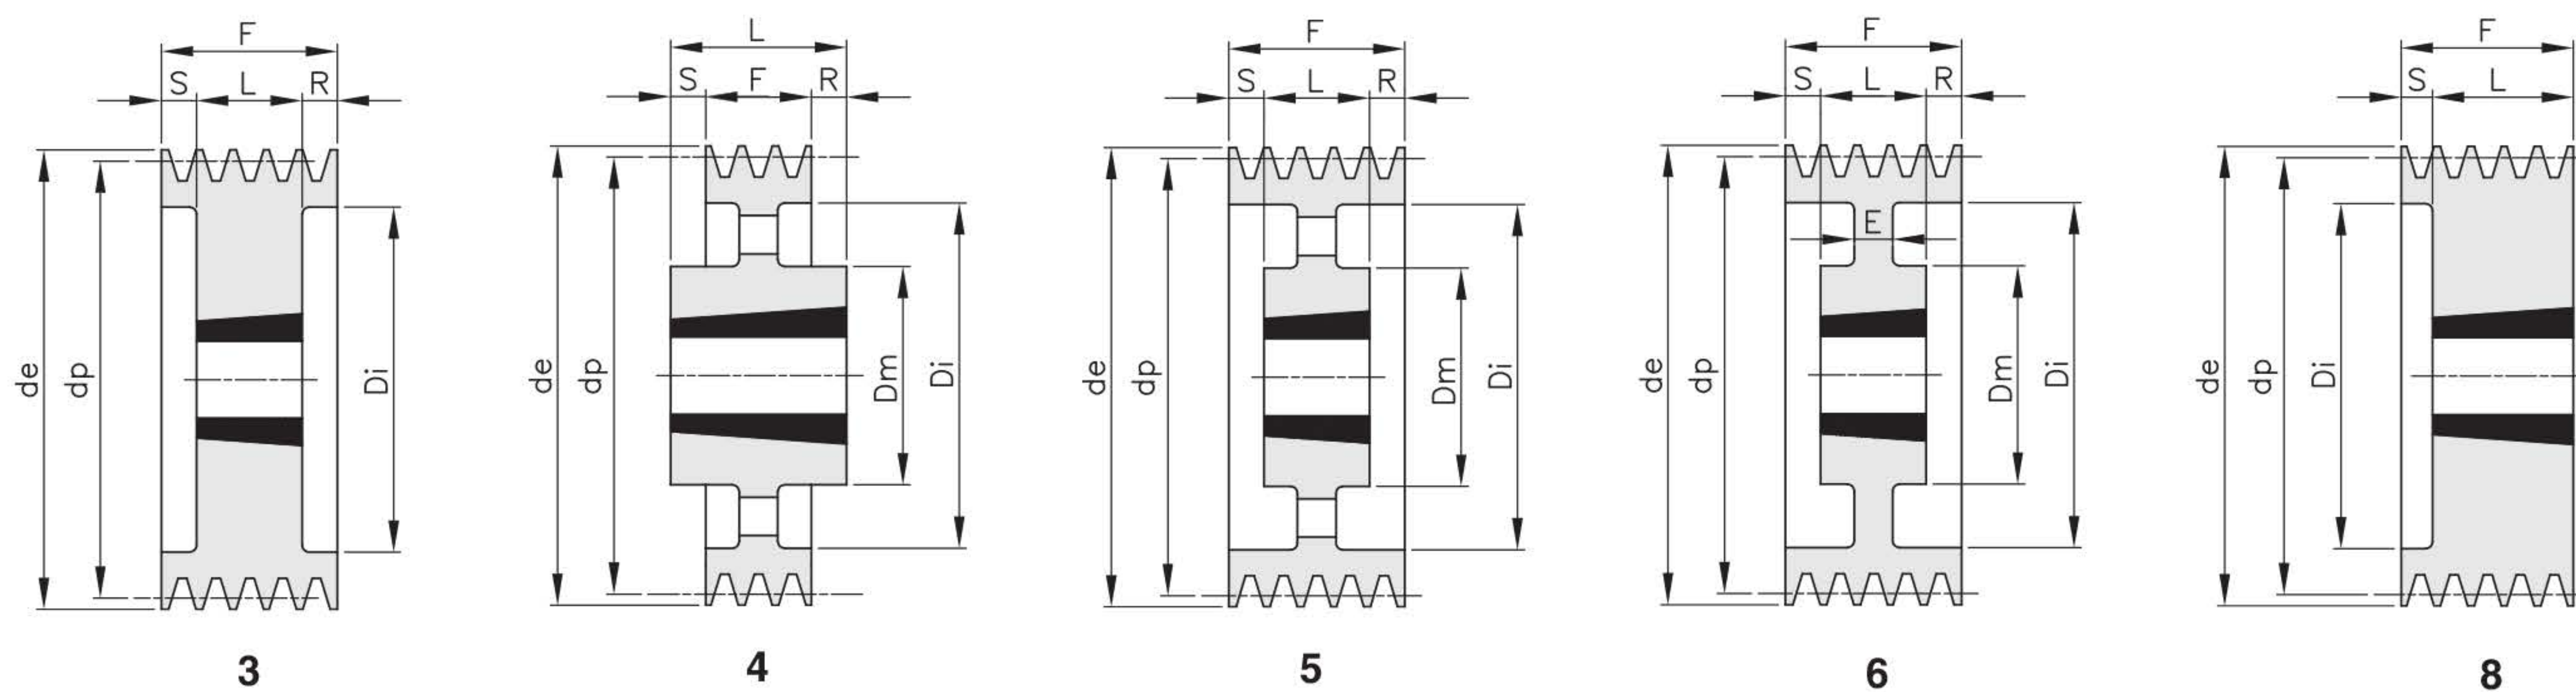


codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
100 06 SPA	6	100	105,5	3	1610	42		66		95	25	40	30	2,50
106 06 SPA	6	106	111,5	8	2012	50		72		95	32		63	2,60
112 06 SPA	6	112	117,5	8	2012	50		78		95	32		63	2,90
118 06 SPA	6	118	123,5	8	2012	50		84		95	32		63	3,30
125 06 SPA	6	125	130,5	3	2012	50		91		95	32	31,5	31,5	3,50
132 06 SPA	6	132	137,5	3	2517	65		98		95	45	25	25	3,80
140 06 SPA	6	140	145,5	3	2517	65		106		95	45	25	25	4,10
150 06 SPA	6	150	155,5	3	2517	65		116		95	45	25	25	4,90
160 06 SPA	6	160	165,5	3	2517	65		125		95	45	25	25	5,70
180 06 SPA	6	180	185,5	3	3020	75		146		95	51	22	22	8,50
200 06 SPA	6	200	205,5	3	3020	75		165		95	51	22	22	11,00
224 06 SPA	6	224	229,5	3	3020	75		189		95	51	22	22	13,40
236 06 SPA	6	236	241,5	3	3020	75		202		95	51	22	22	14,90
250 06 SPA	6	250	255,5	6	3020	75	155	215	20	95	51	22	22	16,40
280 06 SPA	6	280	285,5	5	3535	90	175	245		95	89	3	3	17,30
315 06 SPA	6	315	320,5	5	3535	90	175	280		95	89	3	3	19,50
355 06 SPA	6	355	360,5	5	3535	90	175	320		95	89	3	3	23,20
400 06 SPA	6	400	405,5	5	3535	90	175	365		95	89	3	3	22,40
450 06 SPA	6	450	455,5	5	3535	90	175	415		95	89	3	3	29,90
500 06 SPA	6	500	505,5	5	3535	90	175	465		95	89	3	3	30,40
560 06 SPA	6	560	565,5	5	3535	90	175	525		95	89	3	3	40,20
630 06 SPA	6	630	635,5	4	4040	100	210	595		95	102	3,5	3,5	48,00
800 06 SPA	6	800	805,5	4	4040	100	210	765		95	102	3,5	3,5	72,00
1000 06 SPA	6	1000	1005,5	4	4545	110	242	965		95	114	9,5	9,5	97,00


SPB - 1

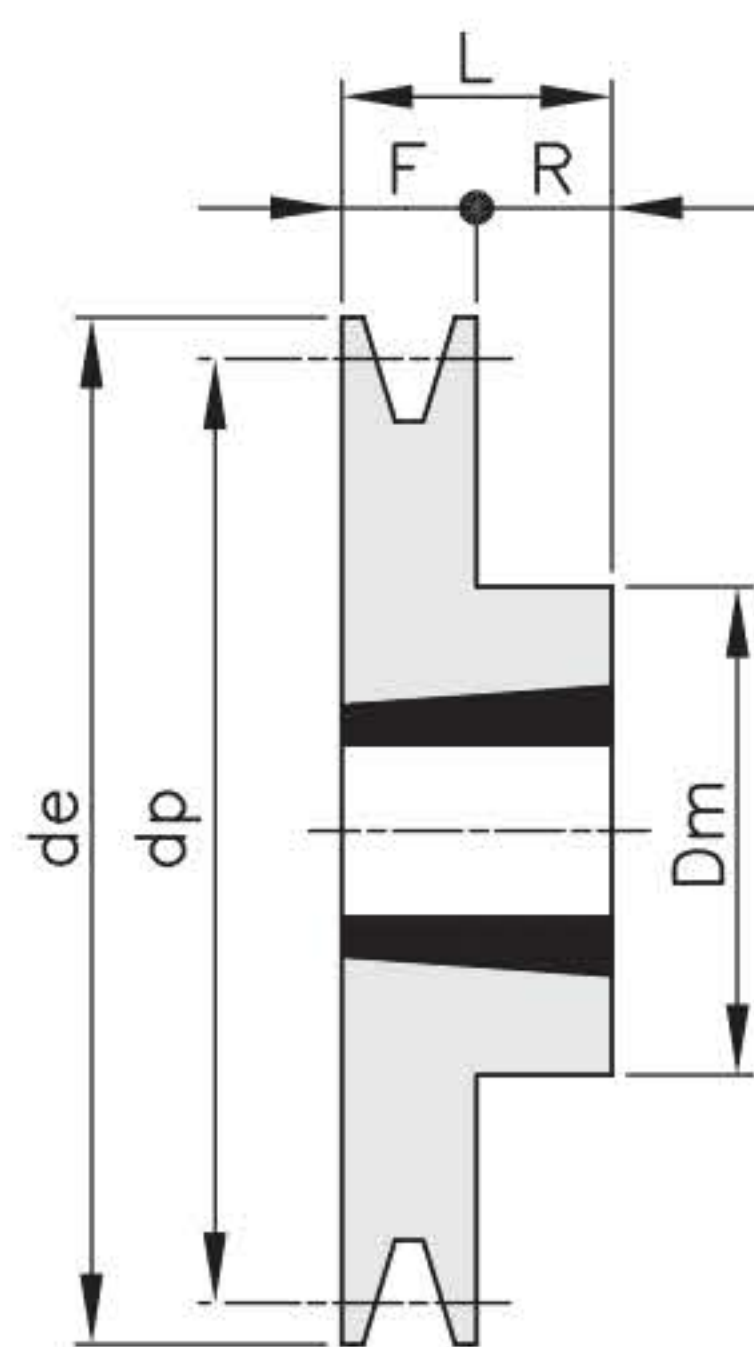


1

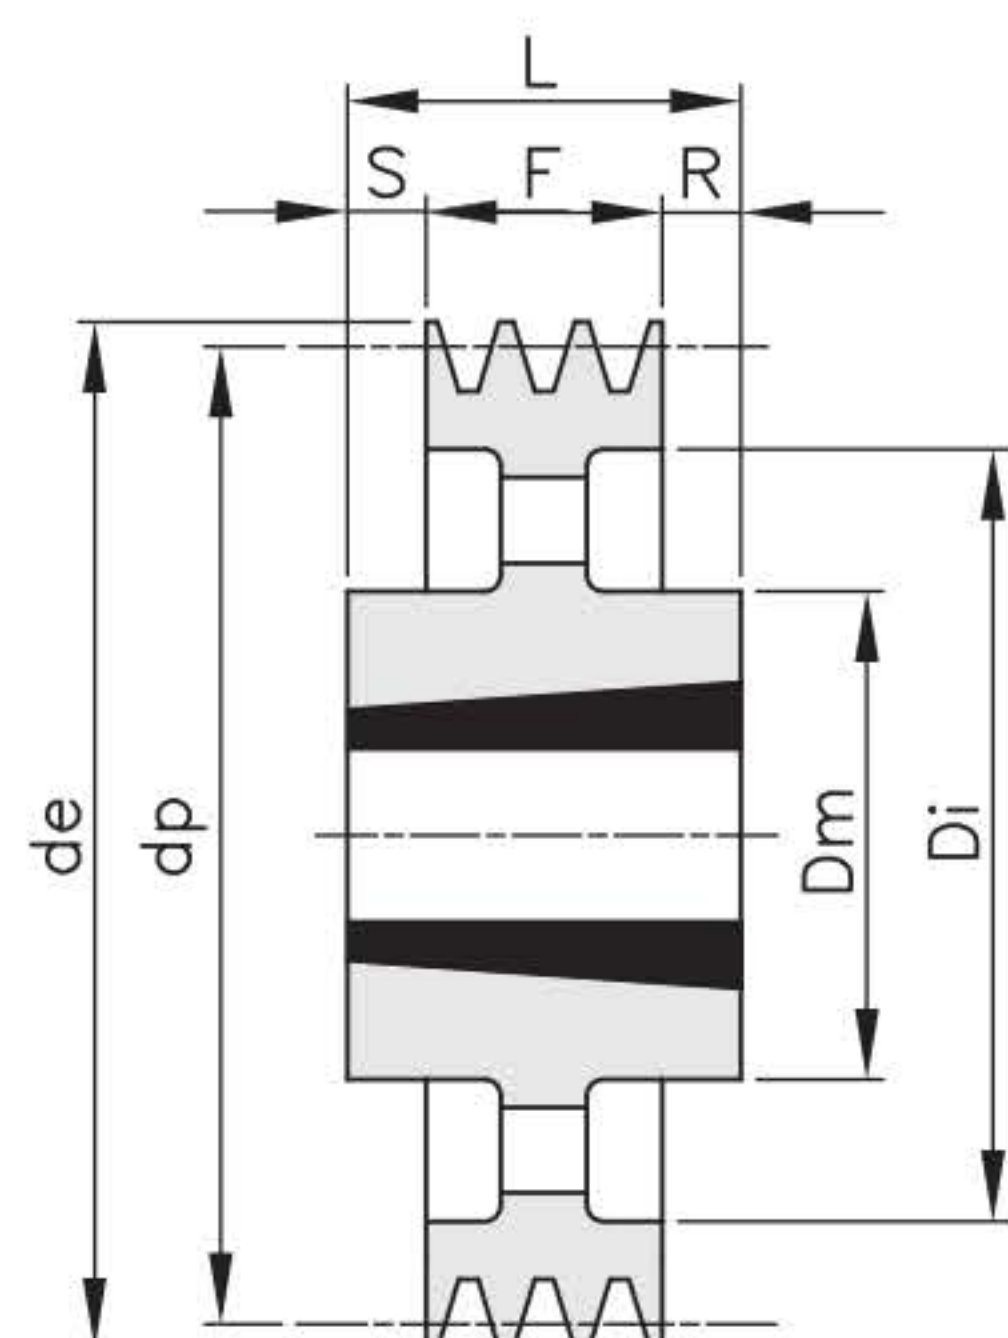

4

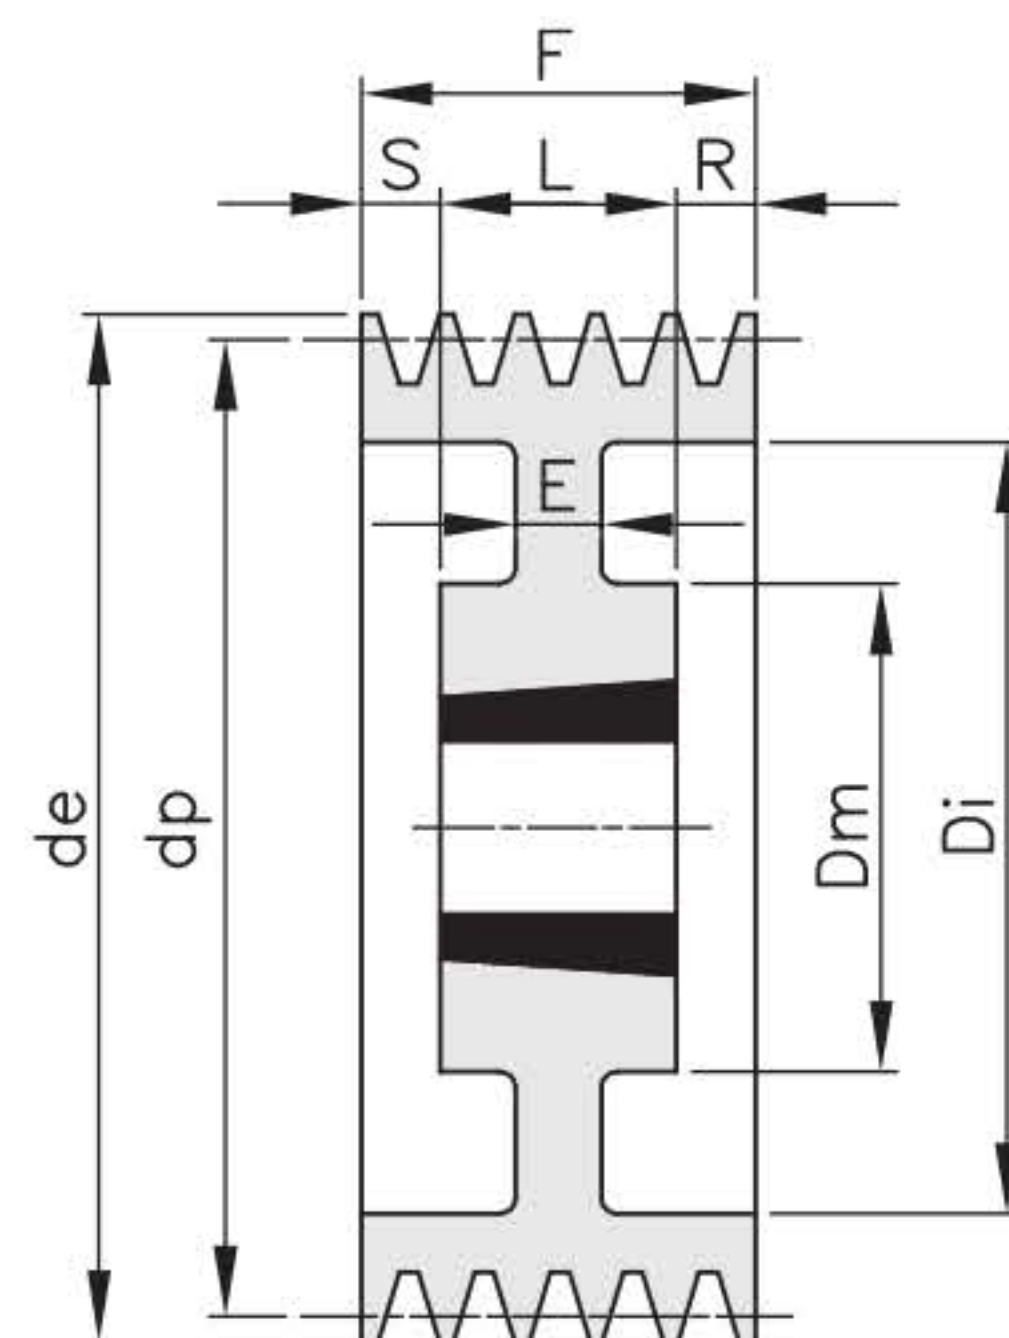


6

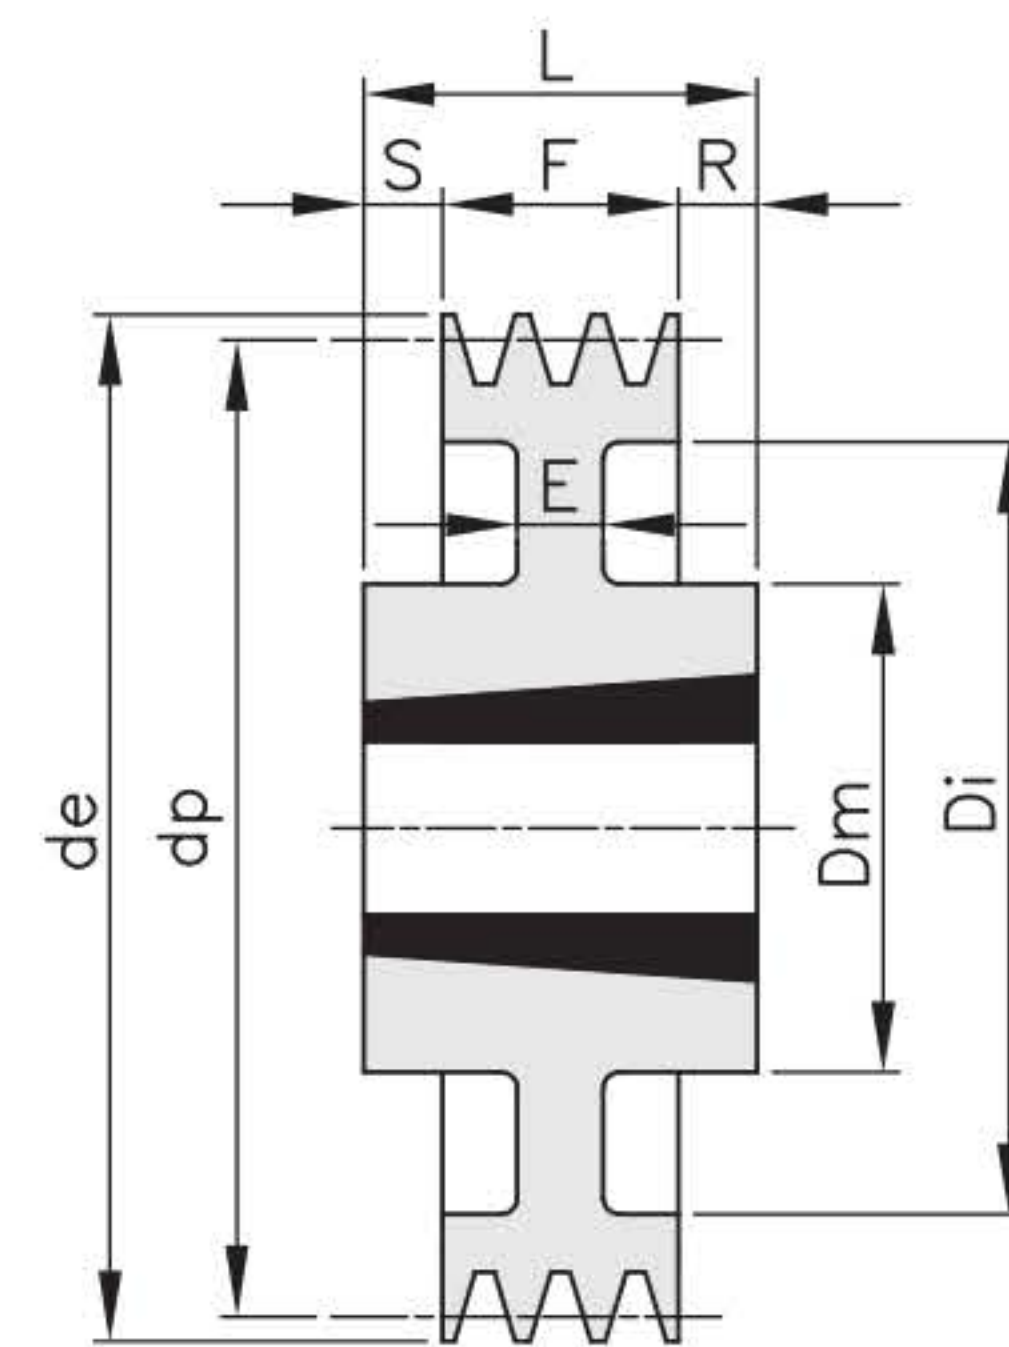

7


codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
100 01 SPB	1	100	107	1	1610	42				25	25			0,90
106 01 SPB	1	106	113	1	1610	42				25	25			1,00
112 01 SPB	1	112	119	1	1610	42				25	25			1,20
118 01 SPB	1	118	125	1	1610	42				25	25			1,30
125 01 SPB	1	125	132	1	1610	42				25	25			1,50
132 01 SPB	1	132	139	1	1610	42				25	25			1,70
140 01 SPB	1	140	147	1	1610	42				25	25			1,80
150 01 SPB	1	150	157	1	1610	42				25	25			2,10
160 01 SPB	1	160	167	1	1610	42				25	25			2,50
170 01 SPB	1	170	177	1	1610	42				25	25			2,90
180 01 SPB	1	180	187	6	1610	42	90	132	12	25	25			3,20
190 01 SPB	1	190	197	7	2012	50	104	147	12	25	32	3,5	3,5	3,80
200 01 SPB	1	200	207	4	2012	50	104	157		25	32	3,5	3,5	4,20
212 01 SPB	1	212	219	4	2012	50	104	169		25	32	3,5	3,5	4,40
224 01 SPB	1	224	231	4	2012	50	104	181		25	32	3,5	3,5	4,70
236 01 SPB	1	236	243	4	2012	50	104	193		25	32	3,5	3,5	4,60
250 01 SPB	1	250	257	4	2012	50	104	207		25	32	3,5	3,5	5,30
280 01 SPB	1	280	287	4	2012	50	104	237		25	32	3,5	3,5	6,00
300 01 SPB	1	300	307	4	2012	50	104	258		25	32	3,5	3,5	6,50
315 01 SPB	1	315	322	4	2012	50	104	272		25	32	3,5	3,5	7,00

SPB - 2

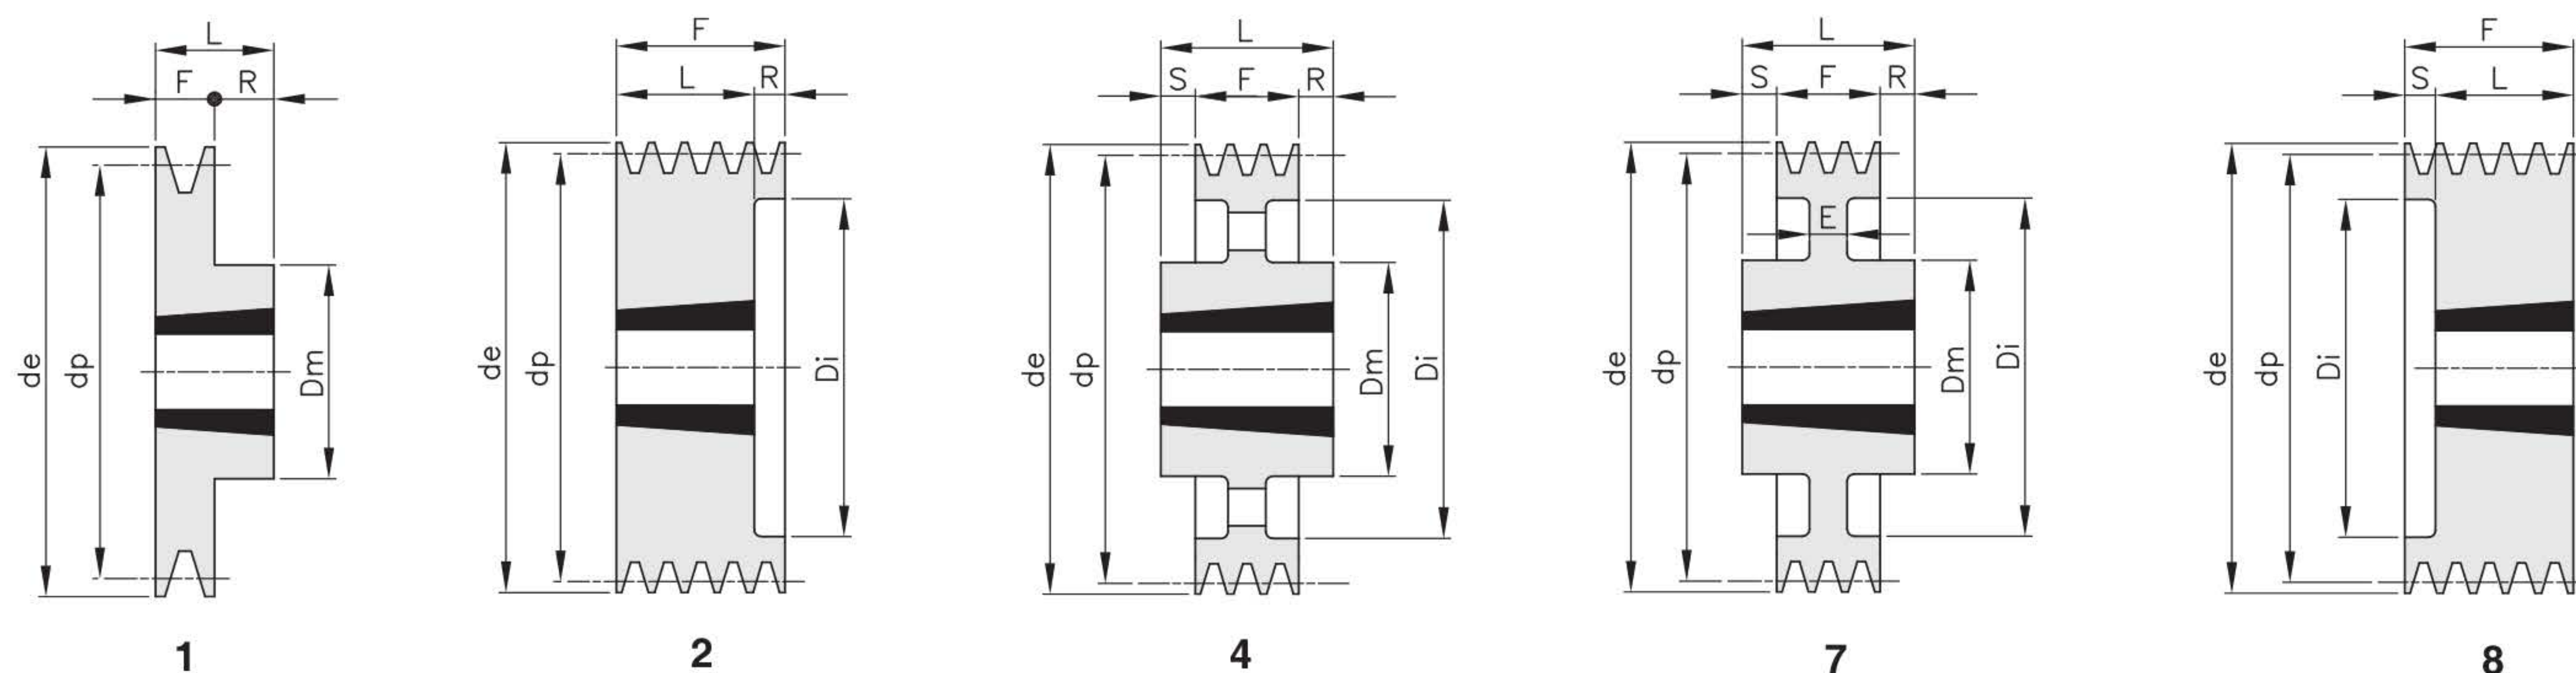


codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
100 02 SPB	2	100	107	8	1610	42		62		44	25		19	1,40
106 02 SPB	2	106	113	8	1610	42		67		44	25		19	1,60
112 02 SPB	2	112	119	8	1610	42		72		44	25		19	1,70
118 02 SPB	2	118	125	2	1610	42		78		44	25	19		1,80
125 02 SPB	2	125	132	2	2012	50		82		44	32	12		1,90
132 02 SPB	2	132	139	2	2012	50		89		44	32	12		2,50
140 02 SPB	2	140	147	2	2012	50		97		44	32	12		2,70
150 02 SPB	2	150	157	2	2012	50		107		44	32	12		3,20
160 02 SPB	2	160	167	2	2012	50		117		44	32	12		3,80
170 02 SPB	2	170	177	2	2012	50		127		44	32	12		4,80
180 02 SPB	2	180	187	1	2517	65	120			44	45	1		6,30
190 02 SPB	2	190	197	1	2517	65	120			44	45	1		7,20
200 02 SPB	2	200	207	1	2517	65	117			44	45	1		8,20
212 02 SPB	2	212	219	7	2517	65	117	169	15	44	45	1		5,40
224 02 SPB	2	224	231	4	2517	65	117	181		44	45	1		5,90
236 02 SPB	2	236	243	4	2517	65	117	193		44	45	1		6,60
250 02 SPB	2	250	257	4	2517	65	125	207		44	45	1		7,10
280 02 SPB	2	280	287	4	2517	65	125	237		44	45	1		7,40
300 02 SPB	2	300	307	4	2517	65	125	257		44	45	1		8,60
315 02 SPB	2	315	322	4	2517	65	125	272		44	45	1		9,90
335 02 SPB	2	335	342	4	2517	65	125	292		44	45	1		11,30
355 02 SPB	2	355	362	4	3020	75	144	312		44	51	3,5	3,5	12,00
400 02 SPB	2	400	407	4	3020	75	150	357		44	51	3,5	3,5	13,00
450 02 SPB	2	450	457	4	3020	75	150	407		44	51	3,5	3,5	13,50
500 02 SPB	2	500	507	4	3020	75	150	457		44	51	3,5	3,5	15,00
560 02 SPB	2	560	567	4	3030	75	150	517		44	76	28	4	17,00
630 02 SPB	2	630	637	4	3030	75	150	587		44	76	16	16	19,30


SPB - 3

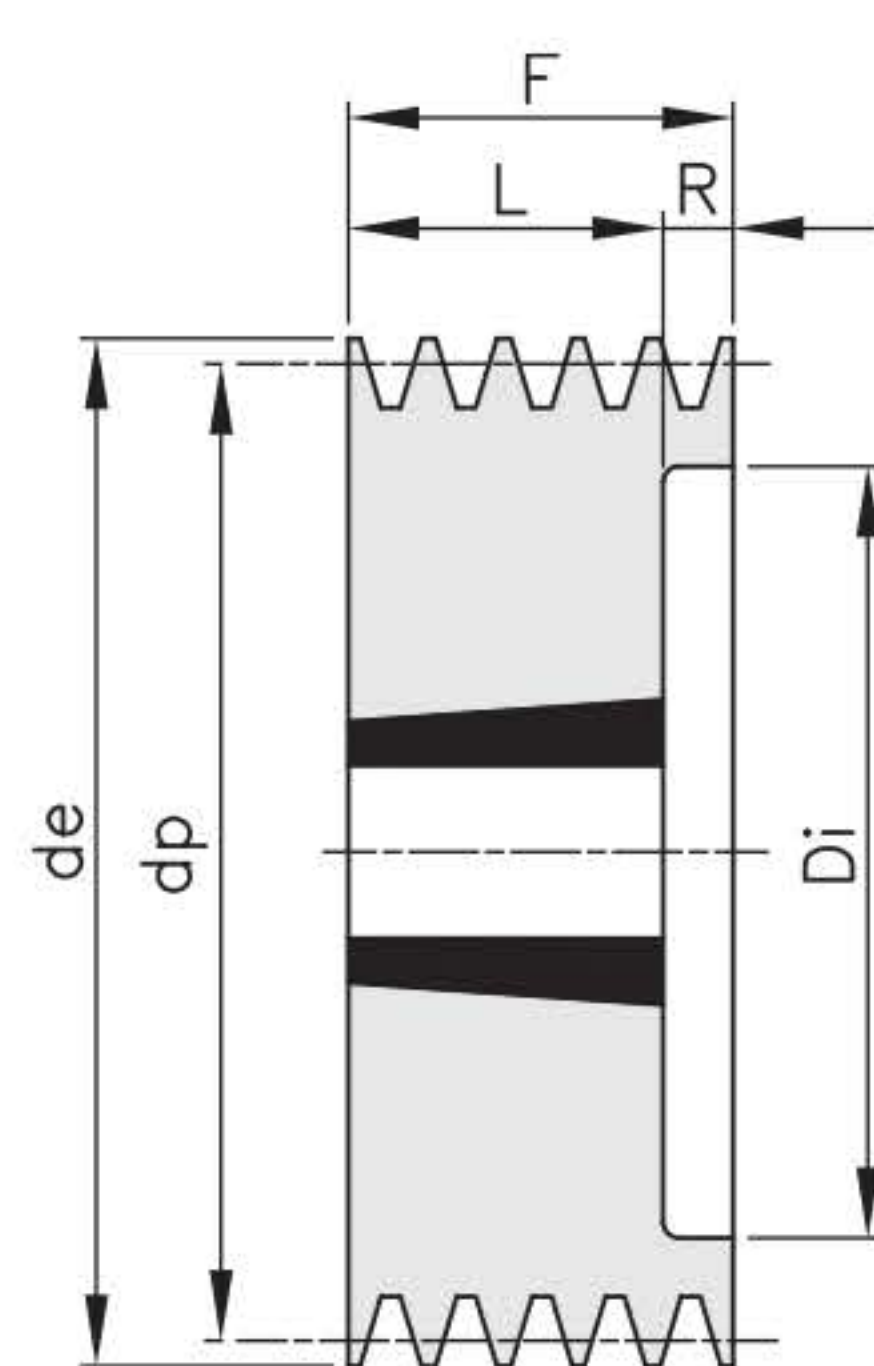


2

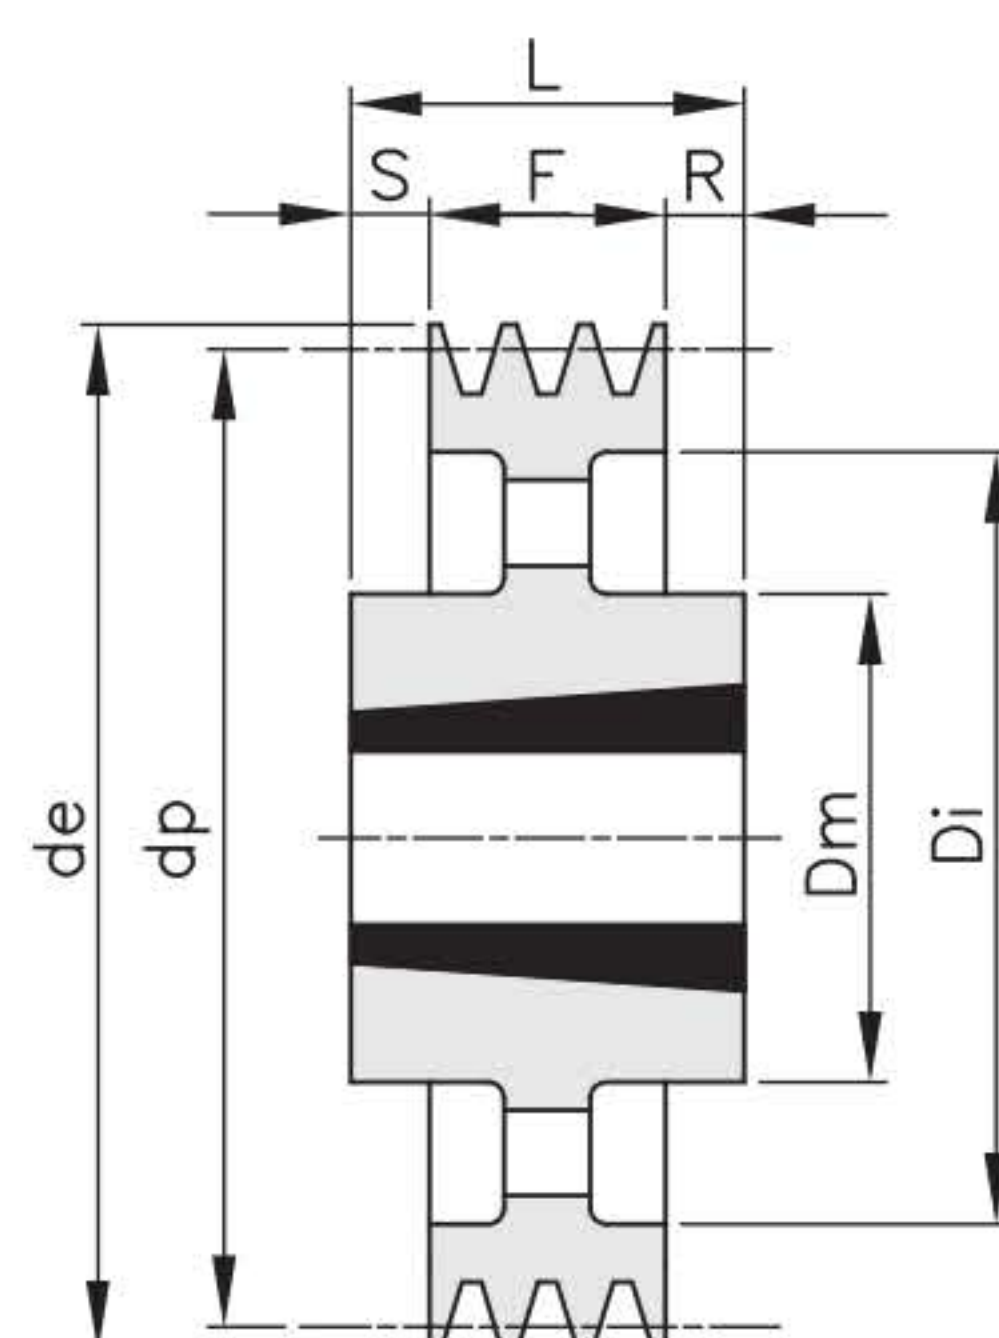

4

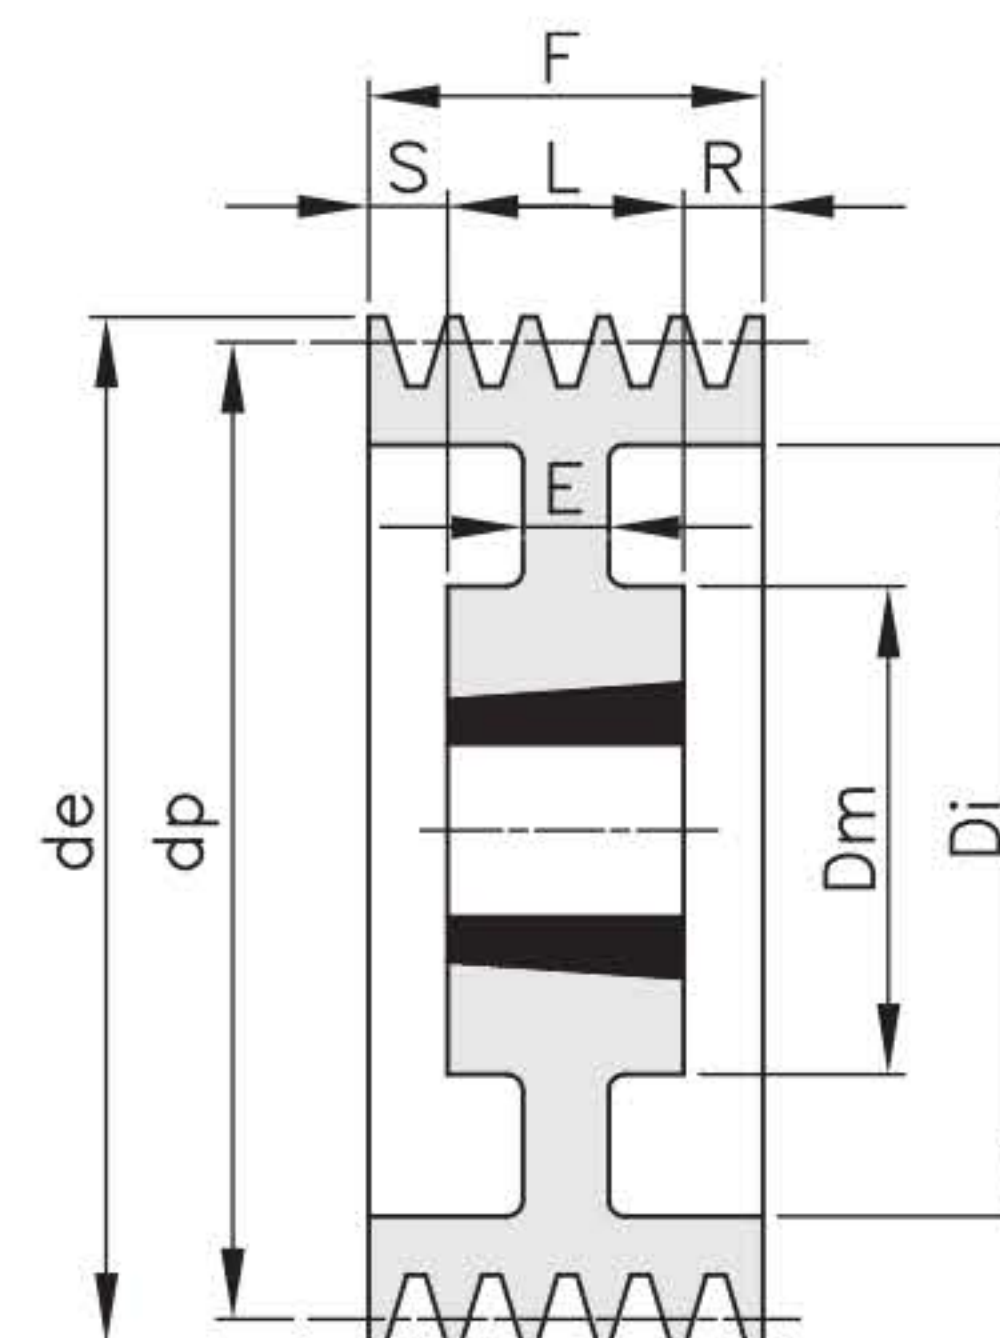


6

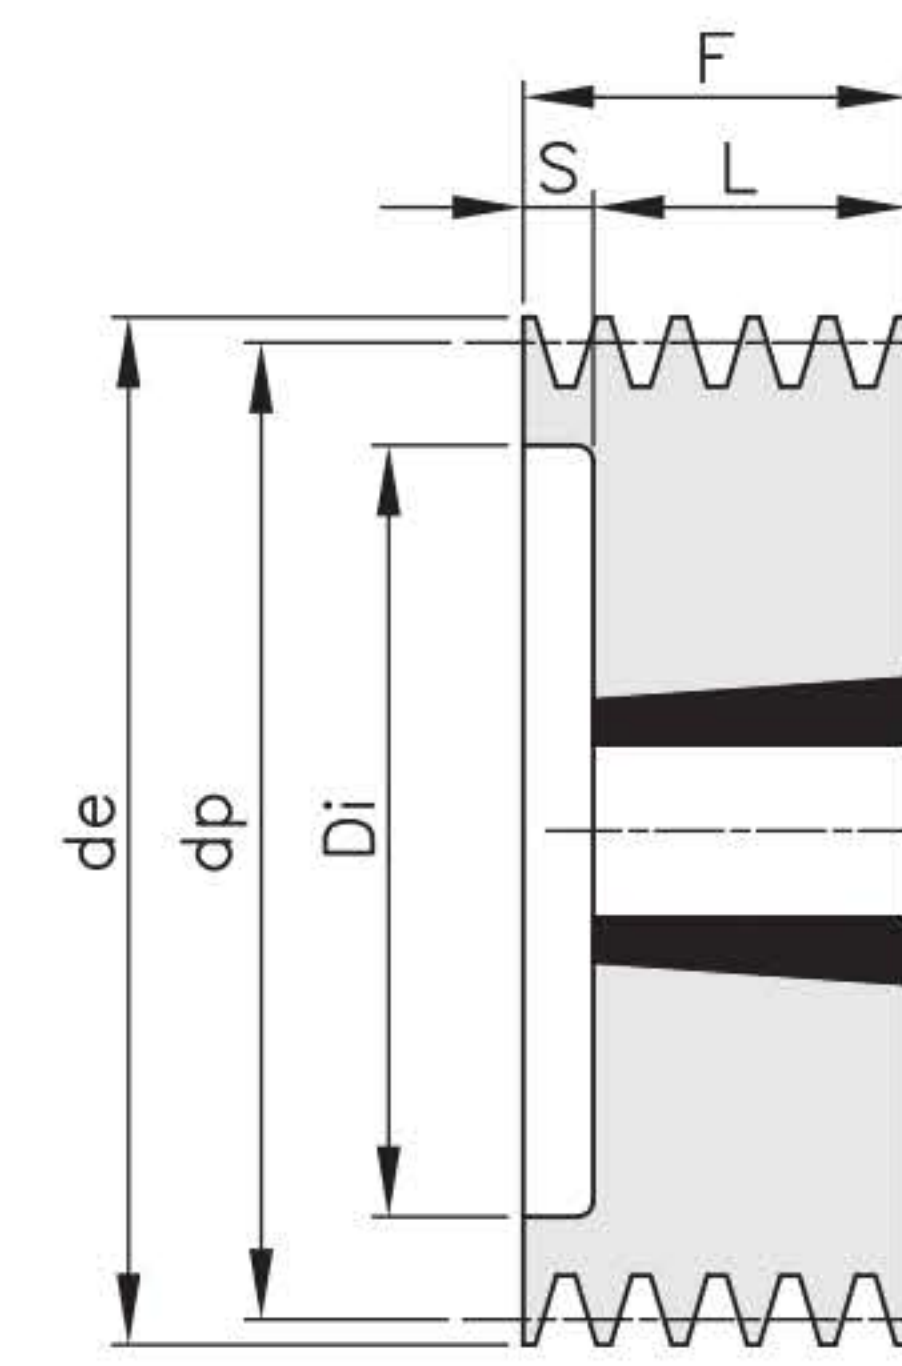


8

codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
100 03 SPB	3	100	107	8	1610	42		62		63	25		38	1,90
106 03 SPB	3	106	113	8	1610	42		67		63	25		38	2,20
112 03 SPB	3	112	119	8	1610	42		72		63	25		38	2,40
118 03 SPB	3	118	125	2	1610	42		78		63	25	38		2,60
125 03 SPB	3	125	132	2	2012	50		82		63	32	31		3,20
132 03 SPB	3	132	139	2	2012	50		89		63	32	31		3,20
140 03 SPB	3	140	147	2	2012	50		97		63	32	31		3,60
150 03 SPB	3	150	157	2	2517	65		107		63	45	18		4,00
160 03 SPB	3	160	167	2	2517	65		117		63	45	18		4,50
170 03 SPB	3	170	177	2	2517	65		127		63	45	18		5,30
180 03 SPB	3	180	187	2	2517	65		137		63	45	18		5,90
190 03 SPB	3	190	197	2	2517	65		147		63	45	18		6,50
200 03 SPB	3	200	207	2	2517	65		157		63	45	18		6,70
212 03 SPB	3	212	219	6	2517	65	117	169	15	63	45	18		6,90
224 03 SPB	3	224	231	4	2517	65	117	181		63	45	18		7,50
236 03 SPB	3	236	243	4	2517	65	117	193		63	45	18		8,80
250 03 SPB	3	250	257	4	3020	75	144	207		63	51	12		10,20
280 03 SPB	3	280	287	4	3020	75	144	237		63	51	6	6	11,30
300 03 SPB	3	300	307	4	3020	75	144	257		63	51	6	6	12,30
315 03 SPB	3	315	322	4	3020	75	144	272		63	51	6	6	13,50
335 03 SPB	3	335	342	4	3020	75	144	292		63	51	6	6	14,70
355 03 SPB	3	355	362	4	3020	75	144	312		63	51	6	6	15,90
400 03 SPB	3	400	407	4	3535	90	175	357		63	89	13	13	18,80
450 03 SPB	3	450	457	4	3535	90	175	407		63	89	26		22,50
500 03 SPB	3	500	507	4	3535	90	175	457		63	89	26		24,00
560 03 SPB	3	560	567	4	3535	90	175	517		63	89	26		30,00
630 03 SPB	3	630	637	4	3535	90	175	587		63	89	26		33,50
710 03 SPB	3	710	717	4	3535	90	175	664		63	89	13	13	35,00
800 03 SPB	3	800	807	4	3535	90	175	754		63	89	13	13	38,00
900 03 SPB	3	900	907	4	3535	90	175	854		63	89	13	13	48,00
1000 03 SPB	3	1000	1007	4	4040	100	210	954		63	102	19,5	19,5	55,00
1250 03 SPB	3	1250	1257	4	4040	100	210	1204		63	102	19,5	19,5	100,00


SPB - 4

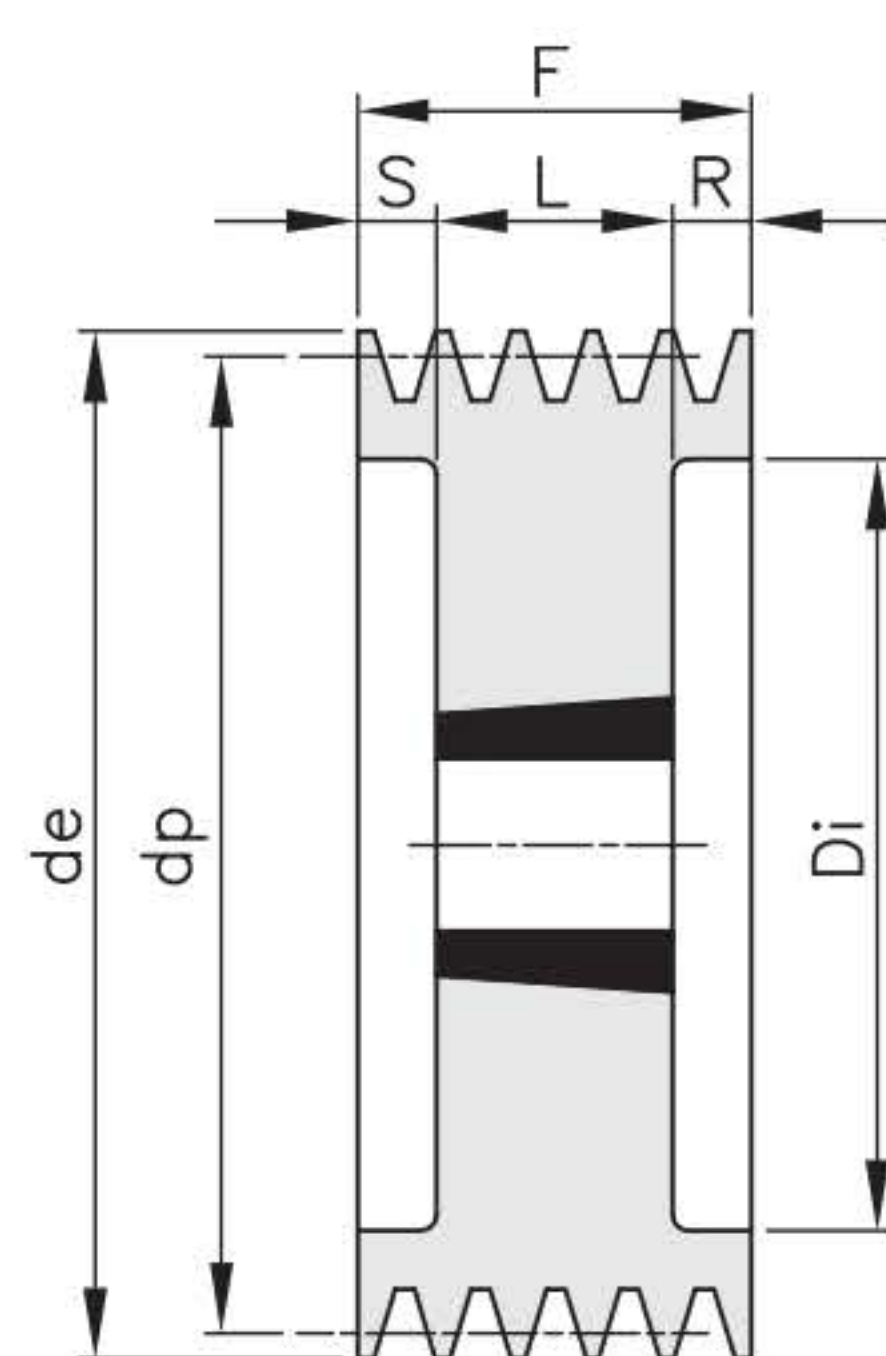

3

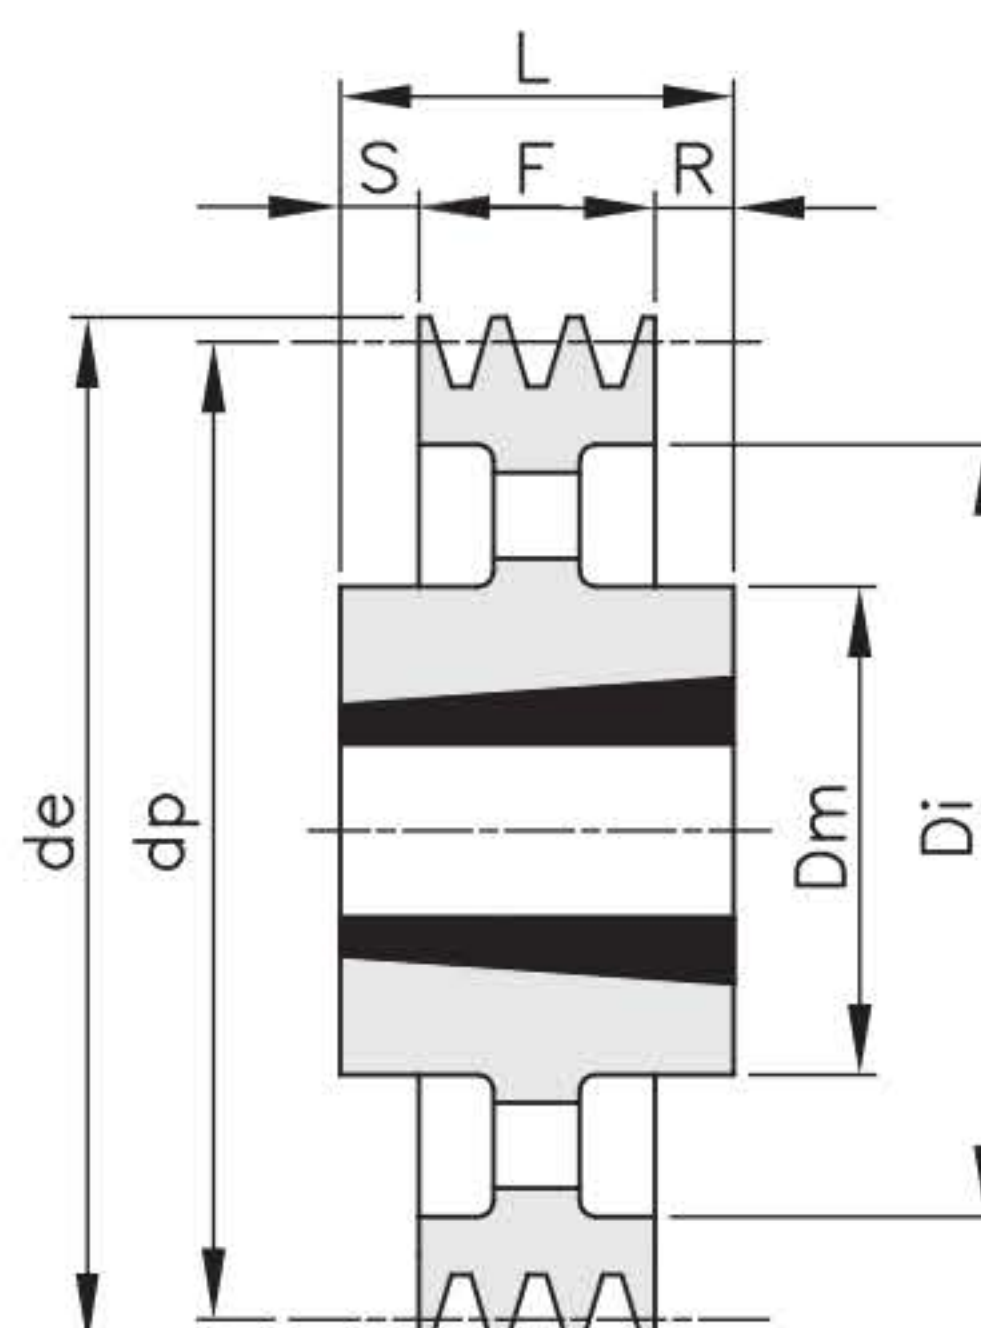


4

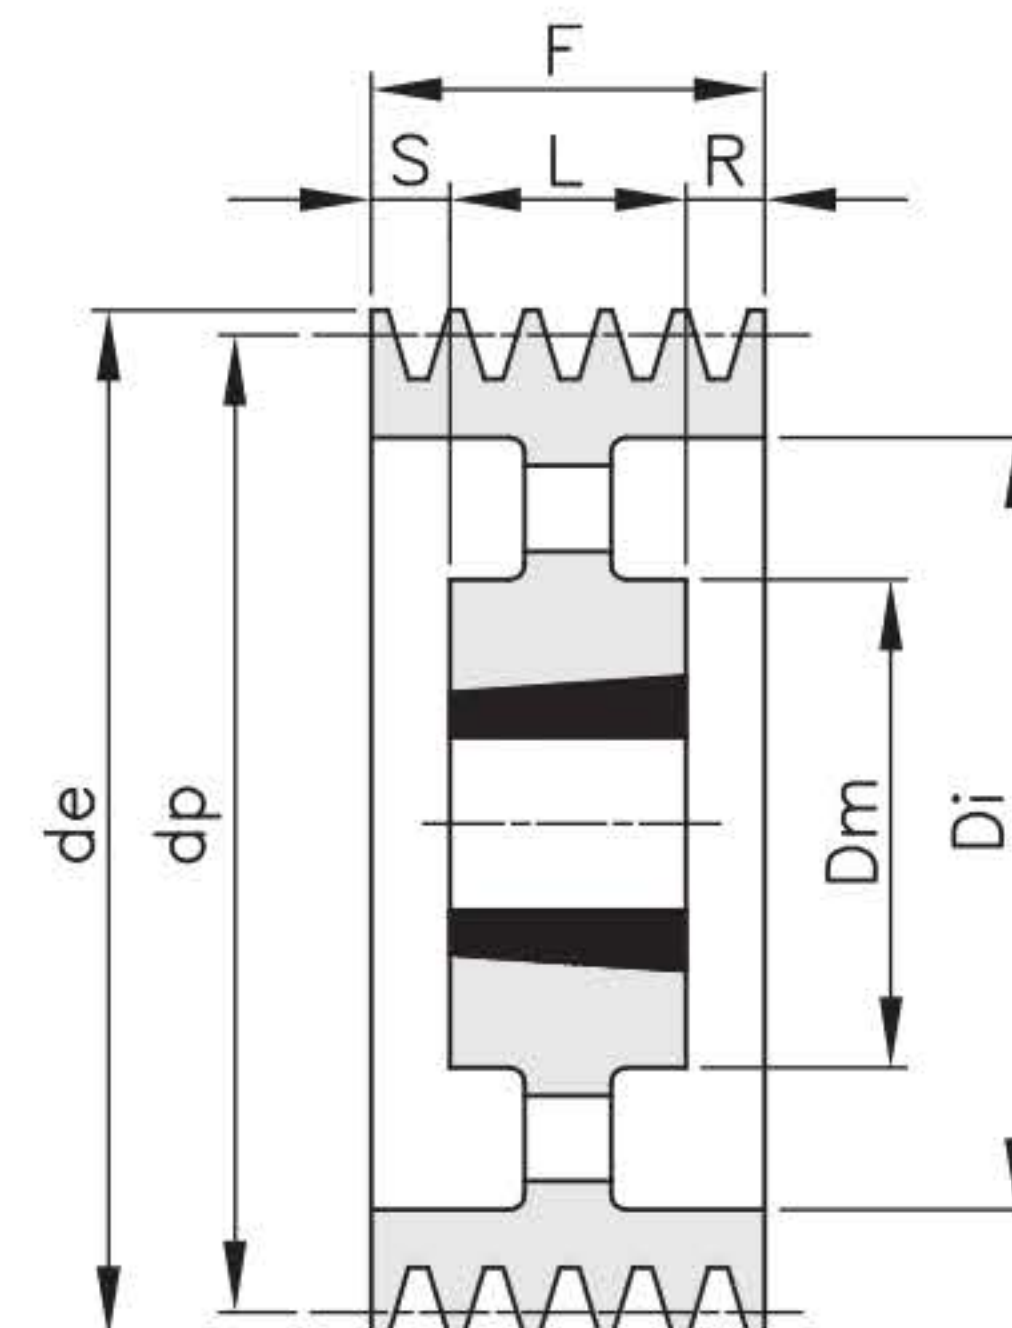

5


codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
125 04 SPB	4	125	132	3	2012	50		82		82	32	25	25	3,50
132 04 SPB	4	132	139	3	2012	50		89		82	32	25	25	3,70
140 04 SPB	4	140	147	3	2517	65		100		82	45	18,5	18,5	4,30
150 04 SPB	4	150	157	3	2517	65		107		82	45	18,5	18,5	4,60
160 04 SPB	4	160	167	3	2517	65		117		82	45	18,5	18,5	5,20
170 04 SPB	4	170	177	3	2517	65		127		82	45	18,5	18,5	6,10
180 04 SPB	4	180	187	3	2517	65		137		82	45	18,5	18,5	7,20
190 04 SPB	4	190	197	3	2517	65		147		82	45	18,5	18,5	7,90
200 04 SPB	4	200	207	3	3020	75		157		82	51	15,5	15,5	9,10
212 04 SPB	4	212	219	3	3020	75		169		82	51	15,5	15,5	10,00
224 04 SPB	4	224	231	3	3020	75		181		82	51	15,5	15,5	11,50
236 04 SPB	4	236	243	3	3020	75		193		82	51	15,5	15,5	12,80
250 04 SPB	4	250	257	5	3020	75	144	207		82	51	15,5	15,5	13,50
280 04 SPB	4	280	287	5	3020	75	144	237		82	51	15,5	15,5	14,10
300 04 SPB	4	300	307	4	3535	90	175	257		82	89	7		15,80
315 04 SPB	4	315	322	4	3535	90	175	272		82	89	3,5	3,5	17,50
335 04 SPB	4	335	342	4	3535	90	175	292		82	89	3,5	3,5	18,40
355 04 SPB	4	355	362	4	3535	90	175	312		82	89	3,5	3,5	19,20
400 04 SPB	4	400	407	4	3535	90	175	357		82	89	3,5	3,5	21,00
450 04 SPB	4	450	457	4	3535	90	175	407		82	89	7		25,00
500 04 SPB	4	500	507	4	3535	90	175	457		82	89	7		27,00
560 04 SPB	4	560	567	4	3535	90	175	517		82	89	7		33,20
630 04 SPB	4	630	637	4	3535	90	175	587		82	89	7		36,00
710 04 SPB	4	710	717	4	3535	90	175	664		82	89	3,5	3,5	42,00
800 04 SPB	4	800	807	4	4040	100	210	754		82	102	10	10	53,50
900 04 SPB	4	900	907	4	4040	100	210	854		82	102	10	10	62,00
1000 04 SPB	4	1000	1007	4	4040	100	210	954		82	102	16	10	68,00
1250 04 SPB	4	1250	1257	4	4545	110	242	1204		82	114	16	16	114,50

SPB - 5

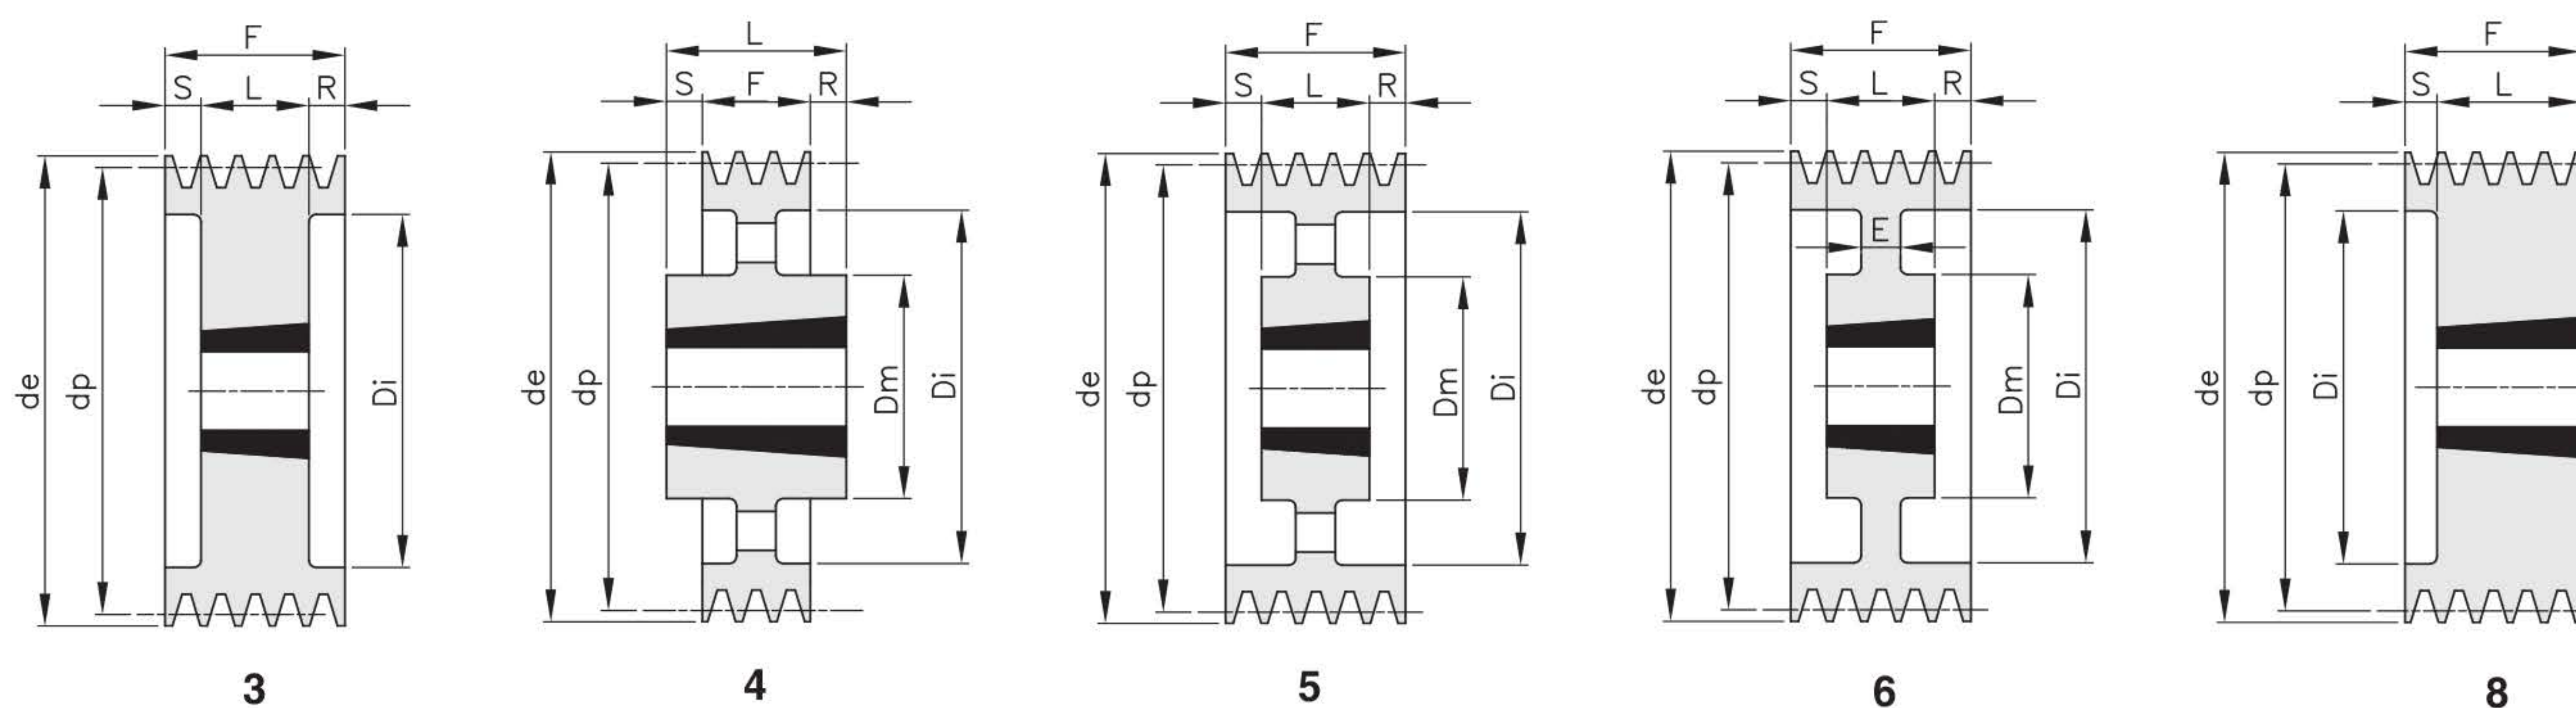


codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
125 05 SPB	5	125	132	8	2012	50		87		101	32		69	4,20
132 05 SPB	5	132	139	8	2517	65		94		101	45		56	4,40
140 05 SPB	5	140	147	3	2517	65		97		101	45	28	28	4,80
150 05 SPB	5	150	157	3	2517	65		107		101	45	28	28	5,40
160 05 SPB	5	160	167	3	2517	65		117		101	45	28	28	6,20
170 05 SPB	5	170	177	3	3020	75		127		101	51	25	25	7,10
180 05 SPB	5	180	187	3	3020	75		137		101	51	25	25	7,50
190 05 SPB	5	190	197	3	3020	75		147		101	51	25	25	8,50
200 05 SPB	5	200	207	3	3020	75		157		101	51	25	25	9,60
212 05 SPB	5	212	219	3	3020	75		169		101	51	25	25	11,50
224 05 SPB	5	224	231	3	3020	75		181		101	51	25	25	13,00
236 05 SPB	5	236	243	3	3535	90		193		101	89	6	6	16,20
250 05 SPB	5	250	257	3	3535	90		207		101	89	6	6	17,20
280 05 SPB	5	280	287	6	3535	90	175	237	25	101	89	6	6	18,50
300 05 SPB	5	300	307	5	3535	90	175	257		101	89	6	6	19,00
315 05 SPB	5	315	322	5	3535	90	175	272		101	89	6	6	19,50
335 05 SPB	5	335	342	5	3535	90	175	292		101	89	6	6	20,40
355 05 SPB	5	355	362	4	3535	90	175	312		101	89	6	6	21,50
400 05 SPB	5	400	407	4	3535	90	175	357		101	89	6	6	24,50
450 05 SPB	5	450	457	4	3535	90	175	407		101	89	12		29,00
500 05 SPB	5	500	507	4	3535	90	175	457		101	89	12		31,50
560 05 SPB	5	560	567	4	4040	100	210	517		101	102	1		36,00
630 05 SPB	5	630	637	4	4040	100	210	587		101	102	1		48,50
710 05 SPB	5	710	717	4	4040	100	210	664		101	102	1		52,00
800 05 SPB	5	800	807	4	4040	100	210	754		101	102	1		56,20
900 05 SPB	5	900	907	4	4040	100	210	854		101	102	1		76,00
1000 05 SPB	5	1000	1007	4	4545	110	242	954		101	114	6,5	6,5	85,30
1250 05 SPB	5	1250	1257	4	4545	110	242	1204		101	114	6,5	6,5	150,70


SPB - 6

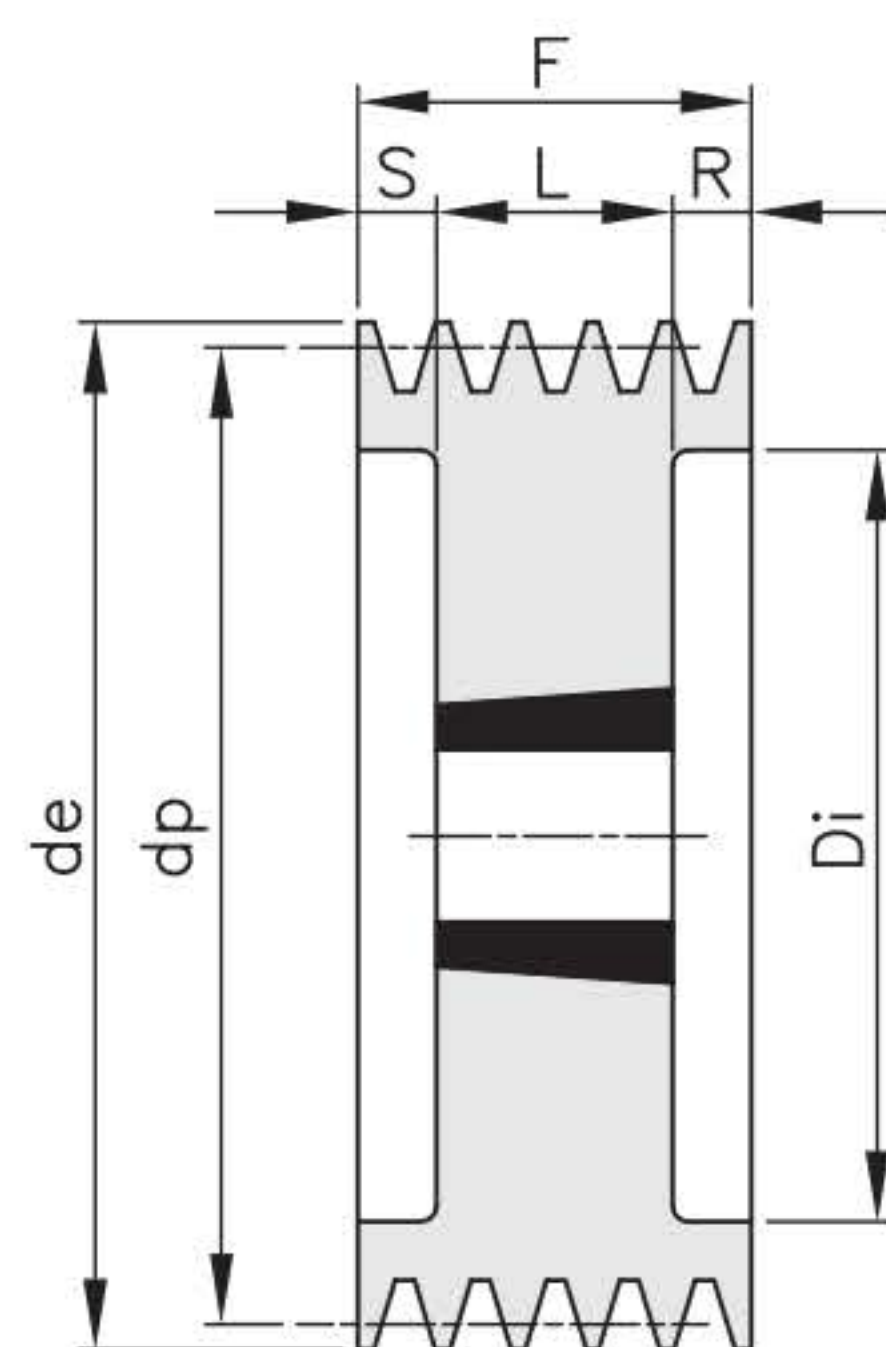

3

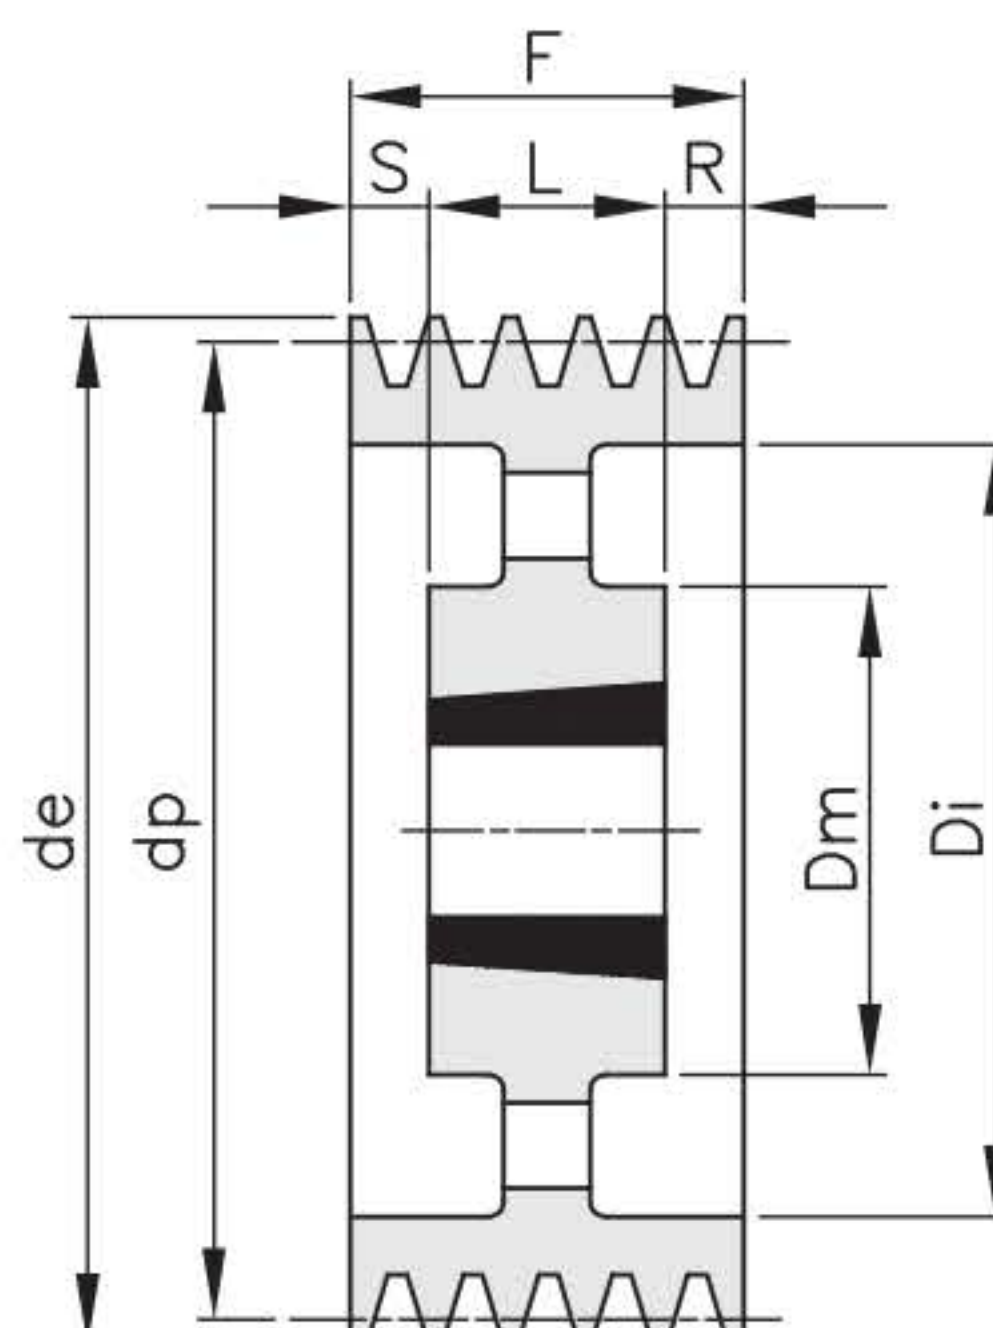


5

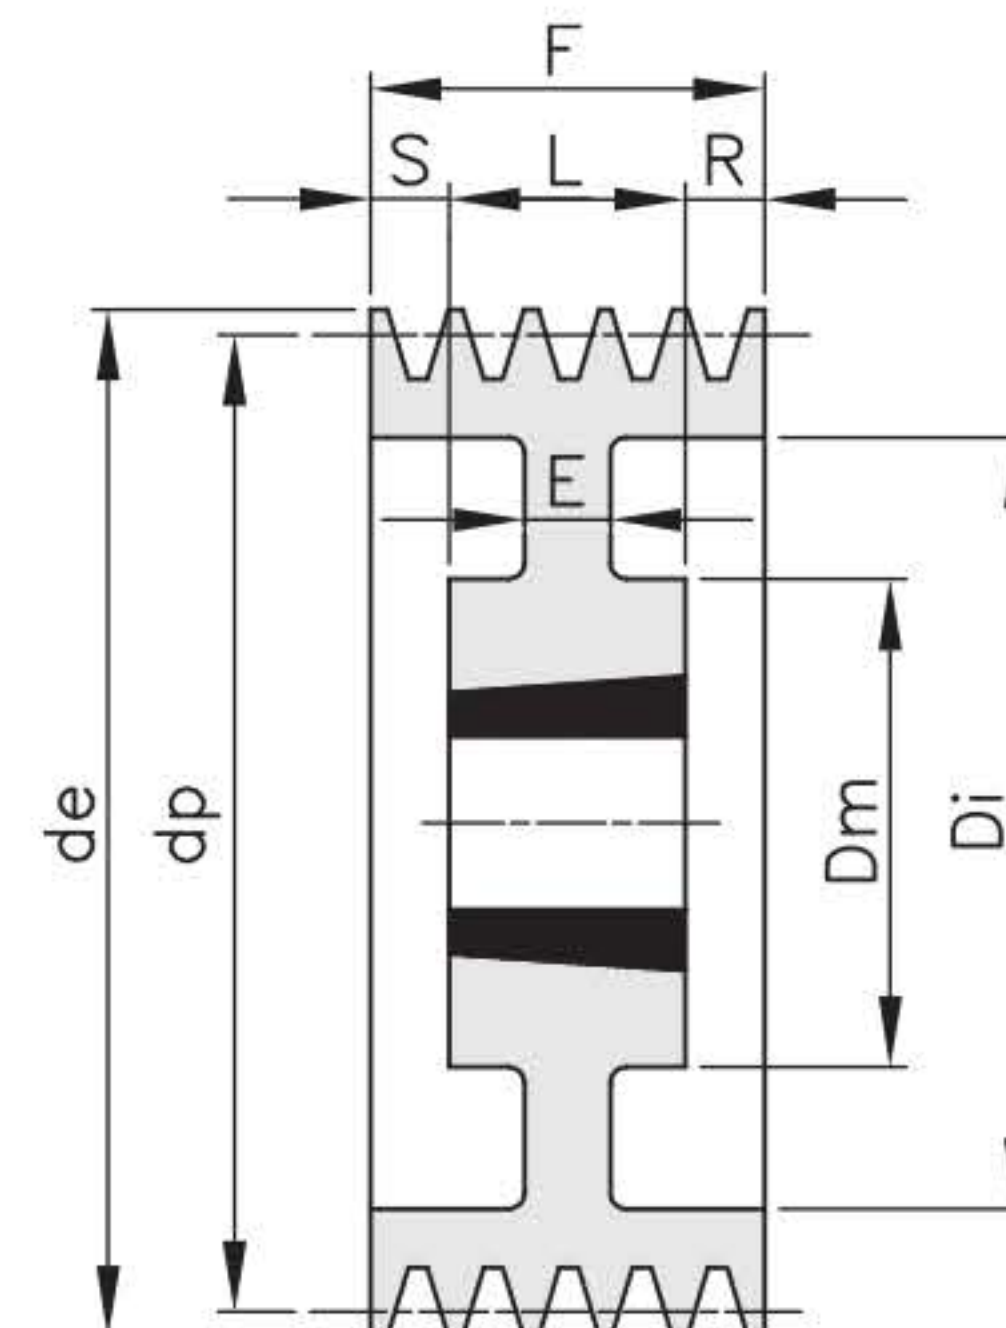


6

codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
140 06 SPB	6	140	147	3	2517	65		100		120	45	37,5	37,5	5,80
150 06 SPB	6	150	157	3	2517	65		107		120	45	37,5	37,5	6,80
160 06 SPB	6	160	167	3	3020	75		118		120	51	34,5	34,5	6,90
170 06 SPB	6	170	177	3	3020	75		127		120	51	34,5	34,5	8,10
180 06 SPB	6	180	187	3	3020	75		137		120	51	34,5	34,5	8,20
190 06 SPB	6	190	197	3	3020	75		147		120	51	34,5	34,5	9,40
200 06 SPB	6	200	207	3	3020	75		157		120	51	34,5	34,5	10,50
212 06 SPB	6	212	219	3	3535	90		169		120	89	15,5	15,5	14,50
224 06 SPB	6	224	231	3	3535	90		181		120	89	15,5	15,5	17,50
236 06 SPB	6	236	243	3	3535	90		193		120	89	15,5	15,5	20,00
250 06 SPB	6	250	257	3	3535	90		207		120	89	15,5	15,5	21,50
280 06 SPB	6	280	287	6	3535	90	175	237	25	120	89	15,5	15,5	22,10
300 06 SPB	6	300	307	5	3535	90	175	257		120	89	15,5	15,5	23,50
315 06 SPB	6	315	322	5	3535	90	175	272		120	89	15,5	15,5	24,60
335 06 SPB	6	335	342	5	3535	90	175	292		120	89	15,5	15,5	26,30
355 06 SPB	6	355	362	5	3535	90	175	312		120	89	15,5	15,5	28,40
400 06 SPB	6	400	407	5	3535	90	175	357		120	89	15,5	15,5	32,90
450 06 SPB	6	450	457	5	4040	100	210	407		120	102	18		36,50
500 06 SPB	6	500	507	5	4040	100	210	457		120	102	18		40,00
560 06 SPB	6	560	567	5	4040	100	210	517		120	102	18		47,50
630 06 SPB	6	630	637	5	4040	100	210	587		120	102	18		55,00
710 06 SPB	6	710	717	5	4040	100	210	664		120	102	9	9	62,50
800 06 SPB	6	800	807	5	4545	110	242	754		120	114	3	3	71,00
900 06 SPB	6	900	907	5	4545	110	242	854		120	114	3	3	83,70
1000 06 SPB	6	1000	1007	5	4545	110	242	954		120	114	3	3	100,40
1250 06 SPB	6	1250	1257	5	4545	110	242	1204		120	114	3	3	136,00


SPB - 8

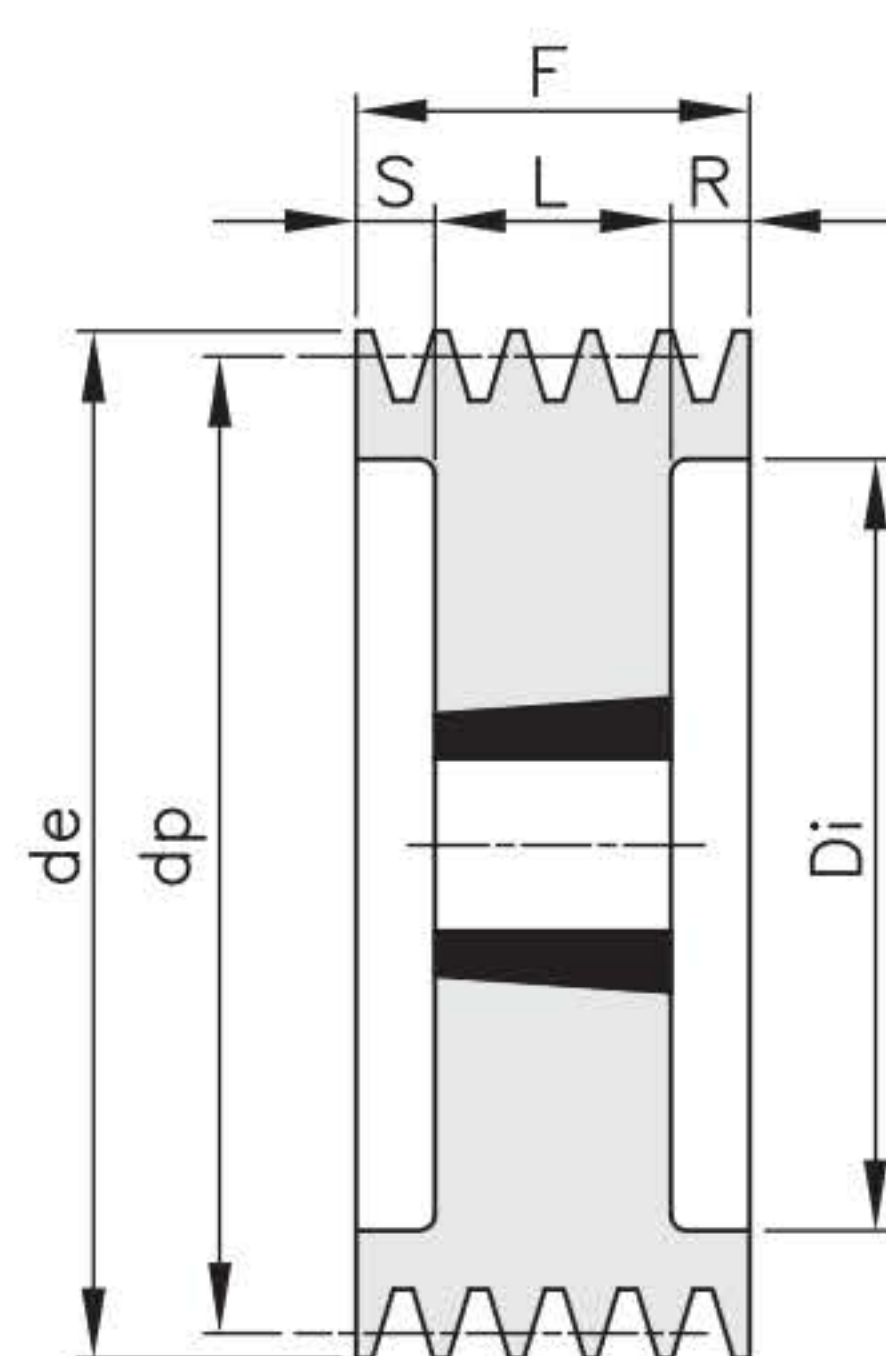

3

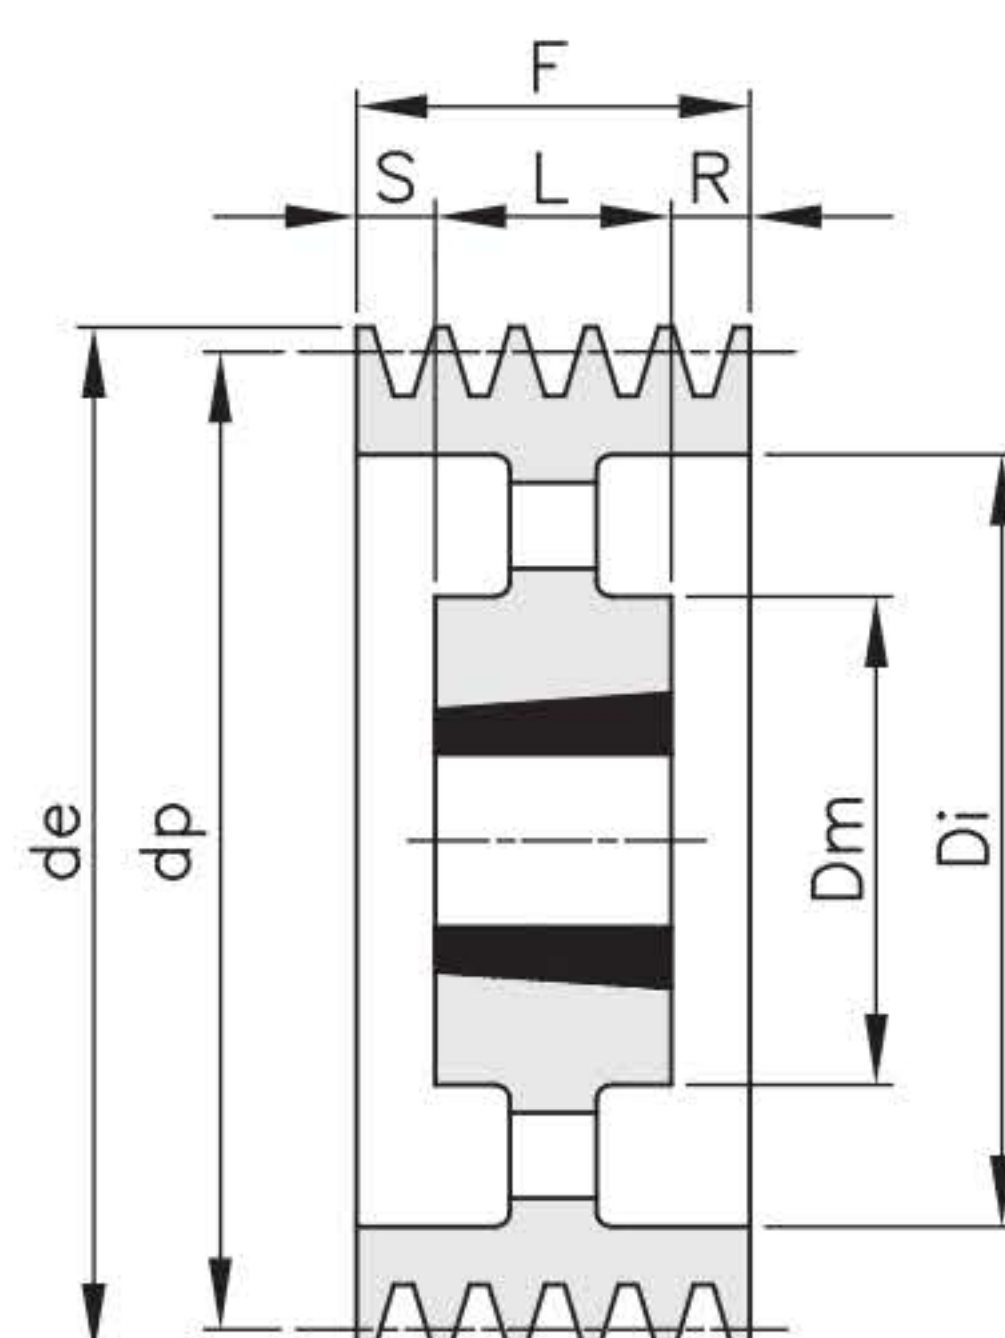


5

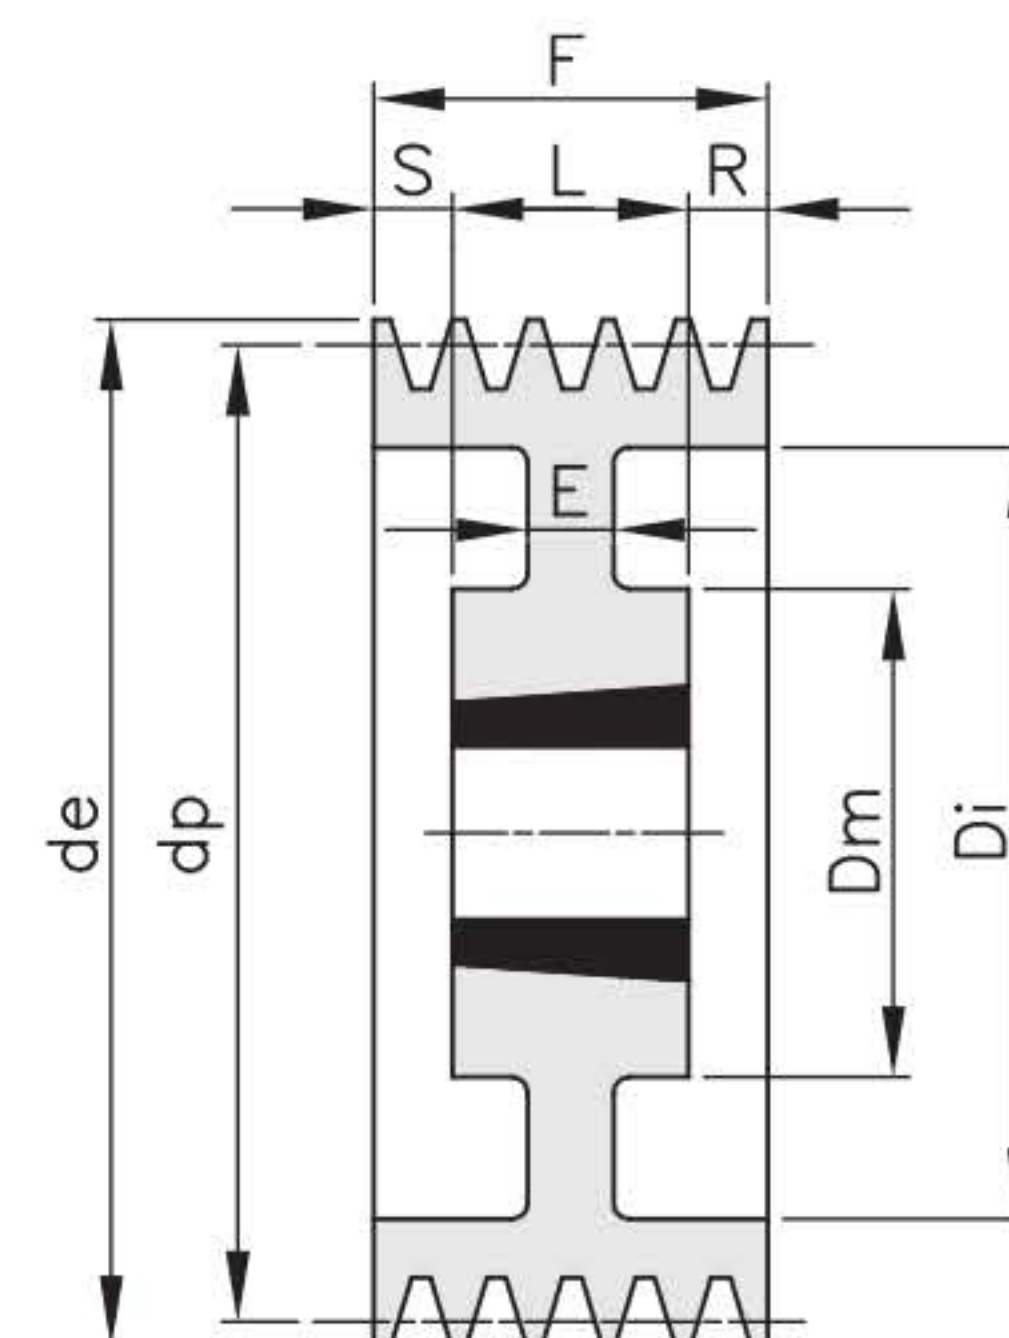


6

codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
140 08 SPB	8	140	147	3	2517	65		97		158	45	56,5	56,5	7,00
150 08 SPB	8	150	157	3	2517	65		107		158	45	56,5	56,5	8,00
160 08 SPB	8	160	167	3	3020	75		118		158	51	53,5	53,5	11,60
170 08 SPB	8	170	177	3	3030	75		127		158	76	41	41	12,50
180 08 SPB	8	180	187	3	3030	75		137		158	76	41	41	13,70
190 08 SPB	8	190	197	3	3030	75		147		158	76	41	41	15,60
200 08 SPB	8	200	207	3	3535	90		157		158	89	34,5	34,5	17,60
212 08 SPB	8	212	219	3	3535	90		169		158	89	34,5	34,5	20,50
224 08 SPB	8	224	231	3	3535	90		181		158	89	34,5	34,5	22,50
236 08 SPB	8	236	243	3	3535	90		193		158	89	34,5	34,5	24,00
250 08 SPB	8	250	257	3	3535	90		207		158	89	34,5	34,5	26,50
280 08 SPB	8	280	287	6	3535	90	175	237	25	158	89	34,5	34,5	28,00
300 08 SPB	8	300	307	6	3535	90	175	257	25	158	89	34,5	34,5	30,10
315 08 SPB	8	315	322	5	3535	90	175	272		158	89	34,5	34,5	31,20
335 08 SPB	8	335	342	5	3535	90	175	292		158	89	34,5	34,5	33,50
355 08 SPB	8	355	362	5	3535	90	175	312		158	89	34,5	34,5	35,70
400 08 SPB	8	400	407	5	4040	100	210	357		158	102	28	28	37,00
450 08 SPB	8	450	457	5	4040	100	210	407		158	102	28	28	42,00
500 08 SPB	8	500	507	5	4040	100	210	457		158	102	28	28	46,50
560 08 SPB	8	560	567	5	4545	110	242	517		158	114	22	22	58,00
630 08 SPB	8	630	637	5	4545	110	242	587		158	114	22	22	64,00
710 08 SPB	8	710	717	5	4545	110	242	664		158	114	22	22	72,80
800 08 SPB	8	800	807	5	4545	110	242	754		158	114	22	22	92,00
900 08 SPB	8	900	907	5	4545	110	242	854		158	114	22	22	115,00
1000 08 SPB	8	1000	1007	5	5050	125	267	954		158	127	15,5	15,5	140,00
1250 08 SPB	8	1250	1257	5	5050	125	267	1204		158	127	15,5	15,5	204,00


SPB - 10

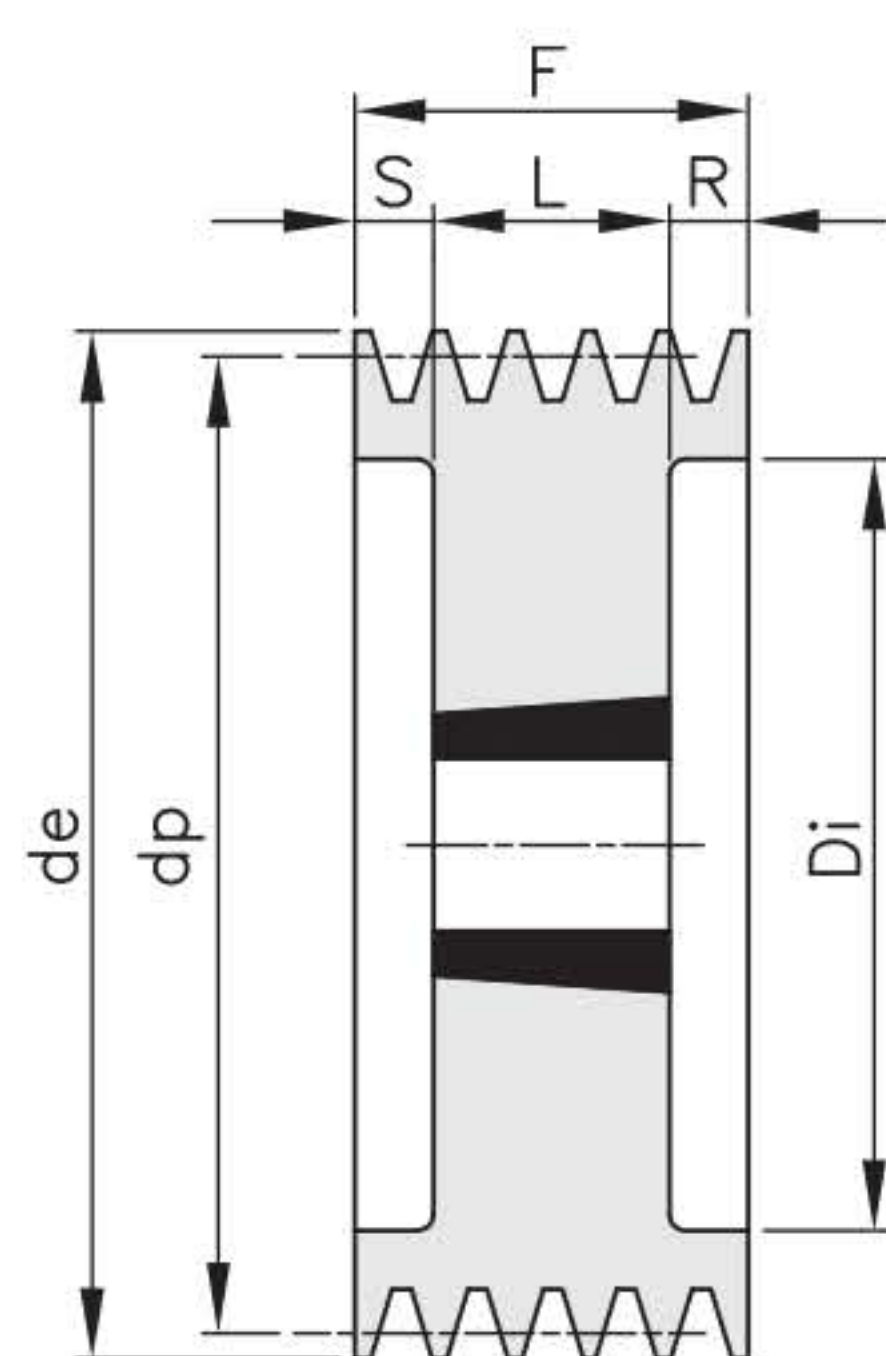

3

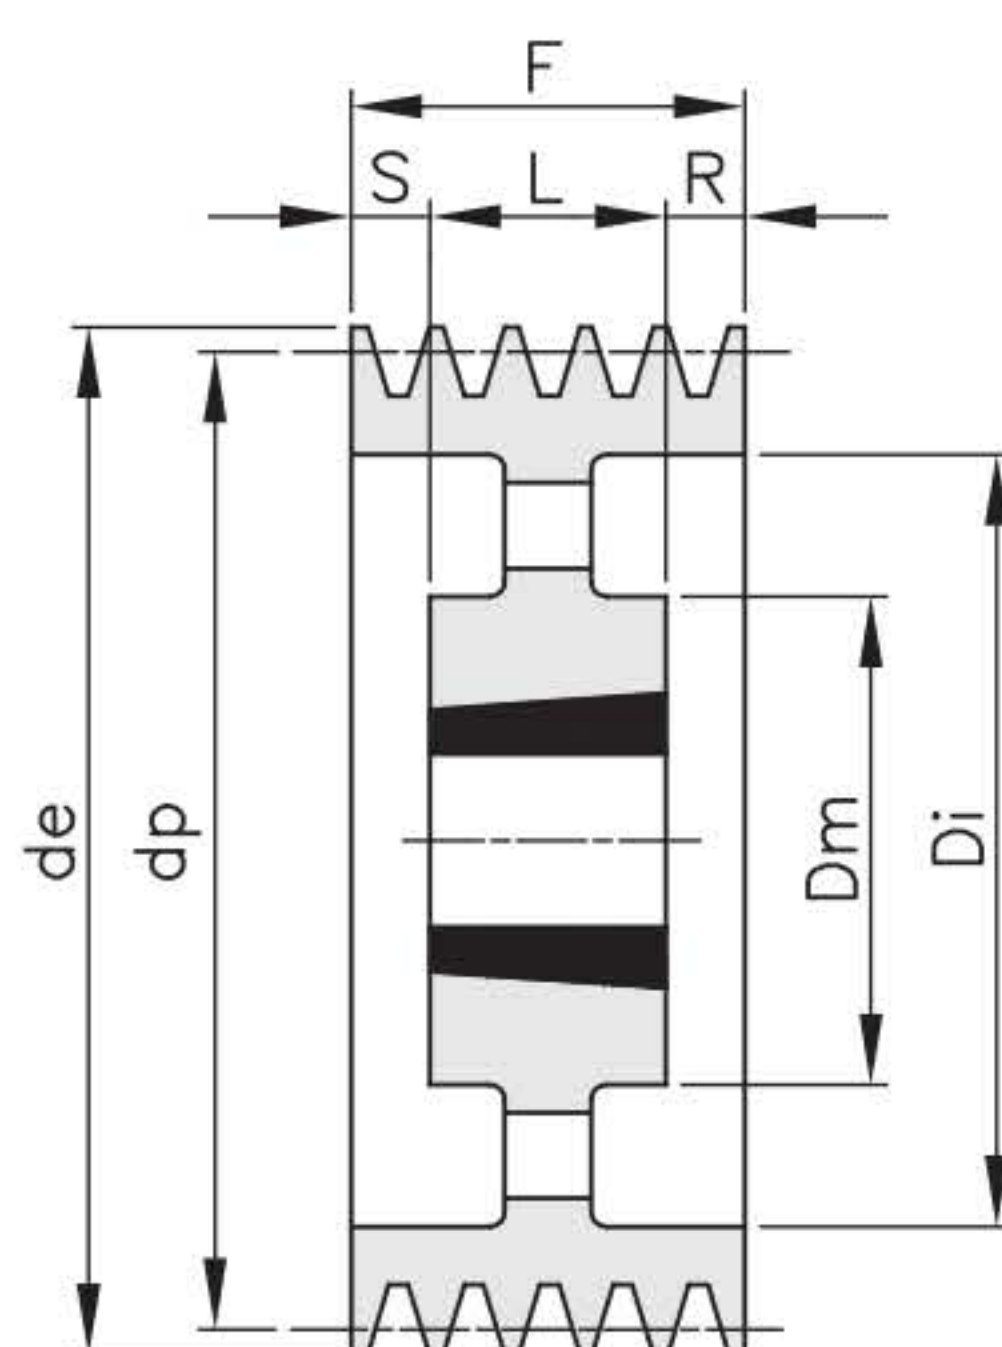


5

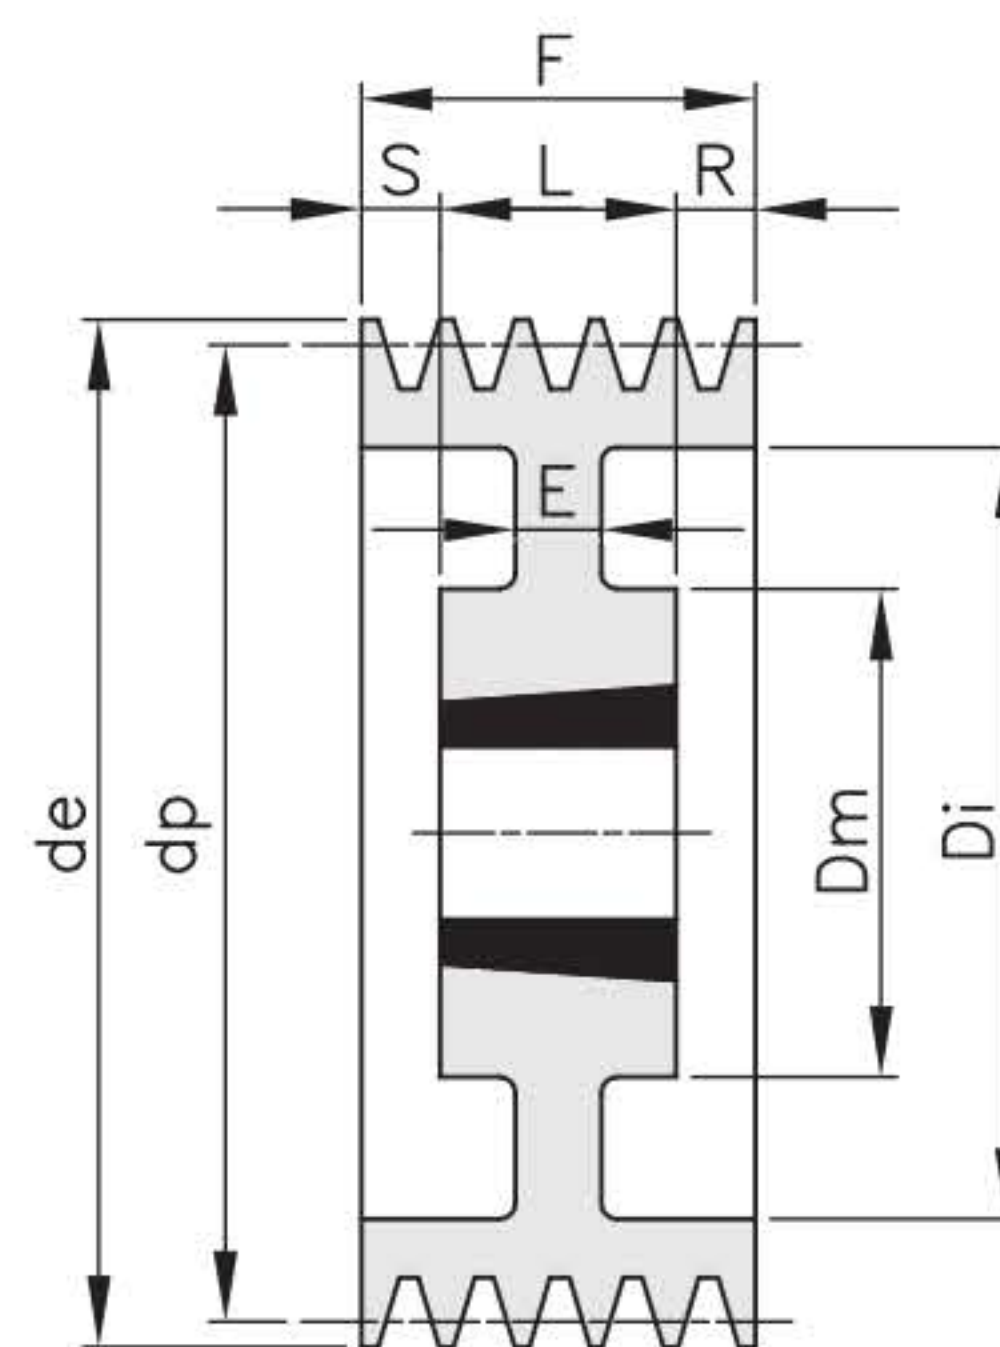


6

codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
224 10 SPB	10	224	231	3	3535	90		181		196	89	53,5	53,5	22,50
236 10 SPB	10	236	243	3	3535	90		193		196	89	53,5	53,5	25,00
250 10 SPB	10	250	257	3	3535	90		207		196	89	53,5	53,5	29,00
280 10 SPB	10	280	287	6	3535	90	175	237	30	196	89	53,5	53,5	31,50
315 10 SPB	10	315	322	6	3535	90	175	272	30	196	89	53,5	53,5	35,00
335 10 SPB	10	335	342	5	4040	100	210	292		196	102	47	47	37,00
355 10 SPB	10	355	362	5	4040	100	210	312		196	102	47	47	38,50
400 10 SPB	10	400	407	5	4040	100	210	357		196	102	47	47	40,50
450 10 SPB	10	450	457	5	4545	110	242	407		196	114	41	41	53,50
500 10 SPB	10	500	507	5	4545	110	242	457		196	114	41	41	58,00
560 10 SPB	10	560	567	5	4545	110	242	517		196	114	41	41	64,70
630 10 SPB	10	630	637	5	4545	110	242	587		196	114	41	41	72,00
710 10 SPB	10	710	717	5	4545	110	242	664		196	114	41	41	82,40
800 10 SPB	10	800	807	5	4545	110	242	754		196	114	41	41	103,00
900 10 SPB	10	900	907	5	5050	125	267	854		196	127	34,5	34,5	131,50
1000 10 SPB	10	1000	1007	5	5050	125	267	954		196	127	34,5	34,5	153,00


SPC - 3

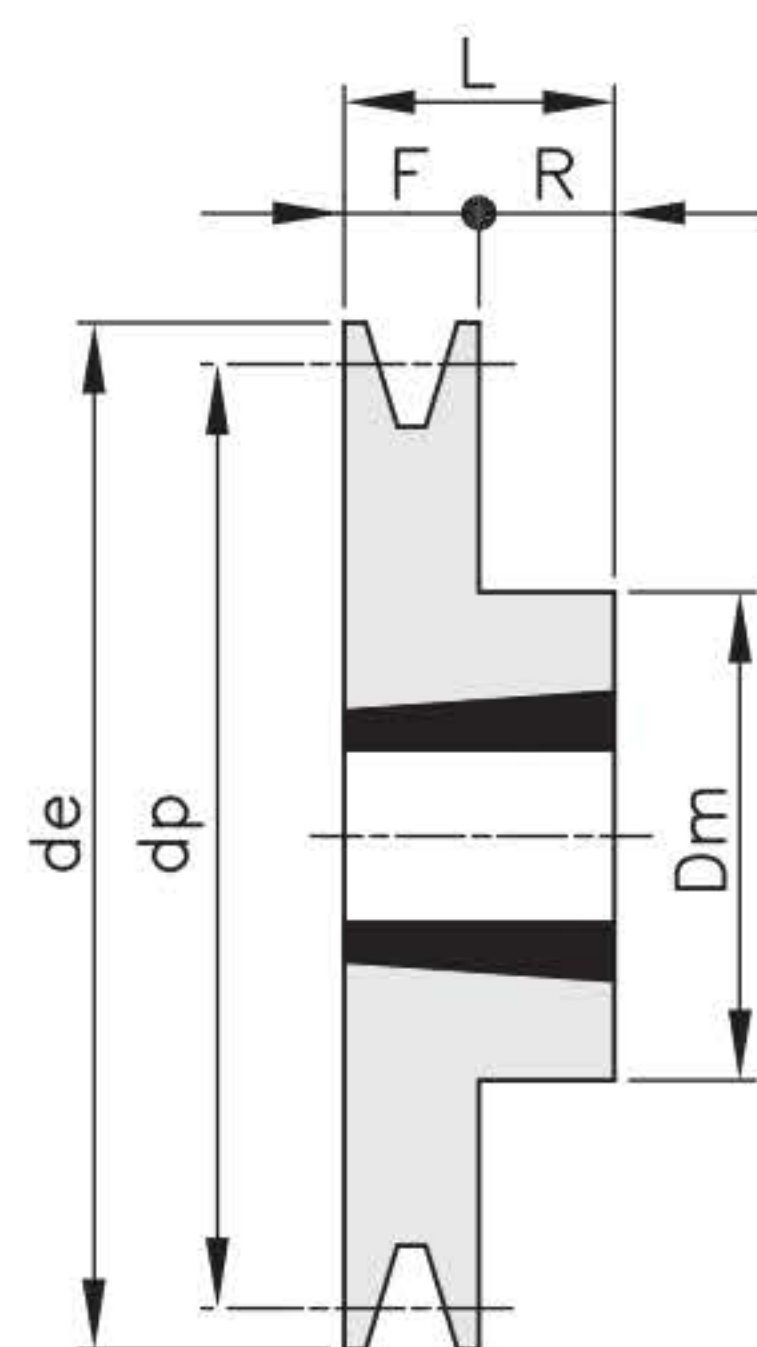

1

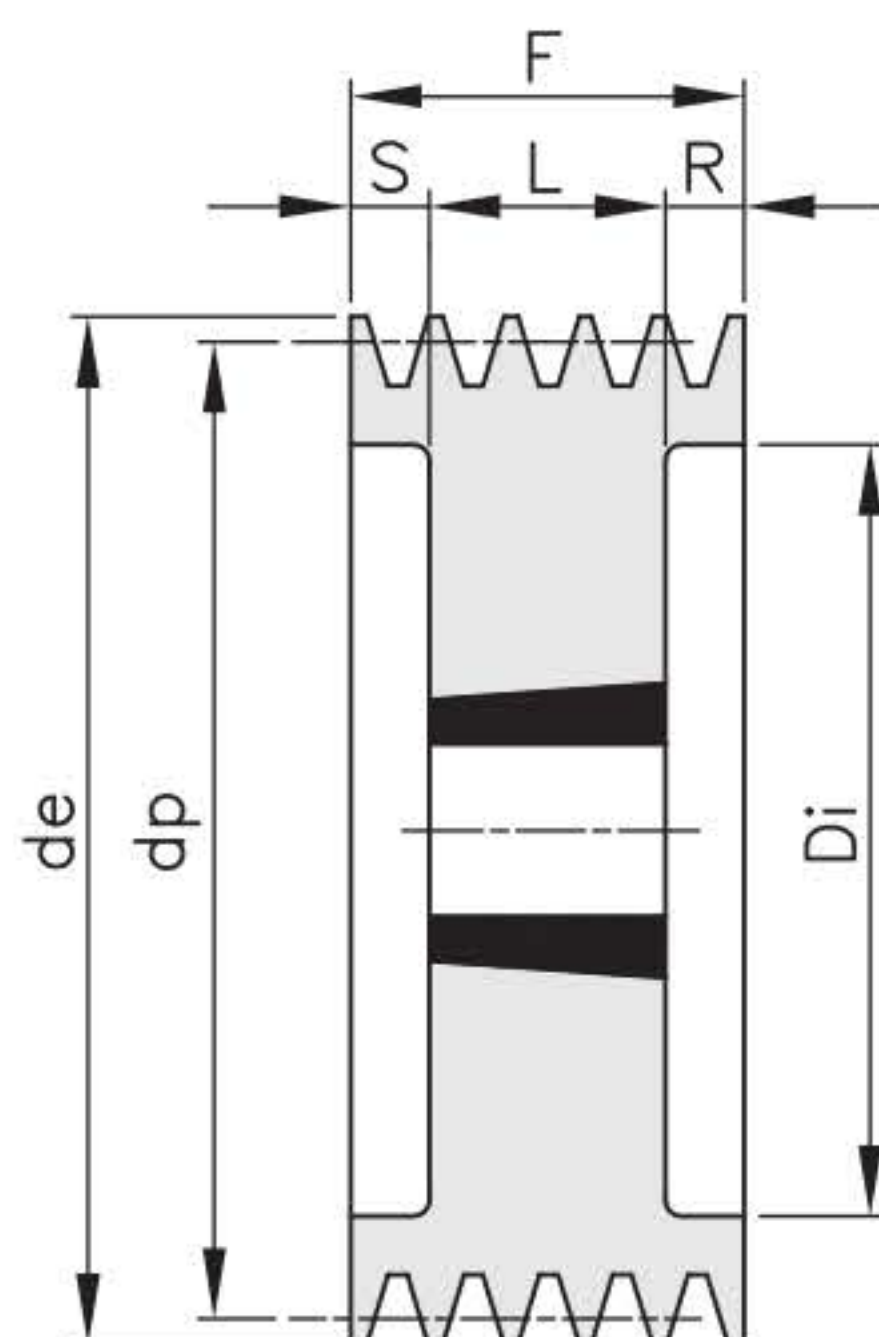


3

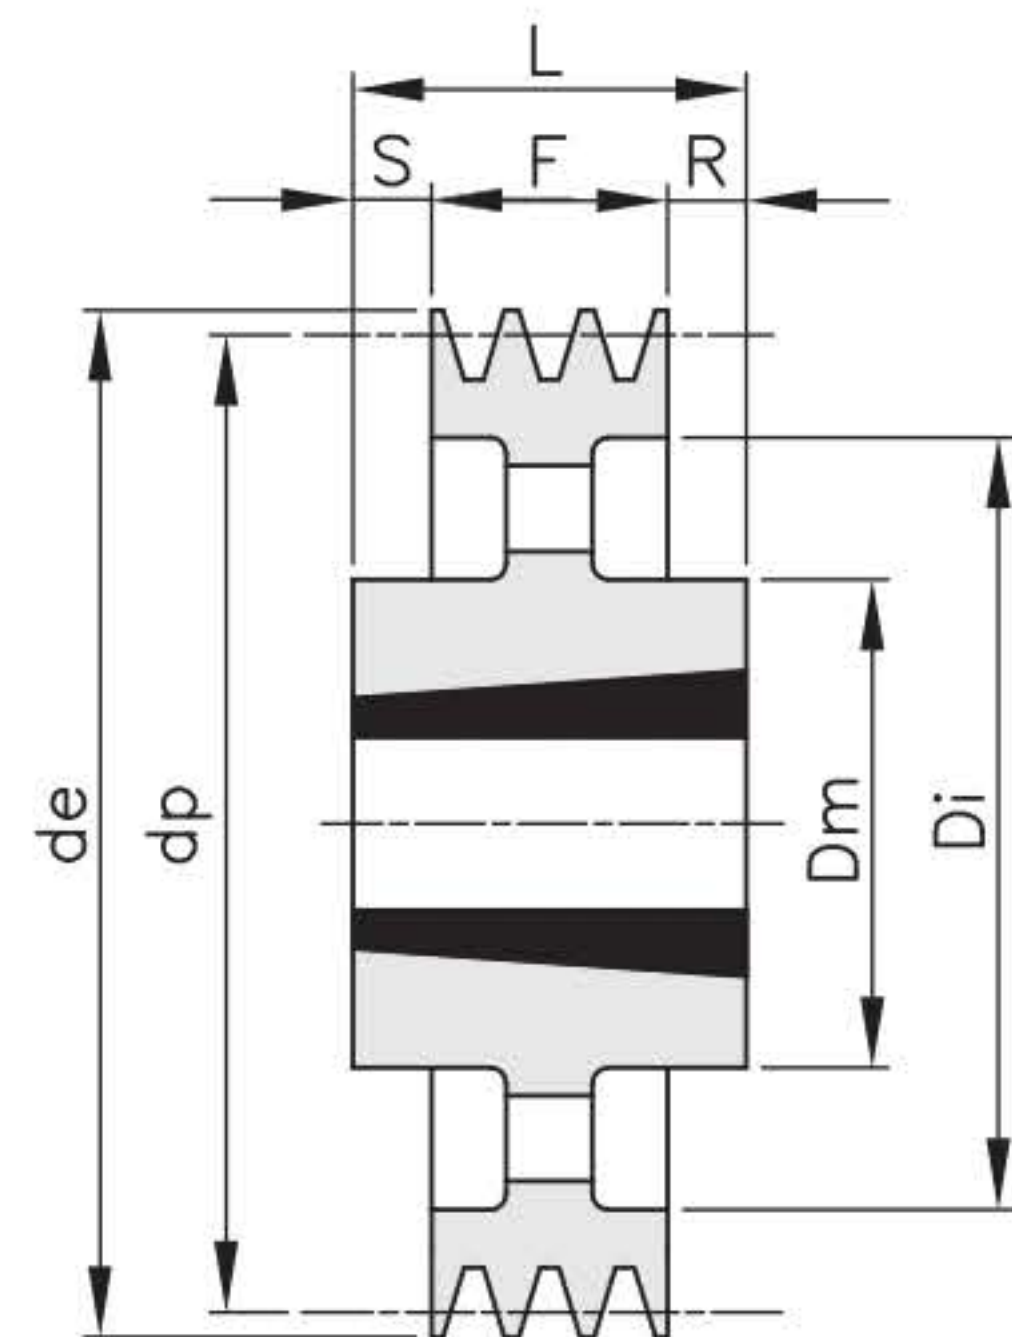


4

codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
200 03 SPC	3	200	209,6	3	2517	65		144		85	45	20	20	10,20
212 03 SPC	3	212	221,6	3	3020	75		156		85	51	17	17	11,00
224 03 SPC	3	224	233,6	3	3020	75		168		85	51	17	17	12,00
236 03 SPC	3	236	245,6	3	3020	75		180		85	51	17	17	13,00
250 03 SPC	3	250	259,6	3	3020	75		194		85	51	17	17	15,50
265 03 SPC	3	265	274,6	1	3535	90	175			85	89	4		17,20
280 03 SPC	3	280	289,6	1	3535	90	175			85	89	4		19,40
300 03 SPC	3	300	309,6	4	3535	90	175	244		85	89	2	2	22,60
315 03 SPC	3	315	324,6	4	3535	90	175	259		85	89	2	2	22,50
335 03 SPC	3	335	344,6	4	3535	90	175	279		85	89	2	2	23,50
355 03 SPC	3	355	364,6	4	3535	90	175	299		85	89	2	2	24,80
375 03 SPC	3	375	384,6	4	3535	90	175	319		85	89	2	2	25,50
400 03 SPC	3	400	409,6	4	3535	90	175	344		85	89	2	2	26,40
425 03 SPC	3	425	434,6	4	3535	90	175	369		85	89	2	2	27,00
450 03 SPC	3	450	459,6	4	3535	90	175	394		85	89	2	2	28,60
475 03 SPC	3	475	484,6	4	3535	90	175	419		85	89	2	2	30,00
500 03 SPC	3	500	509,6	4	3535	90	175	444		85	89	2	2	31,90
530 03 SPC	3	530	539,6	4	3535	90	175	474		85	89	2	2	34,50
560 03 SPC	3	560	569,6	4	3535	90	175	504		85	89	2	2	37,00
630 03 SPC	3	630	639,6	4	4040	100	210	574		85	102	8,5	8,5	44,50
800 03 SPC	3	800	809,6	4	4545	110	242	737		85	114	14,5	14,5	65,00
1000 03 SPC	3	1000	1009,6	4	5050	125	267	937		85	127	21	21	93,00
1250 03 SPC	3	1250	1259,6	4	5050	125	267	1187		85	127	21	21	101,00


SPC - 4

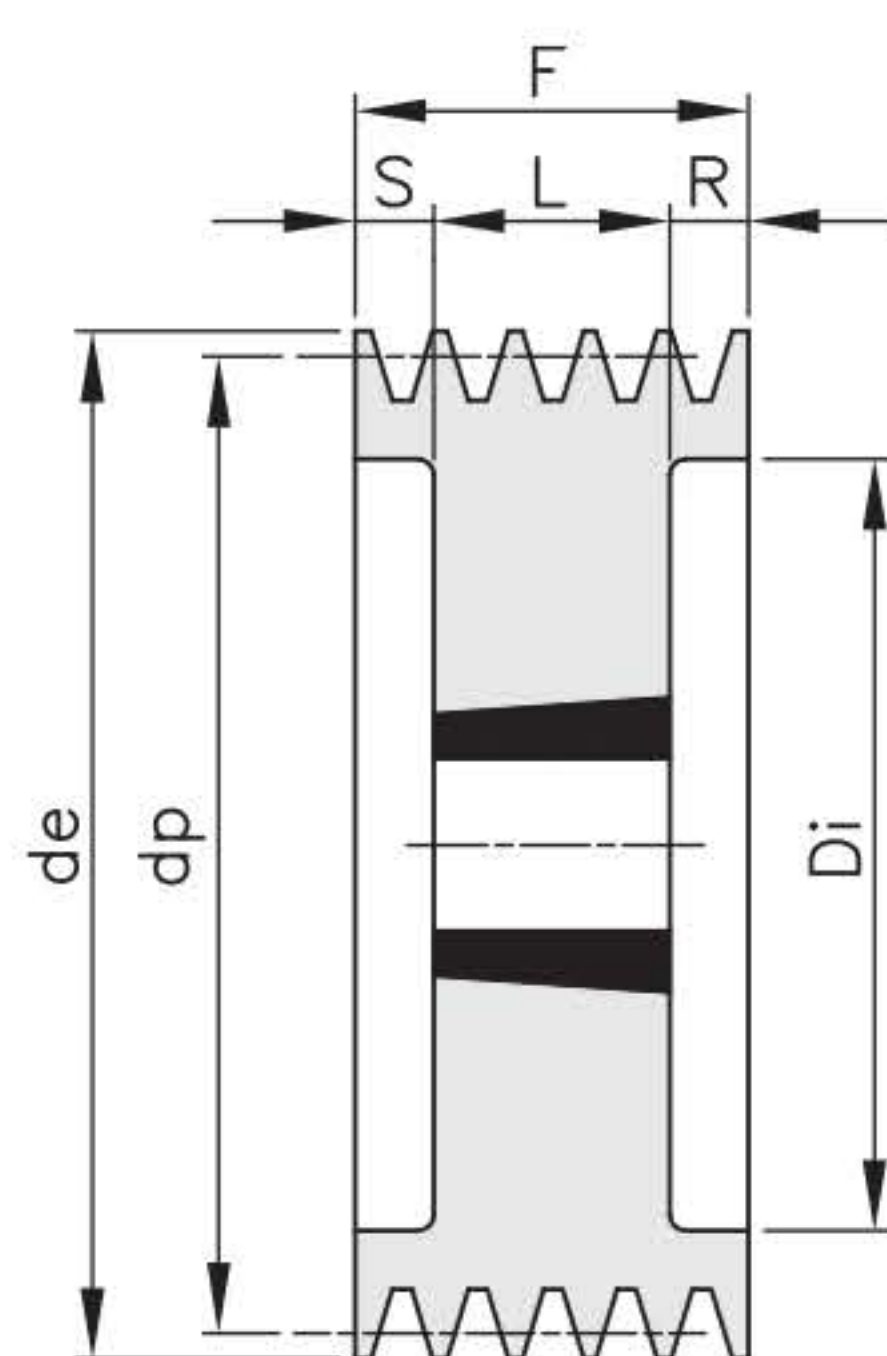


3

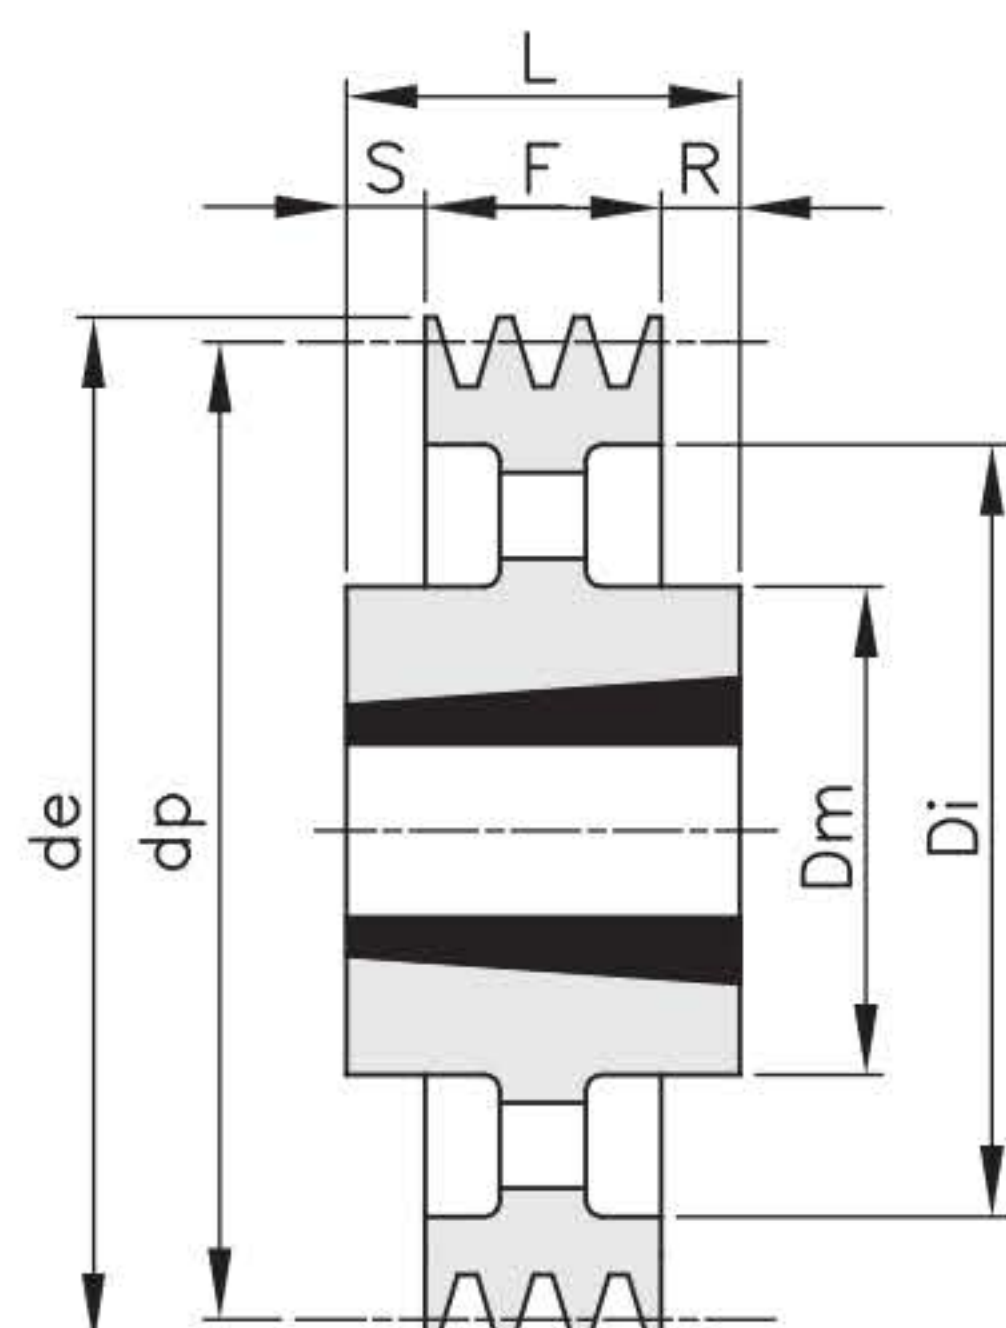

4

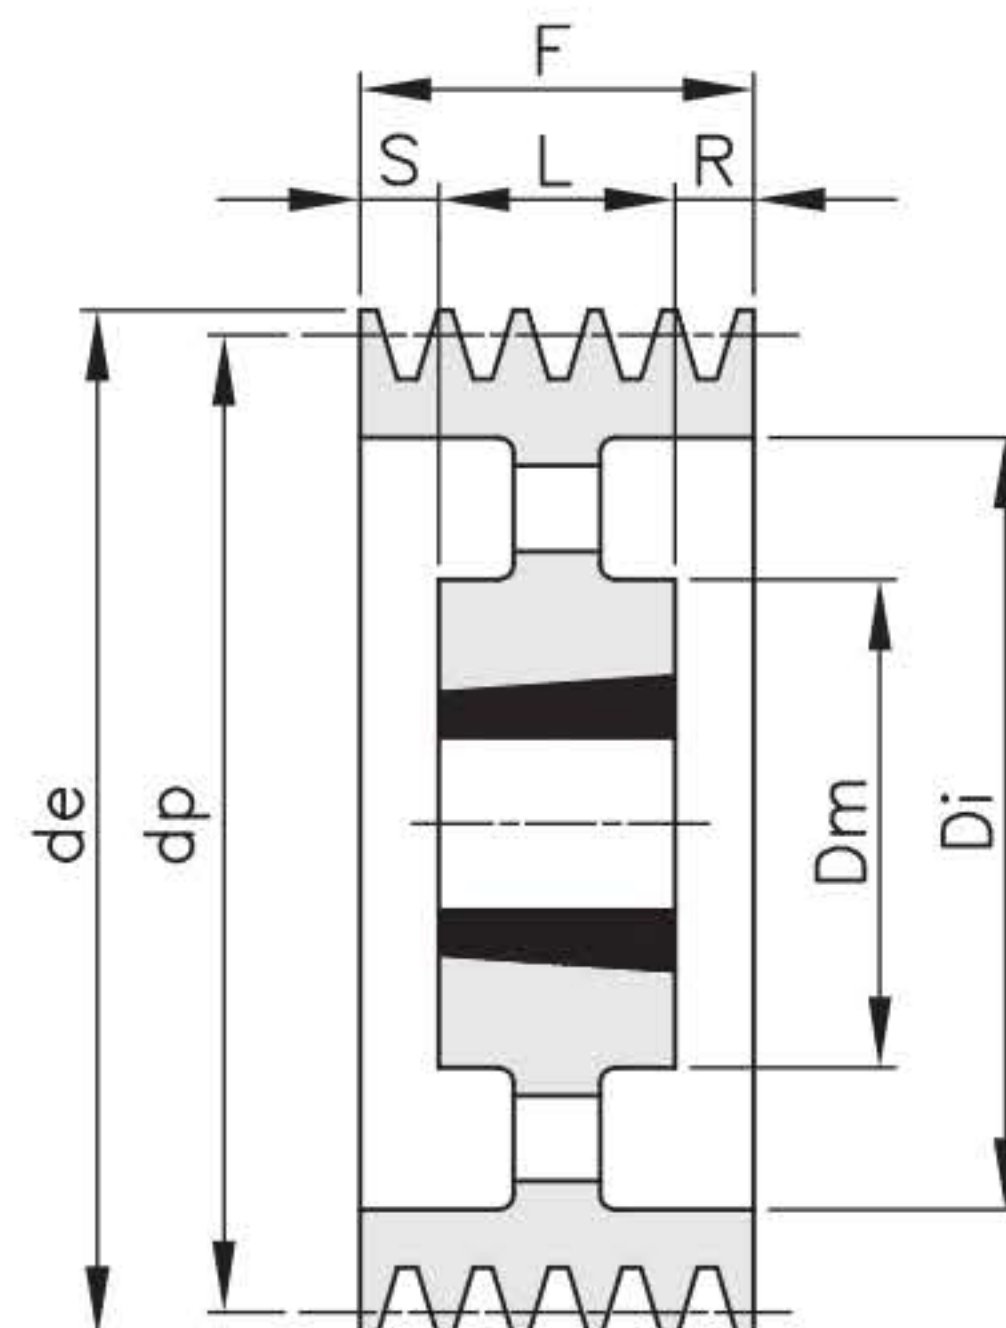


5

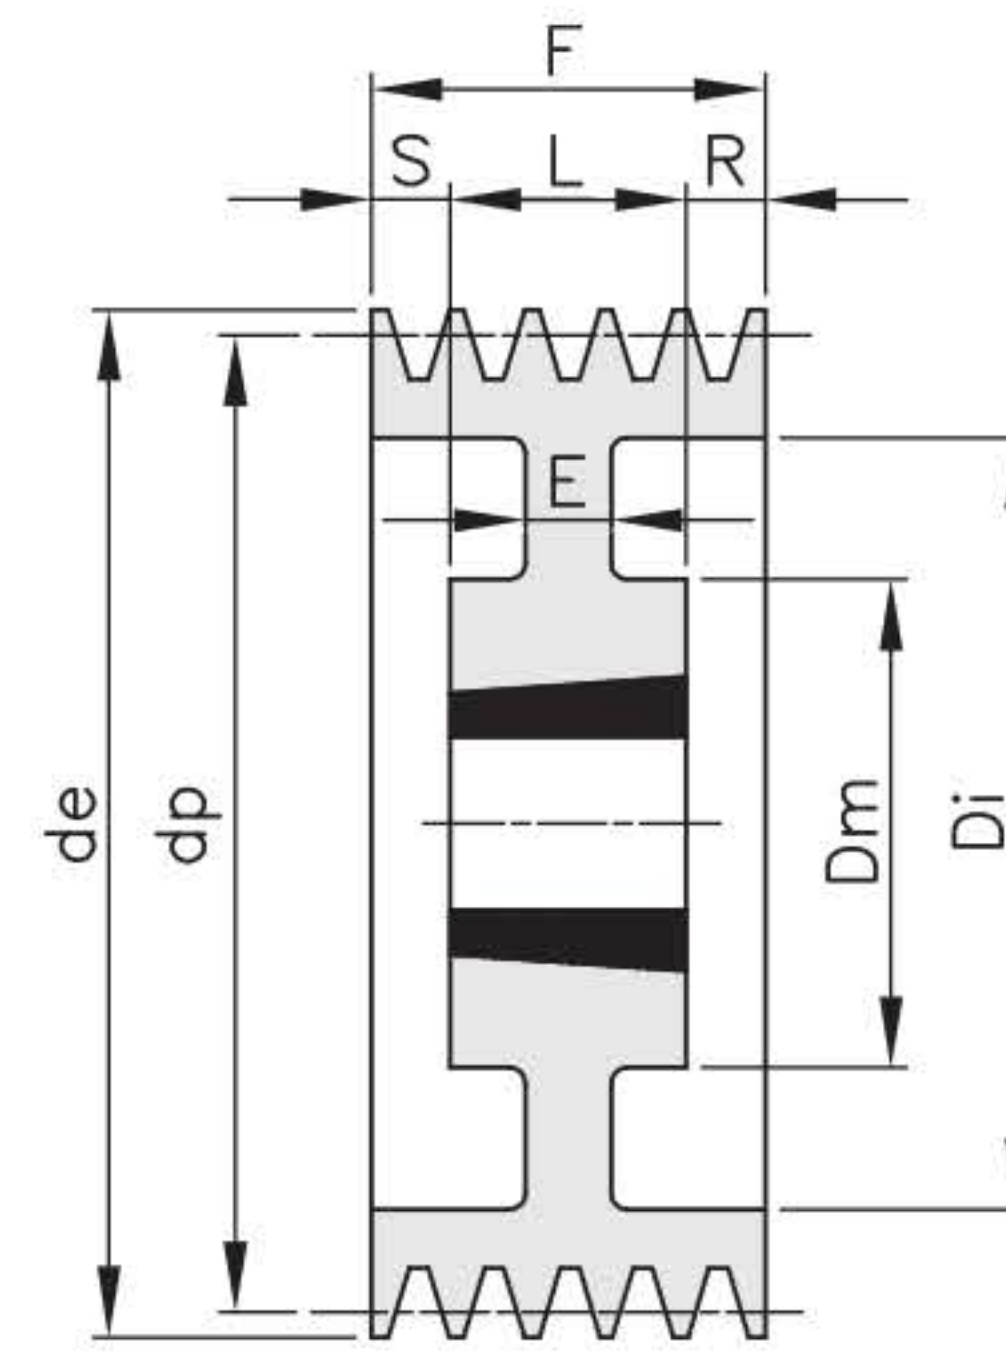


6

codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
200 04 SPC	4	200	209,6	3	3020	75		144		111	51	30	30	12,50
212 04 SPC	4	212	221,6	3	3020	75		156		111	51	30	30	13,50
224 04 SPC	4	224	233,6	3	3535	90		168		111	89	11	11	15,00
236 04 SPC	4	236	245,6	3	3535	90		180		111	89	11	11	18,20
250 04 SPC	4	250	259,6	3	3535	90		194		111	89	11	11	21,70
265 04 SPC	4	265	274,6	3	3535	90		209		111	89	11	11	23,00
280 04 SPC	4	280	289,6	6	3535	90	175	224	18	111	89	11	11	24,10
300 04 SPC	4	300	309,6	6	3535	90	175	244	20	111	89	11	11	25,00
315 04 SPC	4	315	324,6	5	3535	90	175	259		111	89	11	11	26,40
335 04 SPC	4	335	344,6	5	3535	90	175	279		111	89	11	11	27,50
355 04 SPC	4	355	364,6	5	3535	90	175	299		111	89	11	11	29,30
375 04 SPC	4	375	384,6	5	3535	90	175	319		111	89	11	11	31,00
400 04 SPC	4	400	409,6	5	3535	90	175	344		111	89	11	11	32,80
425 04 SPC	4	425	434,6	5	3535	90	175	369		111	89	11	11	33,40
450 04 SPC	4	450	459,6	5	3535	90	175	394		111	89	11	11	36,80
475 04 SPC	4	475	484,6	5	3535	90	175	419		111	89	11	11	38,00
500 04 SPC	4	500	509,6	5	3535	90	175	444		111	89	11	11	40,00
530 04 SPC	4	530	539,6	5	4040	100	210	474		111	102	4,5	4,5	45,00
560 04 SPC	4	560	569,6	5	4040	100	210	504		111	102	4,5	4,5	50,00
630 04 SPC	4	630	639,6	4	4545	110	242	574		111	114	1,5	1,5	58,00
710 04 SPC	4	710	719,6	4	5050	125	267	654		111	127	8	8	64,00
800 04 SPC	4	800	809,6	4	5050	125	267	737		111	127	8	8	76,50
1000 04 SPC	4	1000	1009,6	4	5050	125	267	937		111	127	8	8	105,00
1250 04 SPC	4	1250	1259,6	4	5050	125	267	1187		111	127	8	8	178,00


SPC - 5

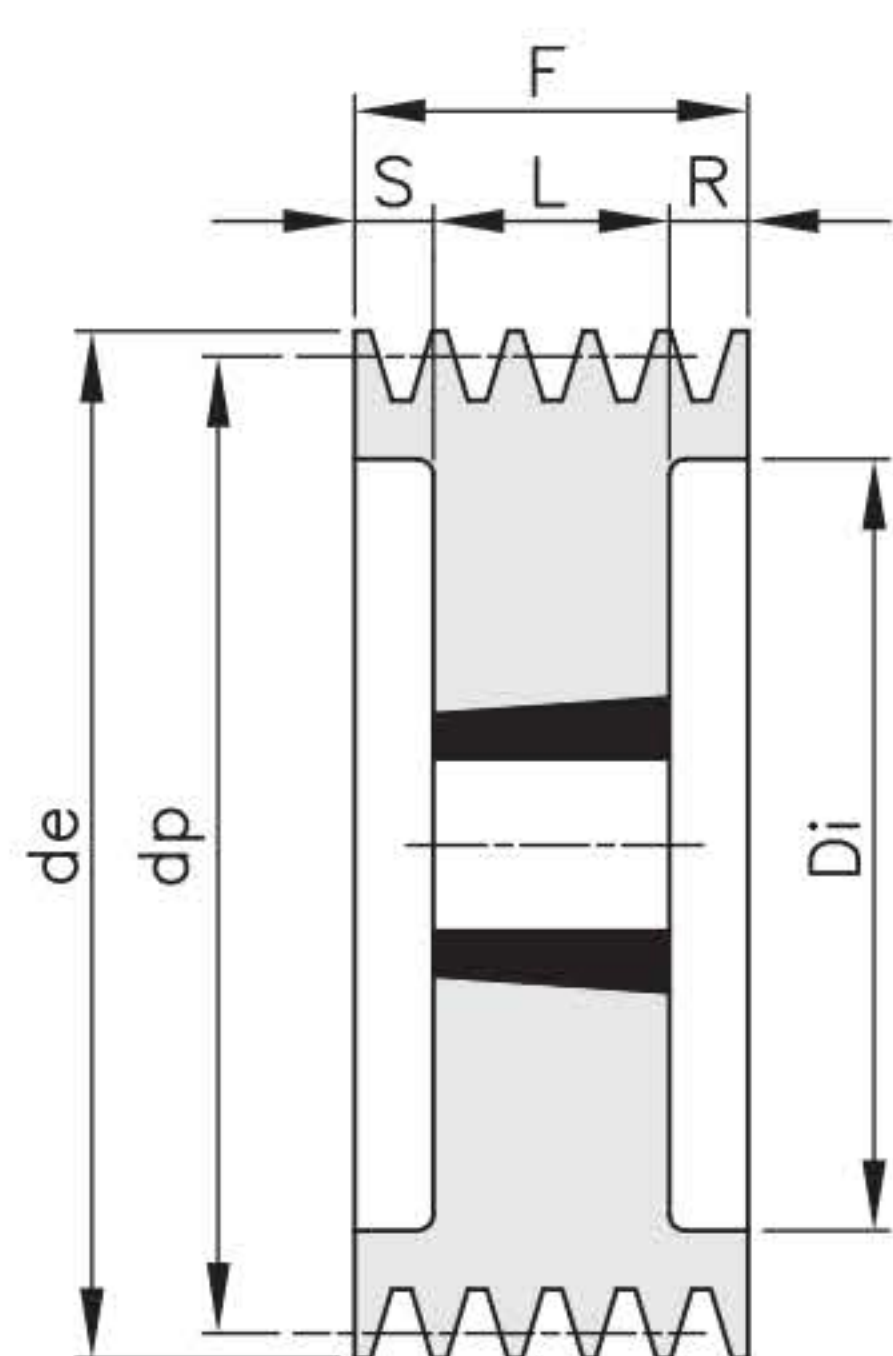


3

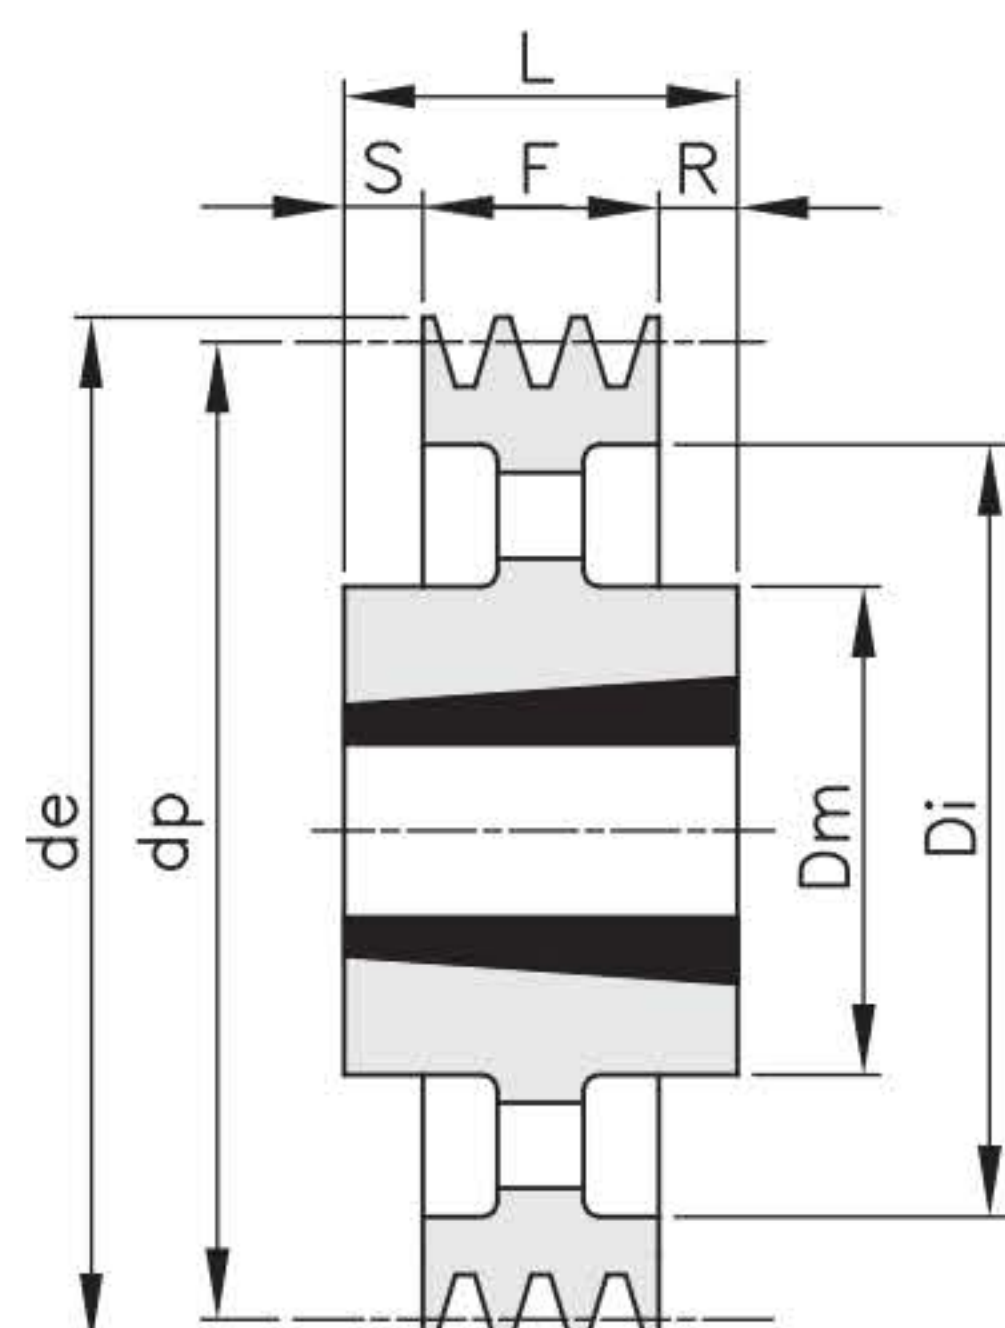

4

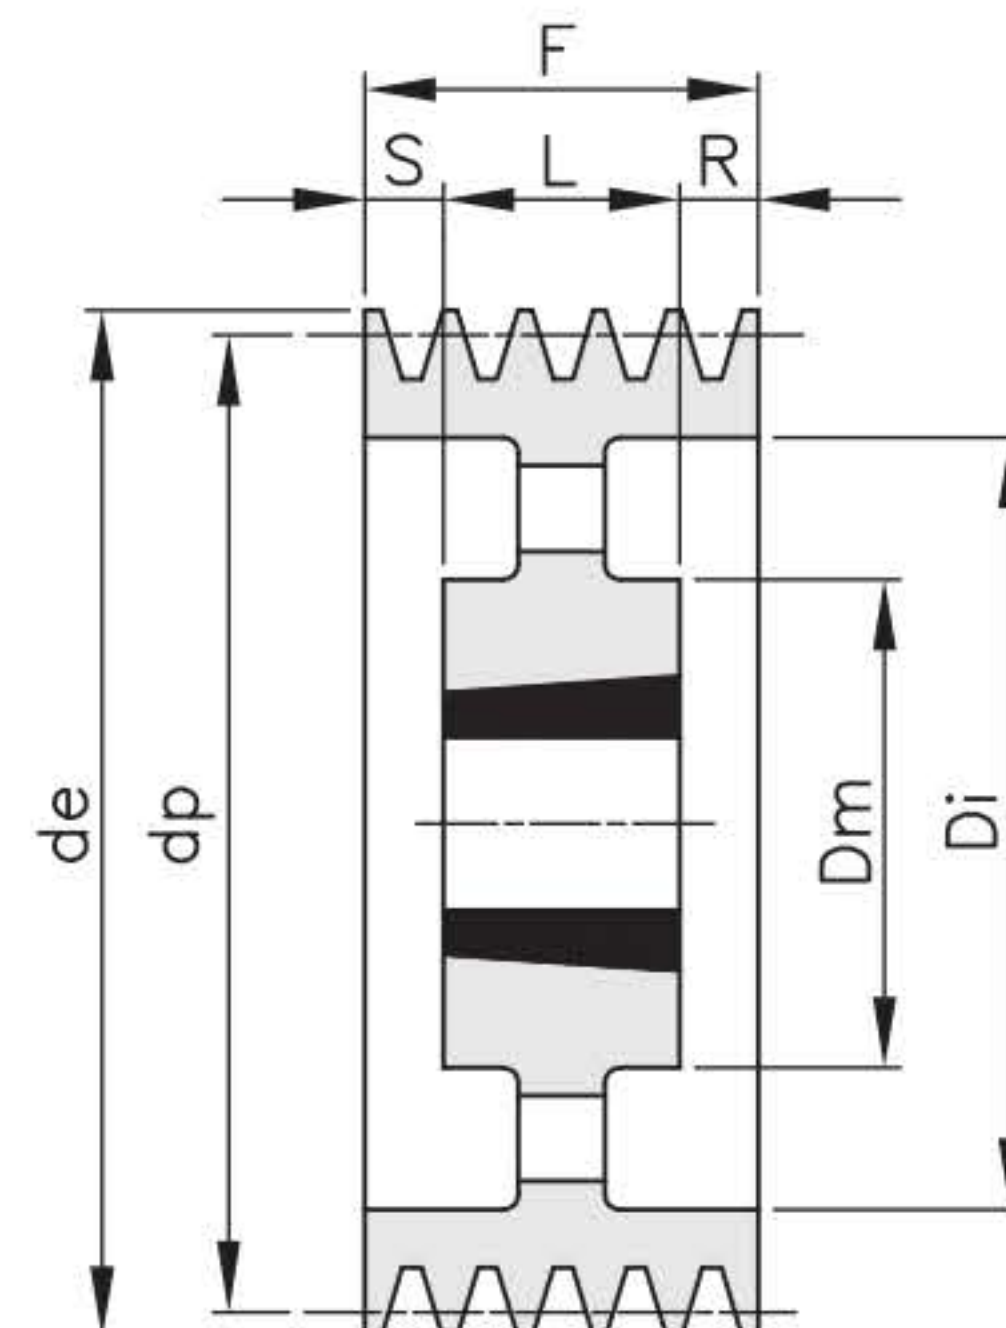


5

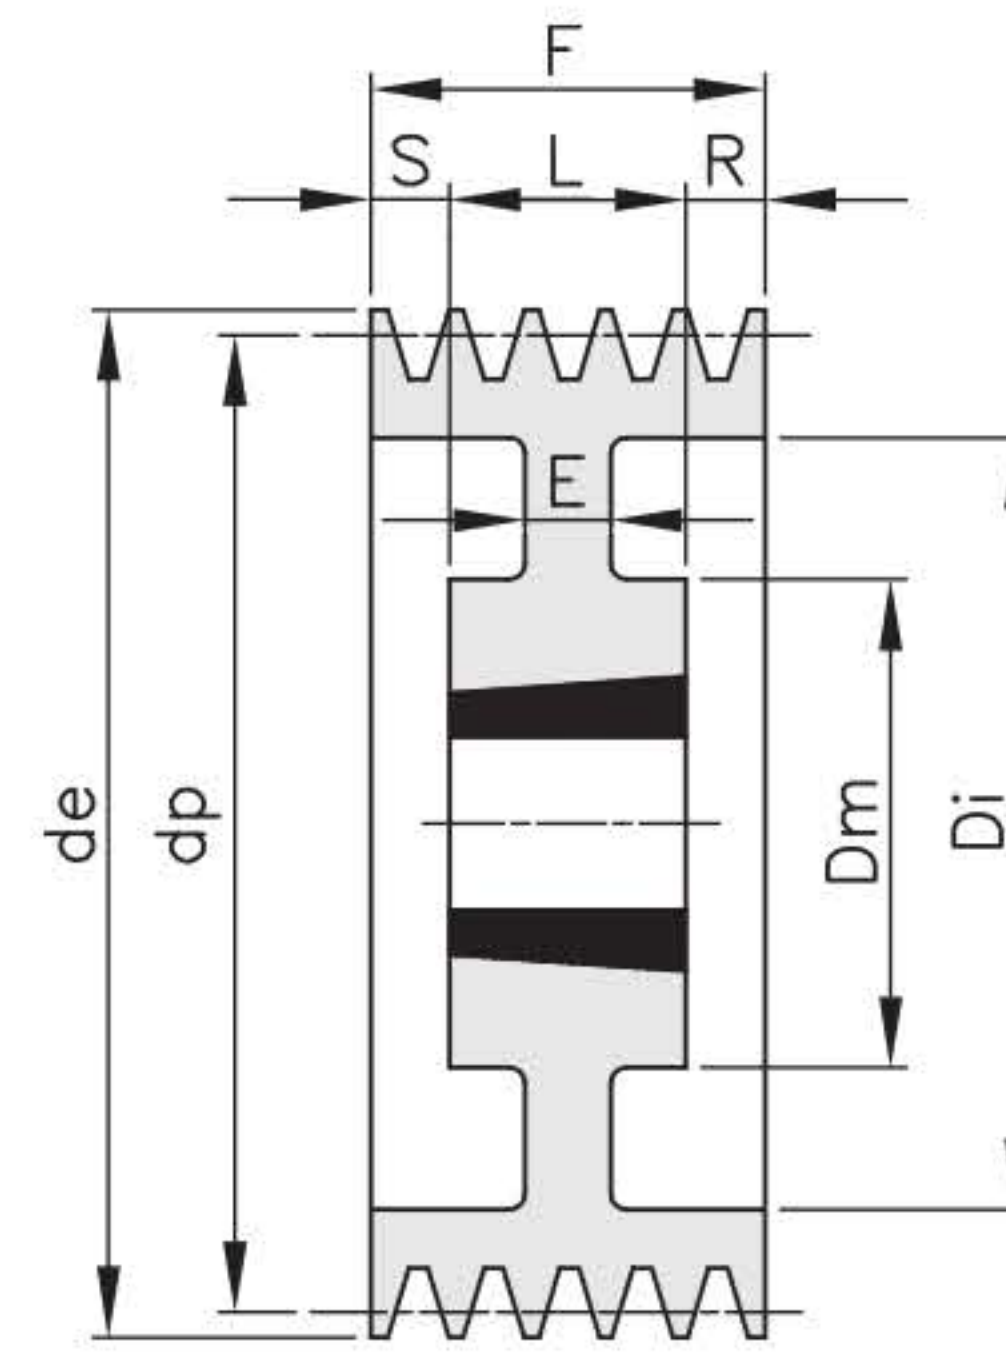


6

codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
200 05 SPC	5	200	209,6	3	3535	90		144		136	89	23,5	23,5	14,70
212 05 SPC	5	212	221,6	3	3535	90		156		136	89	23,5	23,5	15,00
224 05 SPC	5	224	233,6	3	3535	90		168		136	89	23,5	23,5	17,20
236 05 SPC	5	236	245,6	3	3535	90		180		136	89	23,5	23,5	20,20
250 05 SPC	5	250	259,6	3	3535	90		194		136	89	23,5	23,5	23,50
265 05 SPC	5	265	274,6	3	3535	90		209		136	89	23,5	23,5	25,50
280 05 SPC	5	280	289,6	3	3535	90		224		136	89	23,5	23,5	27,20
300 05 SPC	5	300	309,6	6	3535	90	175	244	20	136	89	23,5	23,5	28,50
315 05 SPC	5	315	324,6	5	3535	90	175	259		136	89	23,5	23,5	29,50
335 05 SPC	5	335	344,6	5	3535	90	175	279		136	89	23,5	23,5	31,00
355 05 SPC	5	355	364,6	5	3535	90	175	299		136	89	23,5	23,5	33,50
375 05 SPC	5	375	384,6	5	3535	90	175	319		136	89	23,5	23,5	36,00
400 05 SPC	5	400	409,6	5	3535	90	175	344		136	89	23,5	23,5	37,00
425 05 SPC	5	425	434,6	5	3535	90	175	369		136	89	23,5	23,5	43,00
450 05 SPC	5	450	459,6	5	4040	100	210	394		136	102	17	17	46,00
475 05 SPC	5	475	484,6	5	4040	100	210	419		136	102	17	17	50,30
500 05 SPC	5	500	509,6	5	4040	100	210	444		136	102	17	17	54,00
530 05 SPC	5	530	539,6	5	4545	110	240	474		136	114	11	11	57,50
560 05 SPC	5	560	569,6	5	4545	110	242	504		136	114	11	11	61,00
630 05 SPC	5	630	639,6	5	5050	125	267	574		136	127	4,5	4,5	75,00
710 05 SPC	5	710	719,6	5	5050	125	267	654		136	127	4,5	4,5	79,00
800 05 SPC	5	800	809,6	5	5050	125	267	737		136	127	4,5	4,5	96,50
1000 05 SPC	5	1000	1009,6	5	5050	125	267	937		136	127	4,5	4,5	139,00
1250 05 SPC	5	1250	1259,6	5	5050	125	267	1187		136	127	4,5	4,5	196,00


SPC - 6

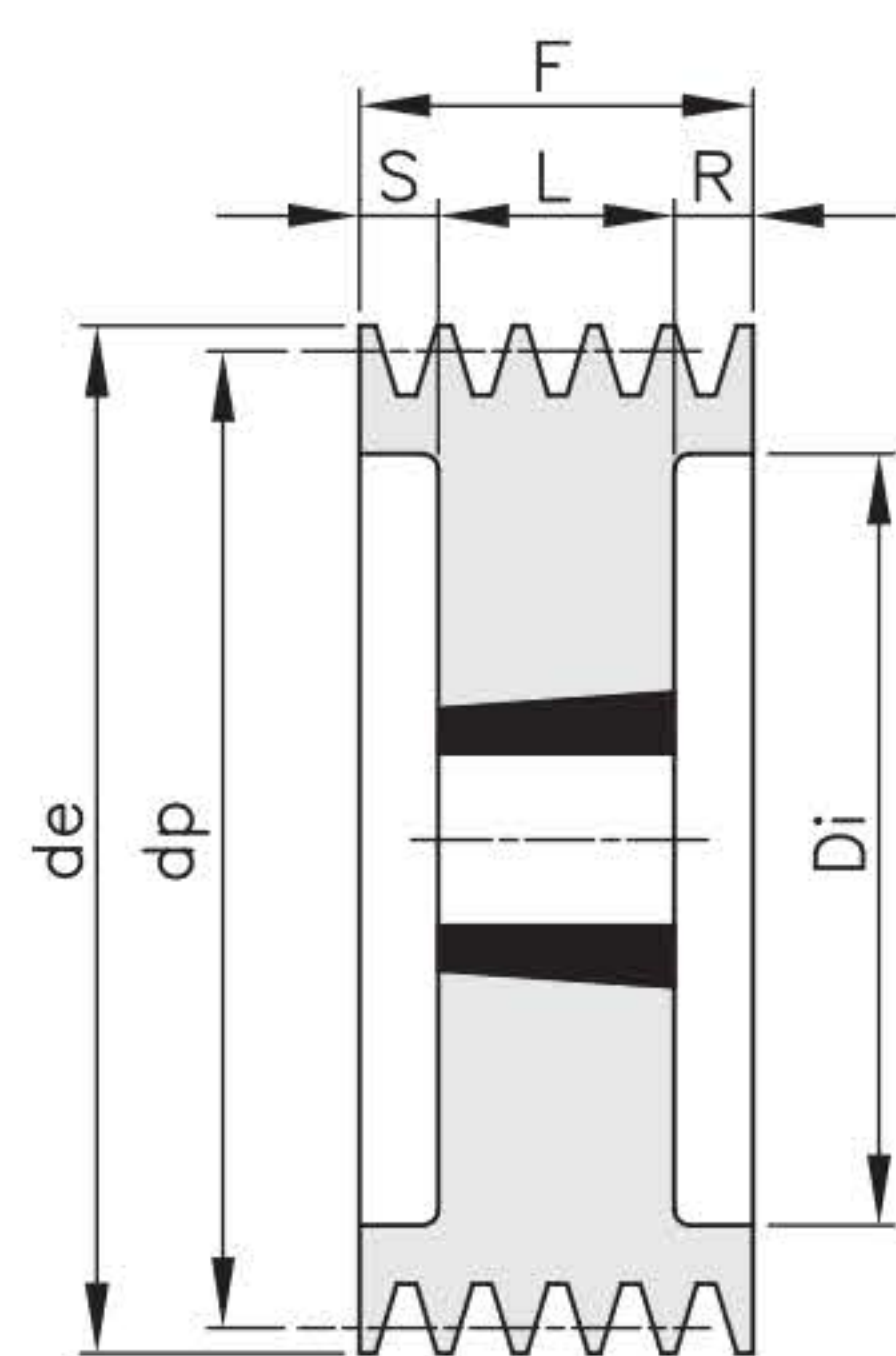

3

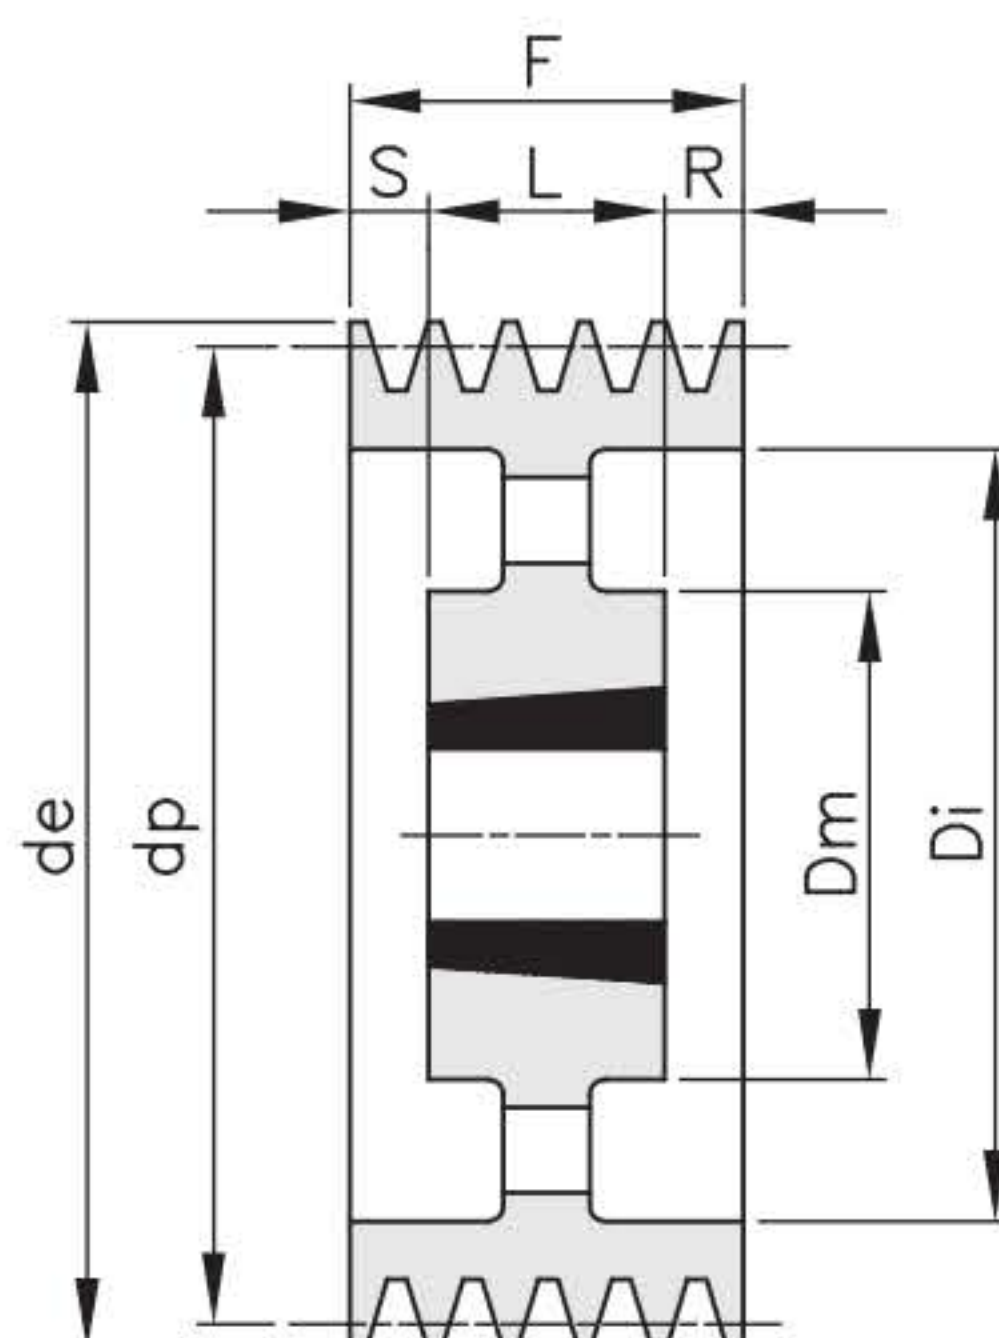

5

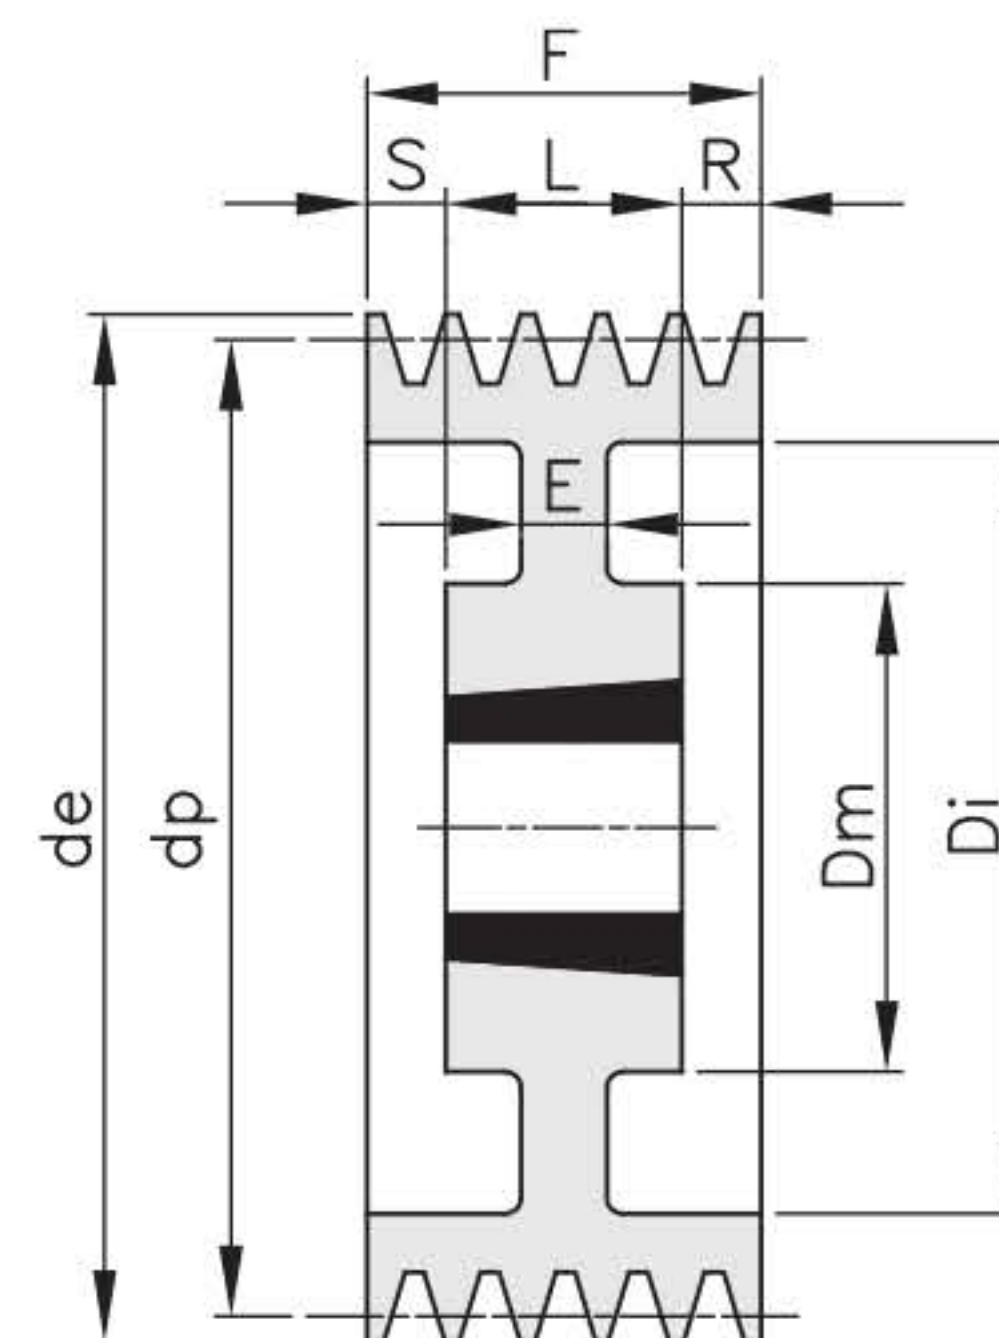

6

codice	gole	dp	de	tipo	bussola	foro max	Dm	Di	E	F	L	R	S	Kg.
200 06 SPC	6	200	209,6	3	3535	90		144		162	89	36,5	36,5	17,50
212 06 SPC	6	212	221,6	3	3535	90		156		162	89	36,5	36,5	19,00
224 06 SPC	6	224	233,6	3	3535	90		168		162	89	36,5	36,5	21,00
236 06 SPC	6	236	245,6	3	3535	90		180		162	89	36,5	36,5	23,00
250 06 SPC	6	250	259,6	3	3535	90		194		162	89	36,5	36,5	26,00
265 06 SPC	6	265	274,6	3	3535	90		209		162	89	36,5	36,5	27,00
280 06 SPC	6	280	289,6	6	3535	90	175	224	20	162	89	36,5	36,5	29,00
300 06 SPC	6	300	309,6	6	3535	90	175	244	20	162	89	36,5	36,5	31,50
315 06 SPC	6	315	324,6	5	3535	90	175	259		162	89	36,5	36,5	33,20
335 06 SPC	6	335	344,6	5	3535	90	175	279		162	89	36,5	36,5	35,00
355 06 SPC	6	355	364,6	5	3535	90	175	299		162	89	36,5	36,5	37,00
375 06 SPC	6	375	384,6	5	4040	100	210	319		162	102	30	30	42,50
400 06 SPC	6	400	409,6	5	4040	100	210	344		162	102	30	30	47,50
425 06 SPC	6	425	434,6	5	4040	100	210	369		162	102	30	30	55,60
450 06 SPC	6	450	459,6	5	4545	110	242	394		162	114	24	24	62,50
475 06 SPC	6	475	484,6	5	4545	110	242	419		162	114	24	24	65,00
500 06 SPC	6	500	509,6	5	4545	110	242	444		162	114	24	24	68,20
530 06 SPC	6	530	539,6	5	5050	125	265	474		162	127	17,5	17,5	73,00
560 06 SPC	6	560	569,6	5	5050	125	267	504		162	127	17,5	17,5	86,00
630 06 SPC	6	630	639,6	5	5050	125	267	574		162	127	17,5	17,5	96,00
710 06 SPC	6	710	719,6	5	5050	125	267	654		162	127	17,5	17,5	102,00
800 06 SPC	6	800	809,6	5	5050	125	267	737		162	127	17,5	17,5	120,00
1000 06 SPC	6	1000	1009,6	5	5050	125	267	937		162	127	17,5	17,5	160,00
1250 06 SPC	6	1250	1259,6	5	5050	125	267	1187		162	127	17,5	17,5	232,70

